

Summary

Single-phase buck-boost transformer. Steps up 100V to 115V at 30 amps continuous output. 3.45 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 100V building supply to 115V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 115V that is installed on a 100V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 30-amp buck-boost transformer is significantly smaller and lighter than a 30-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-100V-115V-30A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	3.45 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	100V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	34.50A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	115V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	30A	Winding Material	Aluminum
Maximum Primary OCP	50A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	17 lbs
Temperature Rise	115°C	Dimensions	4.65"-W x 3.86"-D x 9.25"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Front, Top, and Side.

Front View:

- Overall Width: 4.65"
- Overall Height: 9.25"
- Top Section Width: 4.77"
- Top Section Height: 0.82"
- Top Section Width (Inner): 3.15"
- Top Section Width (Inner): 1.97"
- Ground hole: $\varnothing 0.2$ "
- Ground hole offset: 3.01"
- Ground hole offset: 1.18"
- Ground hole offset: 0.08"
- Ground hole offset: 1.63"
- Ground hole offset: 1.95"
- Ground hole offset: 0.86"

Top View:

- Overall Width: 4.65"
- Overall Height: 3.86"
- Top Section Width: 4.65"
- Top Section Height: 2.32"
- Top Section Width (Inner): 1.16"
- Top Section Width (Inner): 2.09"
- Top Section Width (Inner): 0.98"
- Top Section Width (Inner): 0.86"
- Top Section Width (Inner): 1.63"
- Top Section Width (Inner): 1.95"
- Top Section Width (Inner): 0.08"
- Top Section Width (Inner): 1.18"
- Top Section Width (Inner): 3.01"
- Top Section Width (Inner): $\varnothing 0.2$ "

Side View:

- Overall Width: 4.65"
- Overall Height: 9.25"
- Top Section Width: 4.77"
- Top Section Height: 0.82"
- Top Section Width (Inner): 3.15"
- Top Section Width (Inner): 1.97"
- Ground hole: $\varnothing 0.2$ "
- Ground hole offset: 3.01"
- Ground hole offset: 1.18"
- Ground hole offset: 0.08"
- Ground hole offset: 1.63"
- Ground hole offset: 1.95"
- Ground hole offset: 0.86"


Bottom (Underside) Plate:

- Overall Width: 4.65"
- Overall Height: 3.86"
- Top Section Width: 4.65"
- Top Section Height: 2.32"
- Top Section Width (Inner): 1.16"
- Top Section Width (Inner): 2.09"
- Top Section Width (Inner): 0.98"
- Top Section Width (Inner): 0.86"
- Top Section Width (Inner): 1.63"
- Top Section Width (Inner): 1.95"
- Top Section Width (Inner): 0.08"
- Top Section Width (Inner): 1.18"
- Top Section Width (Inner): 3.01"
- Top Section Width (Inner): $\varnothing 0.2$ "

Connection Guide

1. Connect **X4** and **X2** together
2. Connect High Voltage **L1** to **X4** and **X3**
3. Connect **X2** and **X1** together
4. Connect Low Voltage **L1** to **X1**, **X2**, **H4**, **H3**
5. Connect High & Low Voltage **L2** to **H1** and **H2**

DIAGRAM A2

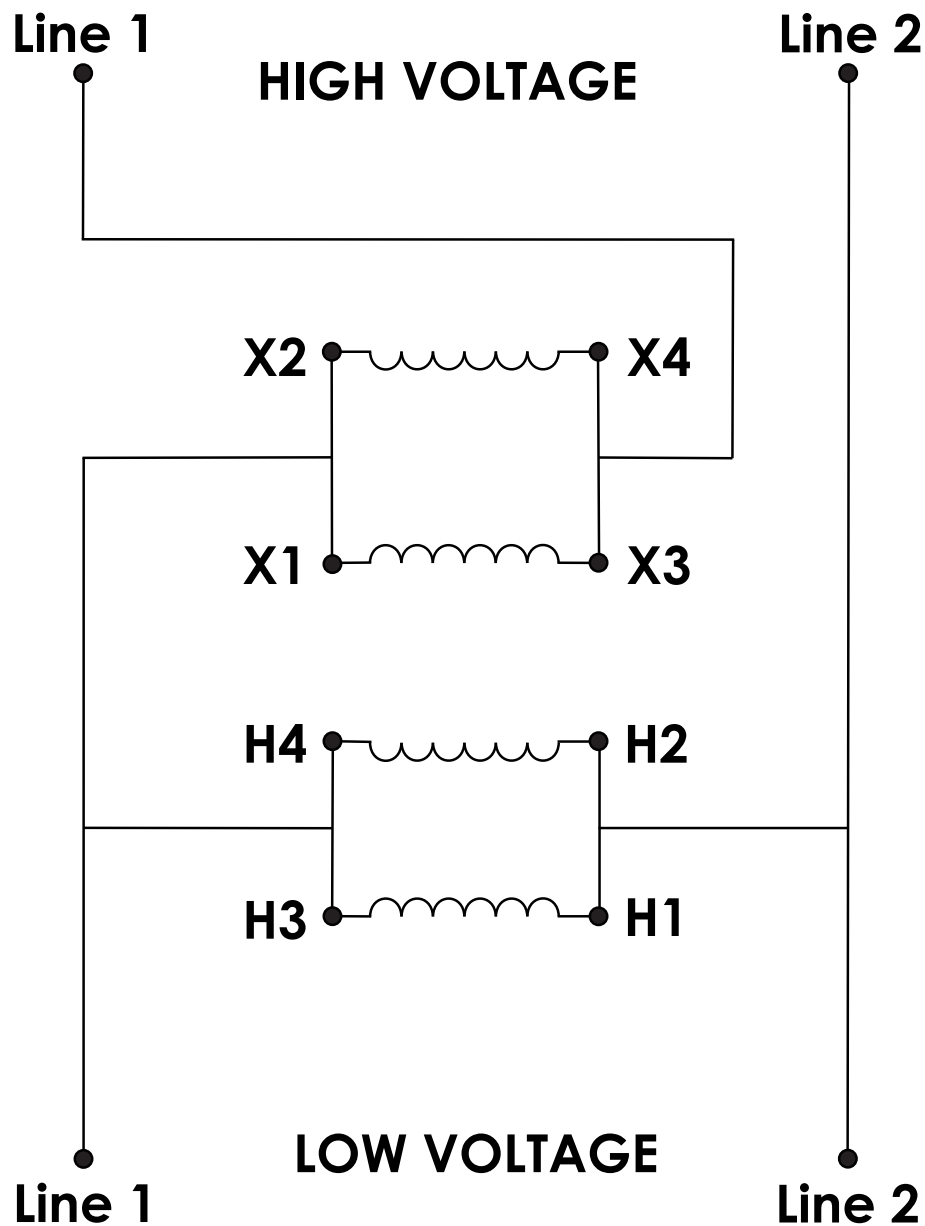



TX-BB-100V-115V-30A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core