



Summary

Single-phase buck-boost transformer. Steps up 120V to 125V at 40 amps continuous output. 5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 120V building supply to 125V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 125V that is installed on a 120V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 40-amp buck-boost transformer is significantly smaller and lighter than a 40-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-120V-125V-5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	120V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	41.67A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	125V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	40A	Winding Material	Aluminum
Maximum Primary OCP	60A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	11 lbs
Temperature Rise	115°C	Dimensions	4.65"-W x 3.86"-D x 8.07"-H

Ratings & Certifications


- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Top View Dimensions:

- Overall Width: 8.07"
- Overall Height: 4.65"
- Top Section Width: 4.77"
- Top Section Height: 0.82"
- Distance between top screws: 1.97"
- Distance from left edge to center of top screws: 3.15"
- Ground hole diameter: Ø 0.2"
- Distance from left edge to center of ground hole: 3.01"
- Distance from right edge to center of ground hole: 1.18"
- Bottom Flange Width: 1.63"
- Bottom Flange Height: 0.08"
- Bottom Flange Radius: 0.86"
- Distance between bottom screws: 1.95"

Side View Dimensions:

- Overall Height: 9.78"
- Knockout Diameter: (1) 1/2" NPT Knockout Per Side
- Knockout Position: 1.89" from left edge, 1.57" from bottom flange
- M3 Screw Location: 0.39" from knockout, 0.08" from bottom flange
- Bottom Flange Width: 3.86"
- Bottom Flange Height: 2.05"
- Bottom Flange Radius: 0.86"

Bottom View Dimensions:


- Overall Width: 4.65"
- Overall Height: 3.86"
- Distance between knockouts: 2.32"
- Distance from left edge to first knockout: 1.16"
- Distance from right edge to last knockout: 0.98"
- Distance from top edge to first knockout: 2.09"
- Knockout Pattern: (4) 1/2" NPT

Bottom (Underside) Plate

Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

DIAGRAM D2

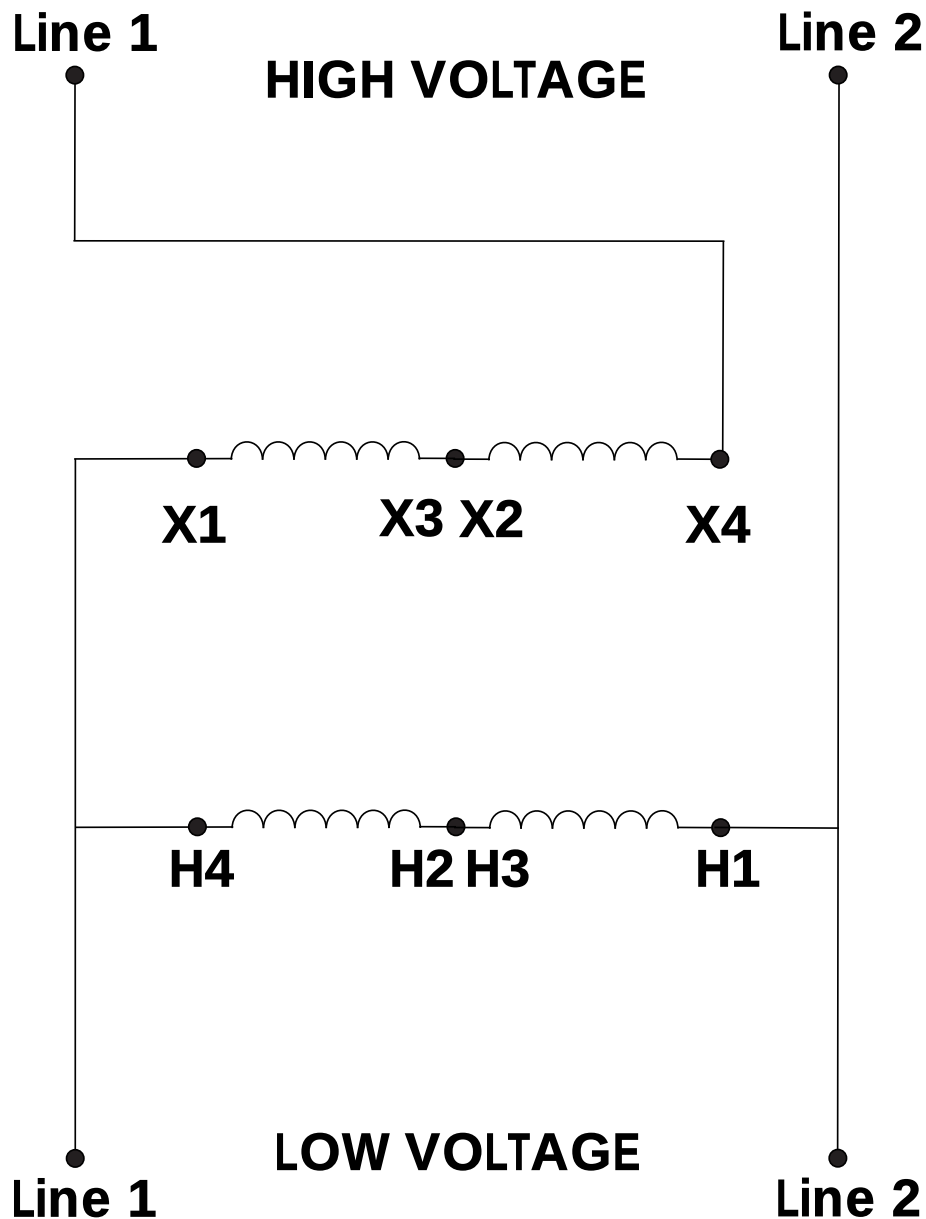



TX-BB-120V-125V-5KVA — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core