

Summary

Single-phase buck-boost transformer. Steps up 195V to 208V at 5 amps continuous output. 1.04 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 195V building supply to 208V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 208V that is installed on a 195V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 5-amp buck-boost transformer is significantly smaller and lighter than a 5-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-195V-208V-5A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	1.04 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	195V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	5.33A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	208V	Termination Access	(6) 1/2" NPT Hubs
Secondary Amperage	5A	Winding Material	Aluminum
Maximum Primary OCP	15A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	8 lbs
Temperature Rise	115°C	Dimensions	4.65 x 3.86 x 8.07

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.




Part # — TX-BB-195V-208V-5A

Buck-Boost Transformer Specification Sheet

Available at XFMR Direct

Page 2 of 9


Dimensions

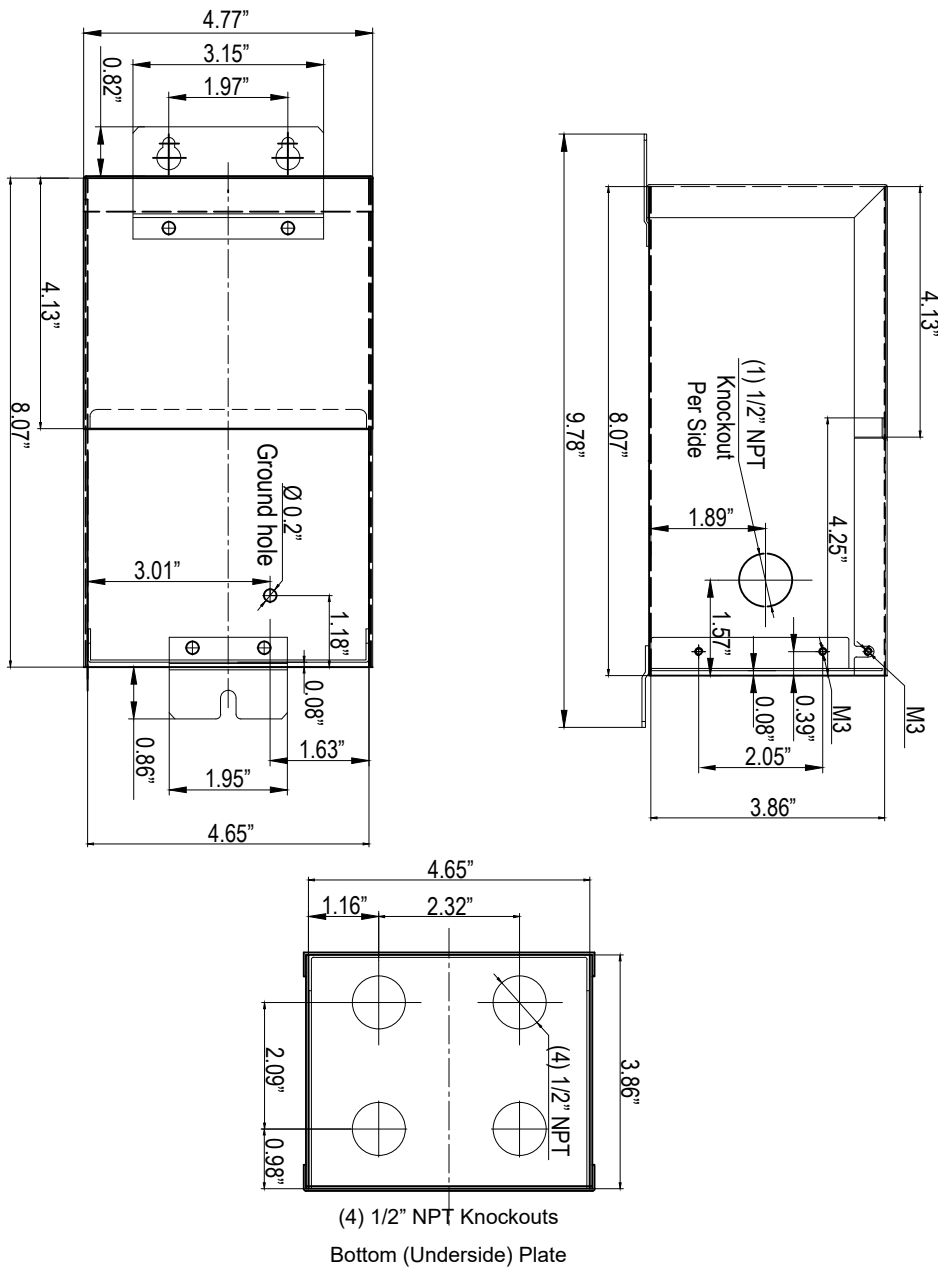

Connection Guide

1. Connect **X4** and **X3** together
2. Connect **X2** and **X1** together
3. Connect High Voltage **L1** to **X4**, **X3**
4. Connect Low Voltage **L1** to **X1**, **X2**, **H4**
5. Connect **H3** and **H2** together
6. Connect High & Low Voltage **L2** to **H1**

DIAGRAM C2

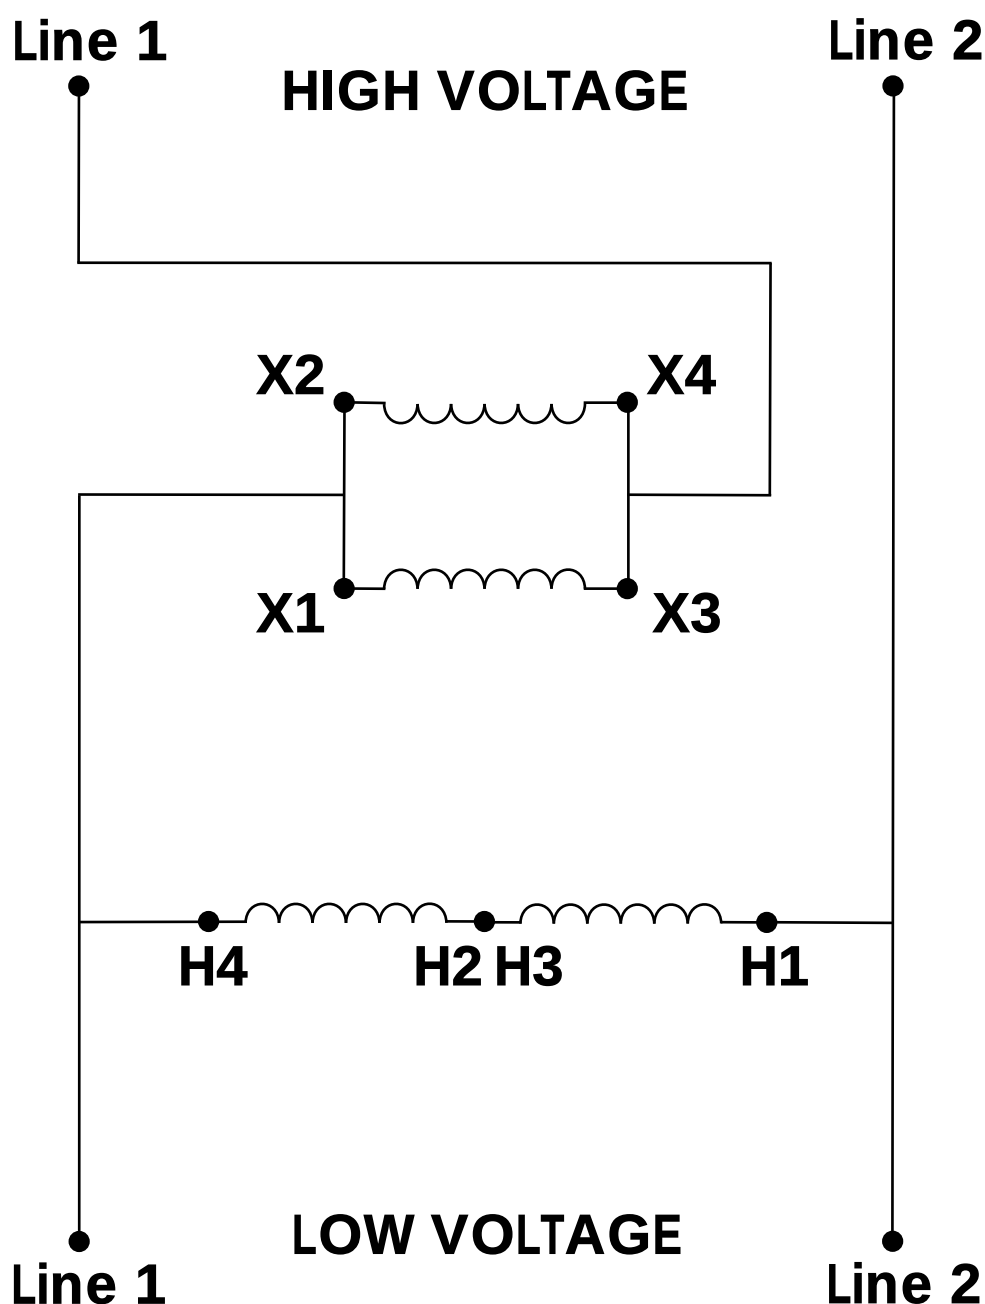



XFMRDIRECT

Part # — TX-BB-195V-208V-5A

Buck-Boost Transformer Specification Sheet

Available at XFMR Direct

Page 4 of 9



TX-BB-195V-208V-5A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) $\frac{3}{4}$ " NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core