

Summary

Single-phase buck-boost transformer. Steps up 208V to 240V at 80 amps continuous output. 19.2 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 208V building supply to 240V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 240V that is installed on a 208V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 80-amp buck-boost transformer is significantly smaller and lighter than a 80-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-208V-240V-80A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	19.2 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	208V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	92.30A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	240V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	80A	Winding Material	Aluminum
Maximum Primary OCP	125A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	60 lbs
Temperature Rise	115°C	Dimensions	7.68"-W x 6.38"-D x 12.2"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Front View, Side View, and Top View.

Front View Dimensions:

- Overall Width: 12.21"
- Overall Height: 8.27"
- Top Flange Width: 6.58"
- Top Flange Thickness: 1.26"
- Top Flange Spacing: 1.14" (between knockouts), 2.95" (between knockout groups), 1.14" (from edge to knockout group)
- Ground Hole: $\varnothing 0.2"$
- Ground Hole Position: 1.18" from right edge, 1.18" from bottom edge
- Mounting Bracket: 1.95" wide, 0.86" high, 7.68" from left edge

Side View Dimensions:

- Overall Height: 14.36"
- Plate Thickness: 0.79"
- Knockout Diameter: (1) 3/4" NPT Knockout Per Side
- Knockout Position: 1.67" from left edge, 1.57" from bottom edge
- Bottom Flange: 4.25" wide, 1.38" high, 6.38" from left edge
- Bottom Flange Thickness: 0.08"
- Bottom Flange Spacing: 0.08" (between knockouts), 0.89" (between knockout and edge), 1.38" (from edge to knockout)


Top View Dimensions:

- Overall Width: 7.68"
- Overall Height: 6.38"
- Knockout Diameter: (4) 3/4" NPT Knockouts
- Knockout Position: 1.16" from left edge, 5.35" from left edge, 0.95" from top edge, 4.41" from top edge

Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

DIAGRAM D2

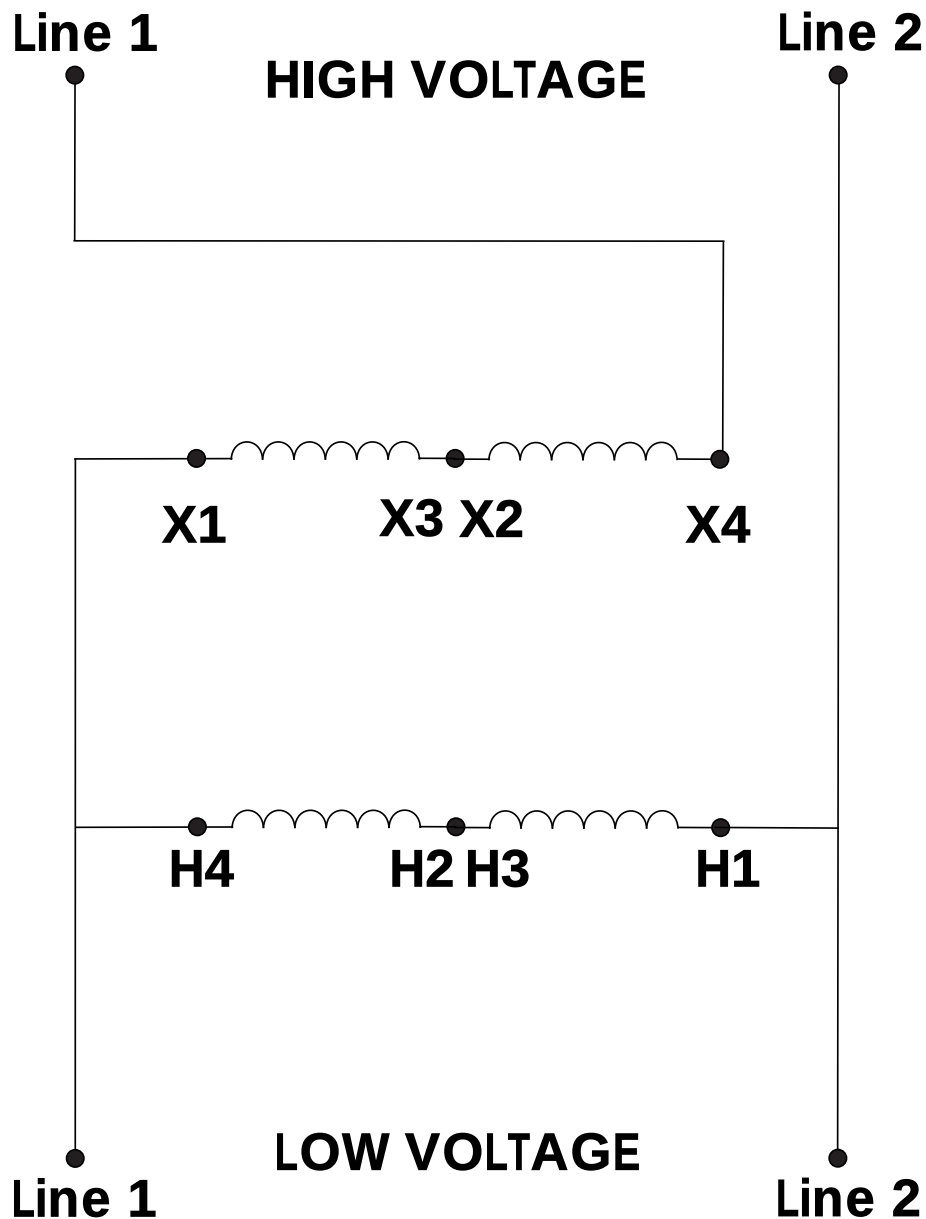



TX-BB-208V-240V-80A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core