

## Summary

Single-phase buck-boost transformer. Steps up 200V to 230V at 10.87 amps continuous output. 2.5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

## Product Description

This unit corrects a 200V building supply to 230V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 230V that is installed on a 200V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 10.87-amp buck-boost transformer is significantly smaller and lighter than a 10.87-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-200V-230V-2.5KVA — NEMA 3R Encapsulated, cETLus Listed

## Specifications

|                     |                         |                       |                              |
|---------------------|-------------------------|-----------------------|------------------------------|
| Phase               | Single Phase (1-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 2.5 kVA                 | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 200V                    | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 12.50A                  | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 230V                    | Termination Access    | (6) 1/2" NPT Hubs            |
| Secondary Amperage  | 10.87A                  | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 15A                     | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                   | Weight                | 14 lbs                       |
| Temperature Rise    | 115°C                   | Dimensions            | 4.65 x 3.86 x 9.25           |

## Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



## Common Applications


- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



**XFMR Direct, the source for all your Transformer needs**

**sales@xfmrdirect.com**

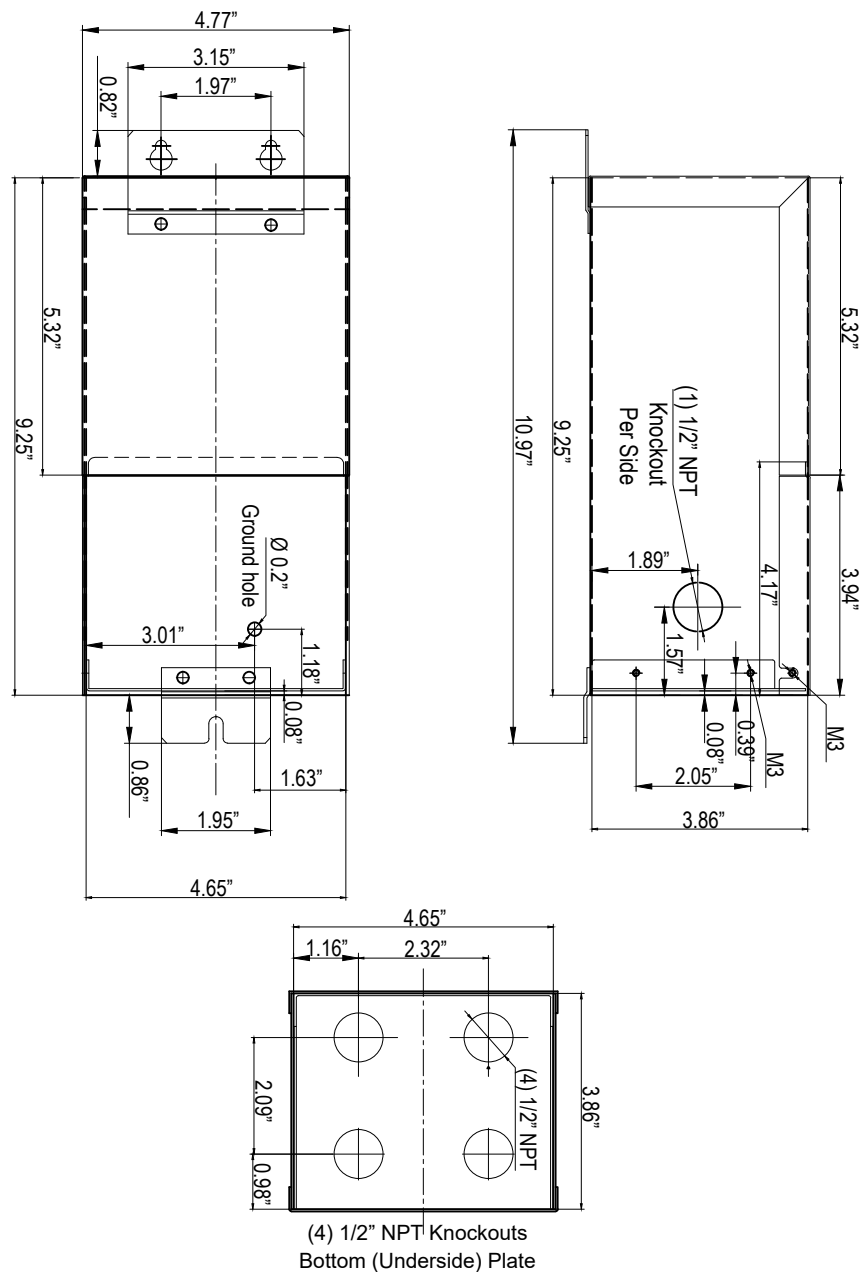

## Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

### DIAGRAM D2





## Part # — TX-BB-200V-230V-2.5KVA

## Buck-Boost Transformer Specification Sheet

Available at XFMR Direct

Page 4 of 9



*TX-BB-200V-230V-2.5KVA — NEMA 3R Encapsulated, cETLus Listed*



*Base Knockouts — (4) ¾" NPT*



Side View



*Rear View — Surface Mount Bracket*



Wiring Compartment — Terminal Leads



*Interior — Epoxy Resin Encapsulated Core*