

Summary

Three-phase delta buck-boost transformer. Steps down 220V to 200V at 20 amps continuous output. 6.928 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 220V three phase building supply to 200V delta at the point of use, permanently, without modifying the building's electrical service.

Designed for equipment rated 200V that is installed on a 220V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 20-amp buck-boost transformer is significantly smaller and lighter than a 20-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-220D-200D-20A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	6.928 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	220V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	18.18A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	200V	Termination Access	(6) 1/2" NPT Hubs
Secondary Amperage	20A	Winding Material	Aluminum
Maximum Primary OCP	25A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	34 lbs
Temperature Rise	115°C	Dimensions	10.3 x 3.86 x 9.25

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Part # — TX-BB-220D-200D-20A


Buck-Boost Transformer Specification Sheet

Available at XFMR Direct

Page 2 of 9

Dimensions

Three-phase open delta installation — (2) enclosures required. Drawing depicts one enclosure.

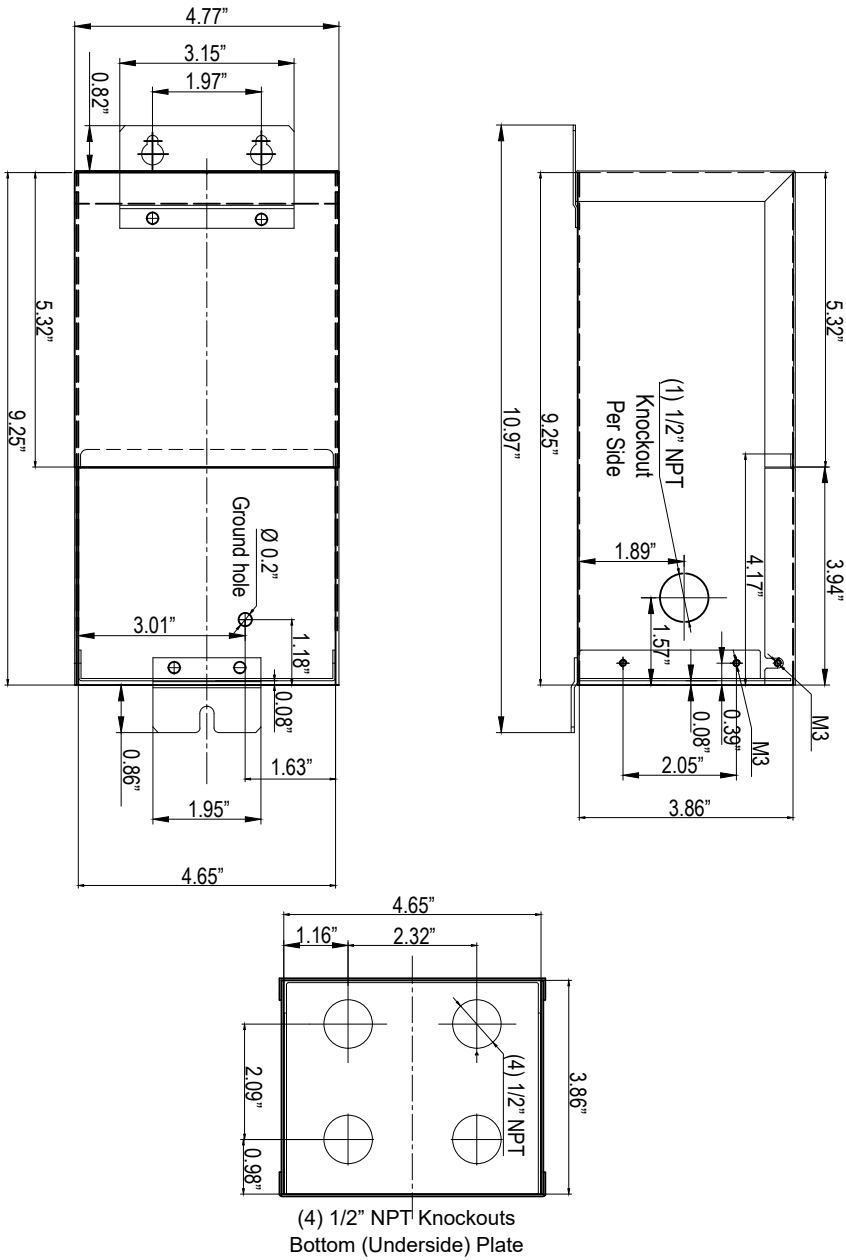


Connection Guide

1. Connect X2 and X3 together for each transformer
2. Connect High Voltage PHASE A to X4 on transformer A
3. Connect High Voltage PHASE C to X4 on transformer B
4. Connect Low Voltage PHASE A to X1, H4, H3 on transformer A
5. Connect Low Voltage PHASE C to X1, H4, H3 on transformer B
6. Connect High & Low Voltage PHASE B to H1 and H2
7. Bridge H1 and H2 connections between Transformers A & B

DIAGRAM F2

HIGH VOLTAGE

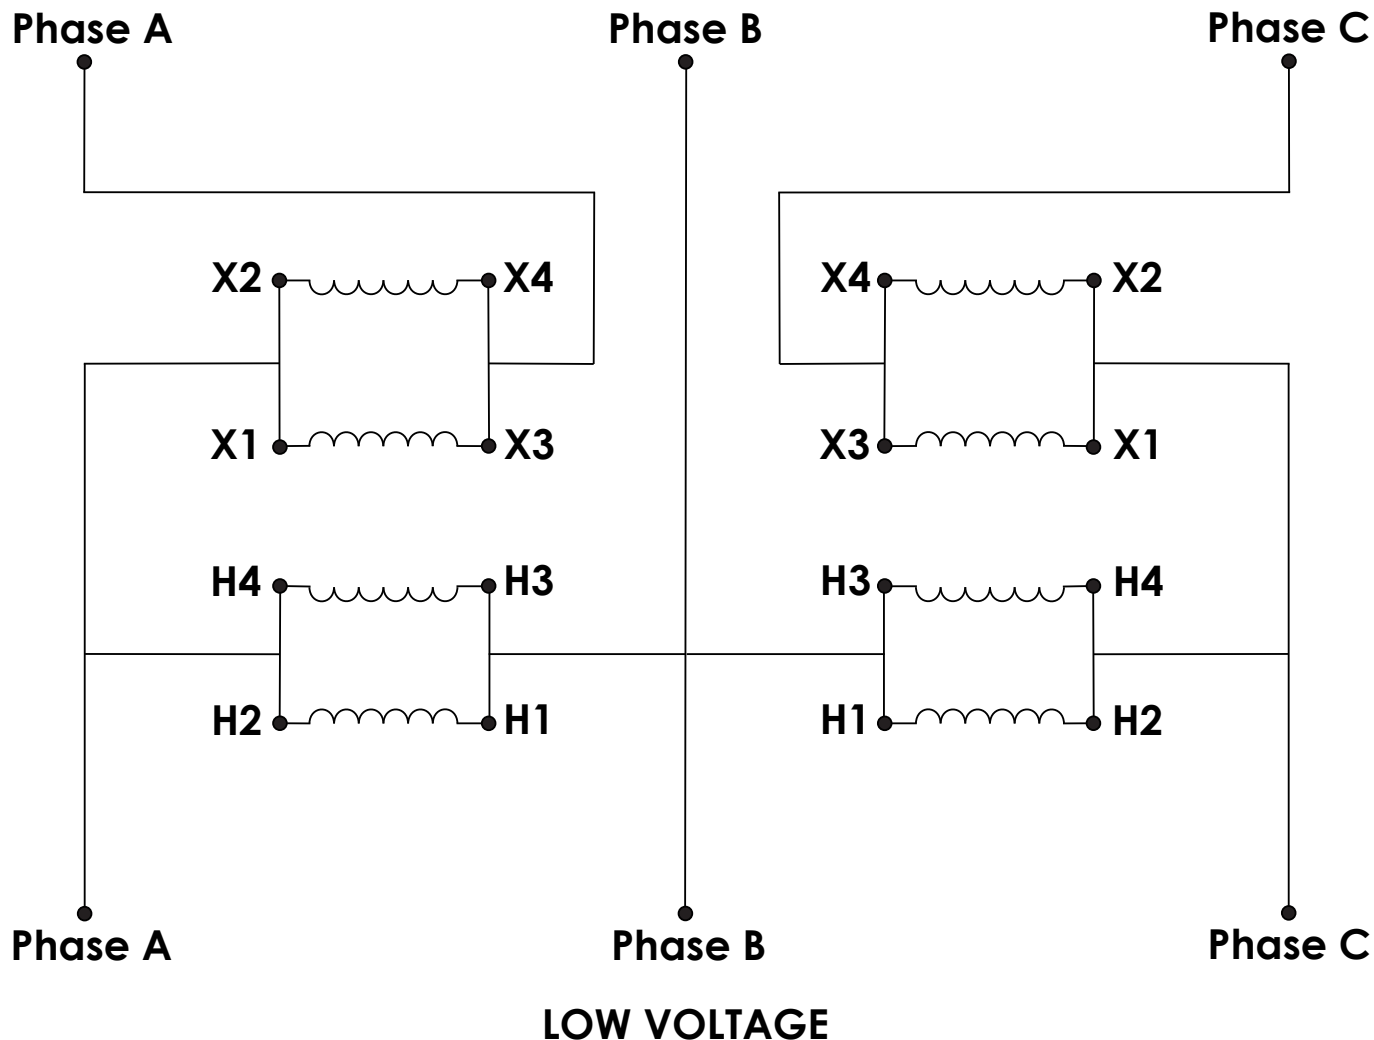



TX-BB-220D-200D-20A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) $\frac{3}{4}$ " NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core