

Summary

Three-phase delta buck-boost transformer. Steps down 220V to 200V at 45.8 amps continuous output. 15.87 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 220V three phase building supply to 200V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 200V that is installed on a 220V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 45.8-amp buck-boost transformer is significantly smaller and lighter than a 45.8-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-220D-200D-46A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	15.87 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	220V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	41.60A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	200V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	45.8A	Winding Material	Aluminum
Maximum Primary OCP	60A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	54 lbs
Temperature Rise	115°C	Dimensions	11.11"-W x 4.49"-D x 10.08"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required.




Connection Guide

1. Connect X2 and X3 together for each transformer
2. Connect High Voltage PHASE A to X4 on transformer A
3. Connect High Voltage PHASE C to X4 on transformer B
4. Connect Low Voltage PHASE A to X1, H4, H3 on transformer A
5. Connect Low Voltage PHASE C to X1, H4, H3 on transformer B
6. Connect High & Low Voltage PHASE B to H1 and H2
7. Bridge H1 and H2 connections between Transformers A & B

DIAGRAM F2

HIGH VOLTAGE

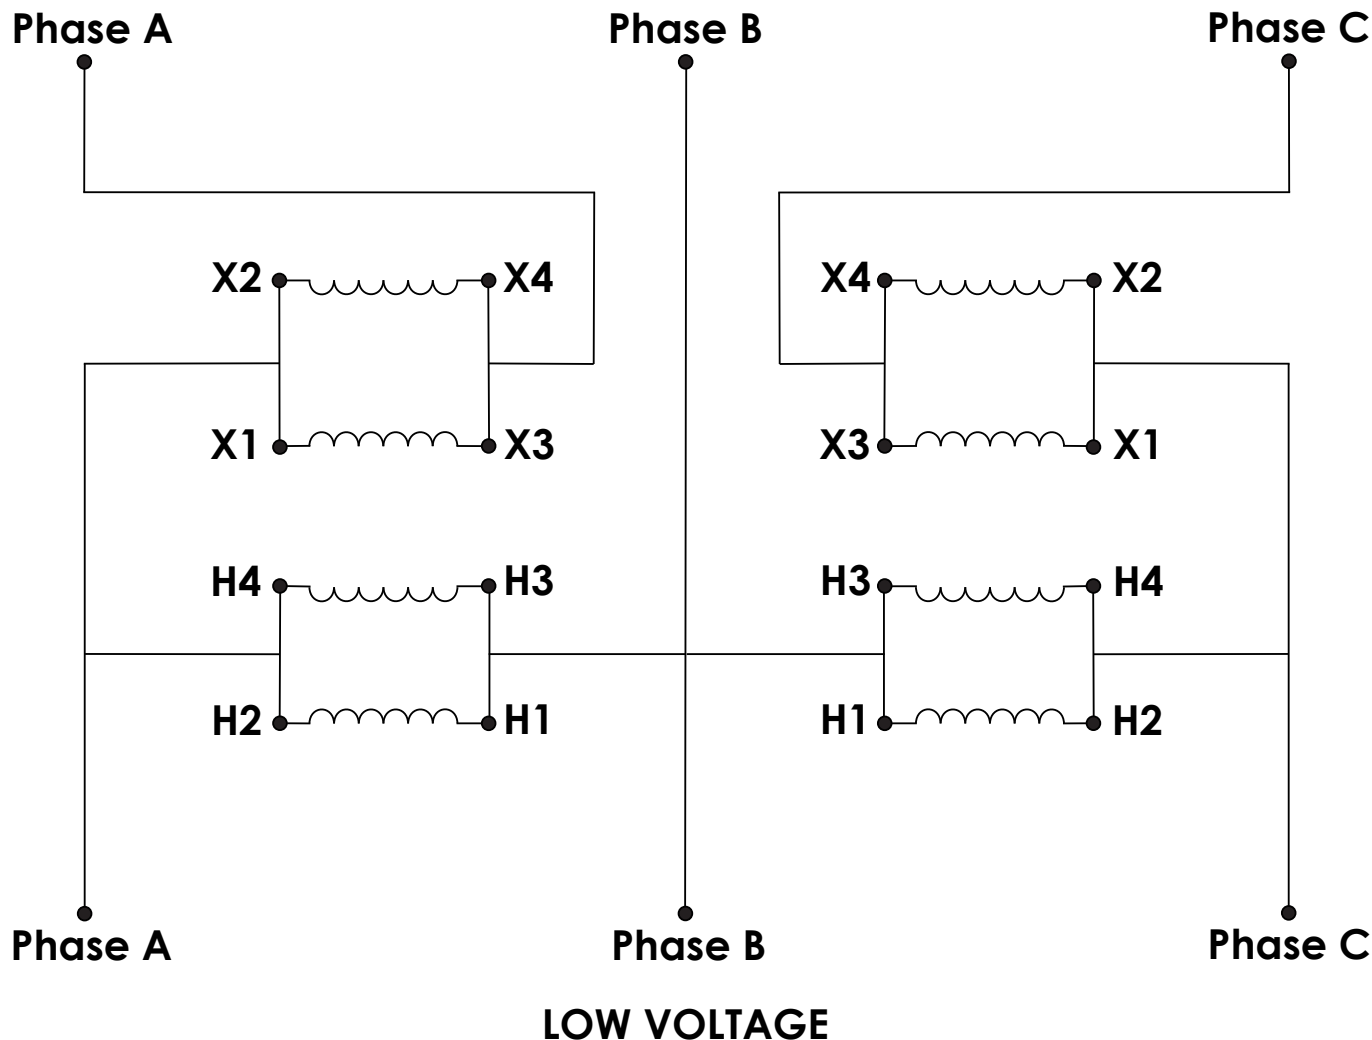



sales@sanzosales.com

The image shows two identical large, grey, rectangular autotransformers from Sanzo Sales. Each unit features a lifting eye at the top and a detailed technical label. The label for the unit on the left specifies a model of TX-BB-220D-200D-45.8A, while the unit on the right specifies TX-BB-220D-200D-45.8A. Both labels include technical specifications for input/output voltages, power, and safety warnings, along with a CE mark and a warning symbol.

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core