

Summary

Three-phase wye buck-boost transformer. Steps down 132V to 120V at 22.9 amps continuous output. 8.25 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 132V three phase building supply to 120V wye at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 120V that is installed on a 132V system experiencing overvoltage from the utility.

Configured as a wye autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 22.9-amp buck-boost transformer is significantly smaller and lighter than a 22.9-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-229Y-208Y.120-23A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Wye (3-PH), AC	Transformer Type	Buck/Boost
Capacity	8.25 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	132V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	20.80A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	120V	Termination Access	(6) 1/2" NPT Hubs
Secondary Amperage	22.9A	Winding Material	Aluminum
Maximum Primary OCP	25A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	36 lbs
Temperature Rise	115°C	Dimensions	4.65 x 3.86 x 8.07

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Three-phase wye installation — (3) enclosures required.




Connection Guide

1. Connect **X2** and **X3** together for each transformer
2. Connect High Voltage **PHASE A** to **X4** on transformer 1
3. Connect High Voltage **PHASE B** to **X4** on transformer 2
4. Connect High Voltage **PHASE C** to **X4** on transformer 3
5. Connect Low Voltage **PHASE A** to **X1**, **H4**, **H3** on transformer 1
6. Connect Low Voltage **PHASE B** to **X1**, **H4**, **H3** on transformer 2
7. Connect Low Voltage **PHASE C** to **X1**, **H4**, **H3** on transformer 3
8. Connect **NEUTRAL** to **H1** and **H2**
9. Bridge **H1** connections between ALL transformers

DIAGRAM I2

HIGH VOLTAGE

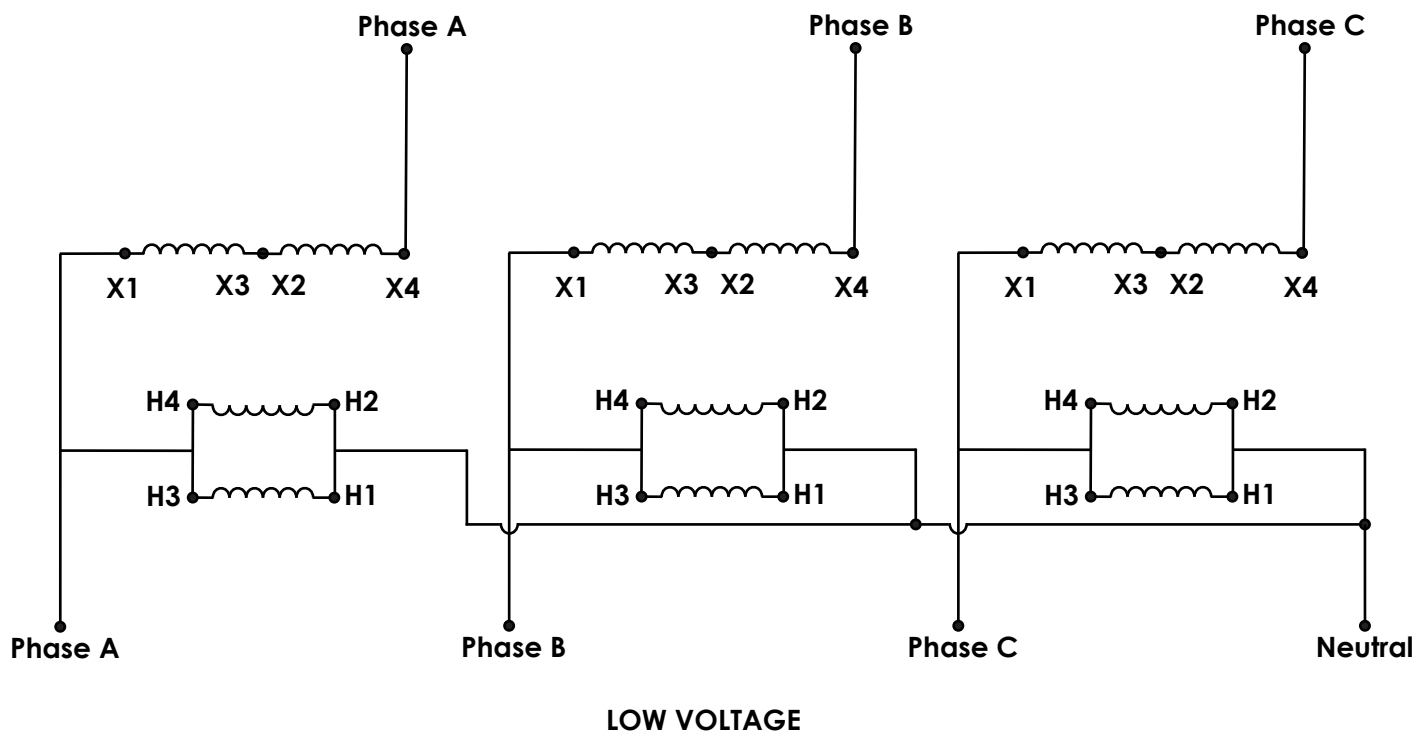



sales@sanzosales.com

The image displays three identical grey metal autotransformers from Sanzo Sales, arranged in a row. Each unit is a rectangular box with a hinged top and a hanging loop at the top center. The front panel of each unit features a white label with technical specifications and a logo. The label includes the Sanzo Sales logo, the model number TX-BB-208Y-220Y-21A, and a table of electrical ratings. The units are designed for industrial or commercial use, providing a 208V/220V autotransformer function.

Label Information:

SANZO SALES

TX-BB-208Y-220Y-21A

Phase	Single Phase	Configuration	Construction
Input Voltage	208V	4/0	4/0
Output Voltage	220V	4/0	4/0
Rated Amps	100A	100A	100A
Max Input Amps	100A	100A	100A
Max Output Amps	100A	100A	100A

Autotransformer

Complies with UL 1000-1

UL 1000-1

UL 1000-1

sales@sanzosales.com



Base Knockouts — (4) $\frac{3}{4}$ " NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core