

Summary

Three-phase delta buck-boost transformer. Steps down 240V to 200V at 62.5 amps continuous output. 21.651 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 240V three phase building supply to 200V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 200V that is installed on a 240V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 62.5-amp buck-boost transformer is significantly smaller and lighter than a 62.5-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-240D-200D-62.5A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	21.651 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	240V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	52.08A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	200V	Termination Access	(6) 3/4" NPT Hubs
Secondary Amperage	62.5A	Winding Material	Aluminum
Maximum Primary OCP	70A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	104 lbs
Temperature Rise	115°C	Dimensions	16.36 x 6.38 x 12.2

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required. Drawing depicts one enclosure.

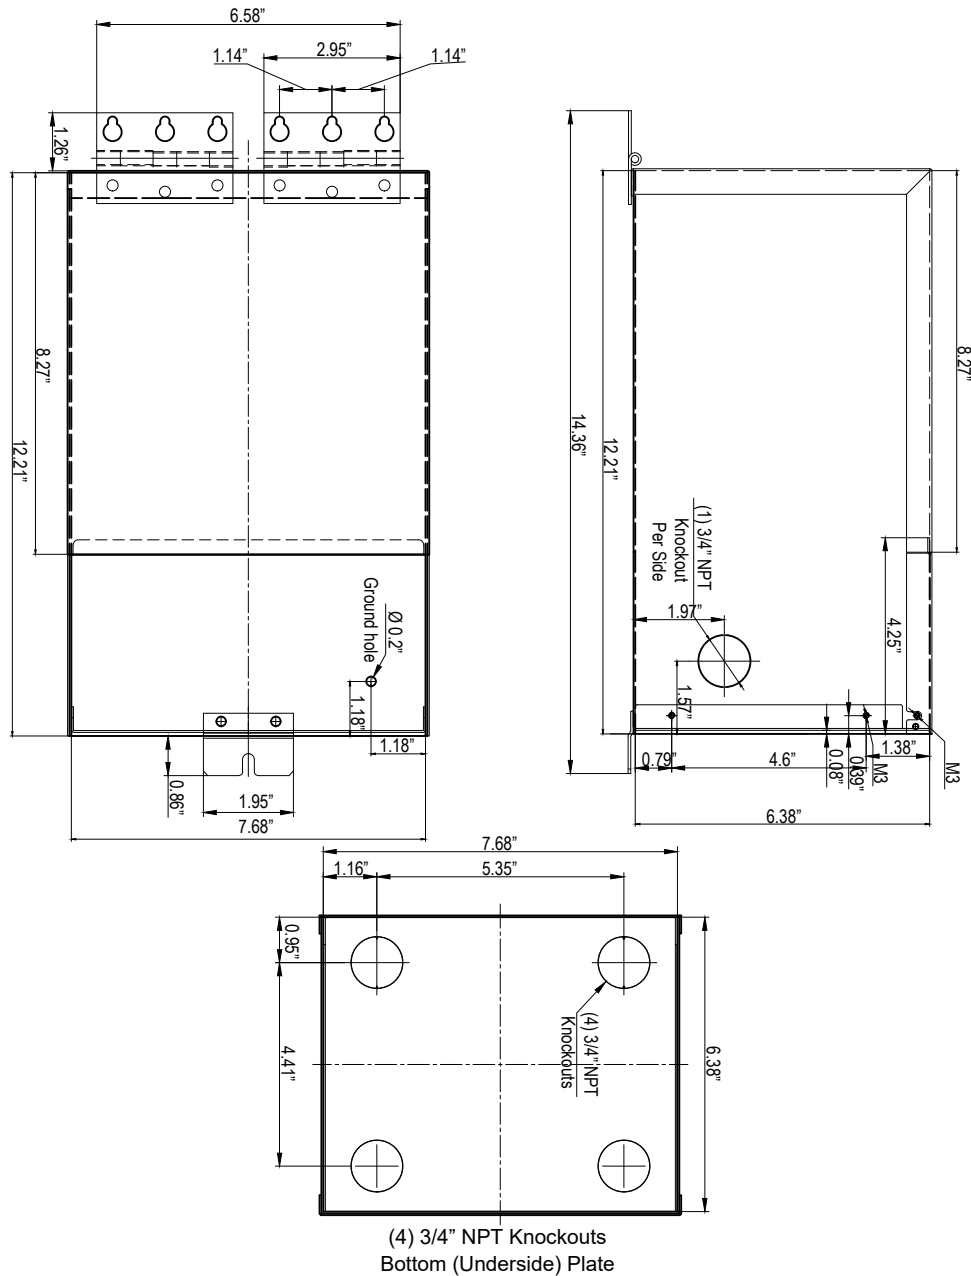


Connection Guide

1. Connect **X2** and **X3** together for each transformer
2. Connect High Voltage **PHASE A** to **X4** on transformer A
3. Connect High Voltage **PHASE C** to **X4** on transformer B
4. Connect Low Voltage **PHASE A** to **X1**, **H4**, **H3** on transformer A
5. Connect Low Voltage **PHASE C** to **X1**, **H4**, **H3** on transformer B
6. Connect High & Low Voltage **PHASE B** to **H1** and **H2**
7. Bridge **H1** and **H2** connections between Transformer A & B

DIAGRAM E2

HIGH VOLTAGE

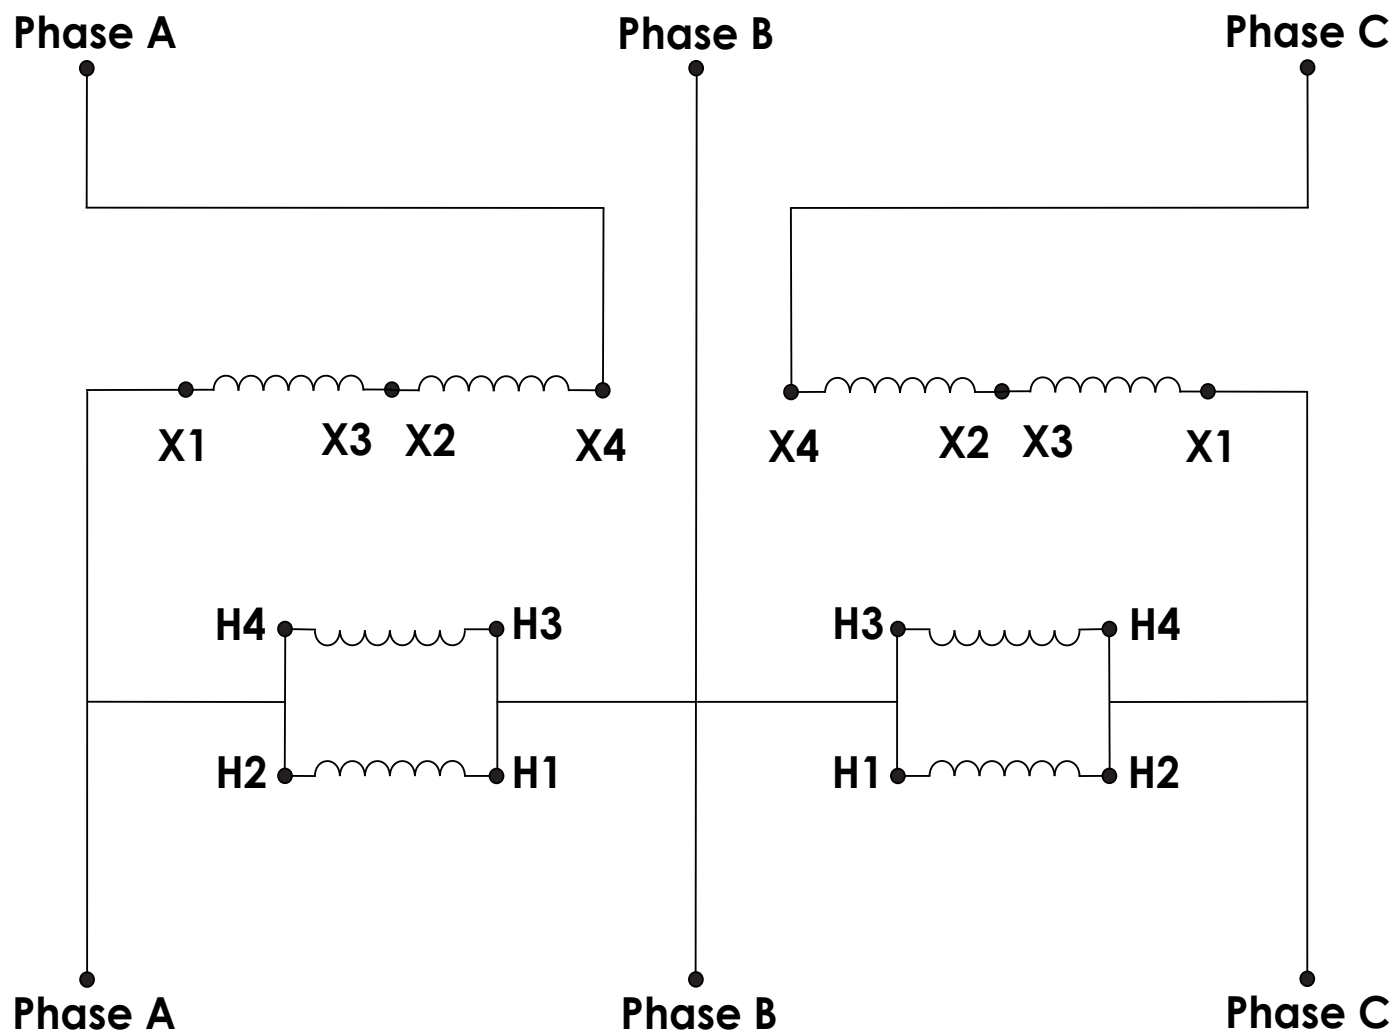

LOW VOLTAGE



TX-BB-240D-200D-62.5A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) $\frac{3}{4}$ " NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core