

Summary

Three-phase delta buck-boost transformer. Steps down 240V to 208V at 40 amps continuous output. 14.41 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 240V three phase building supply to 208V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 208V that is installed on a 240V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 40-amp buck-boost transformer is significantly smaller and lighter than a 40-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-240D-208D-40A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	14.41 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	240V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	34.67A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	208V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	40A	Winding Material	Aluminum
Maximum Primary OCP	50A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	68 lbs
Temperature Rise	115°C	Dimensions	14.25"-W x 6.5"-D x 11.75"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required.

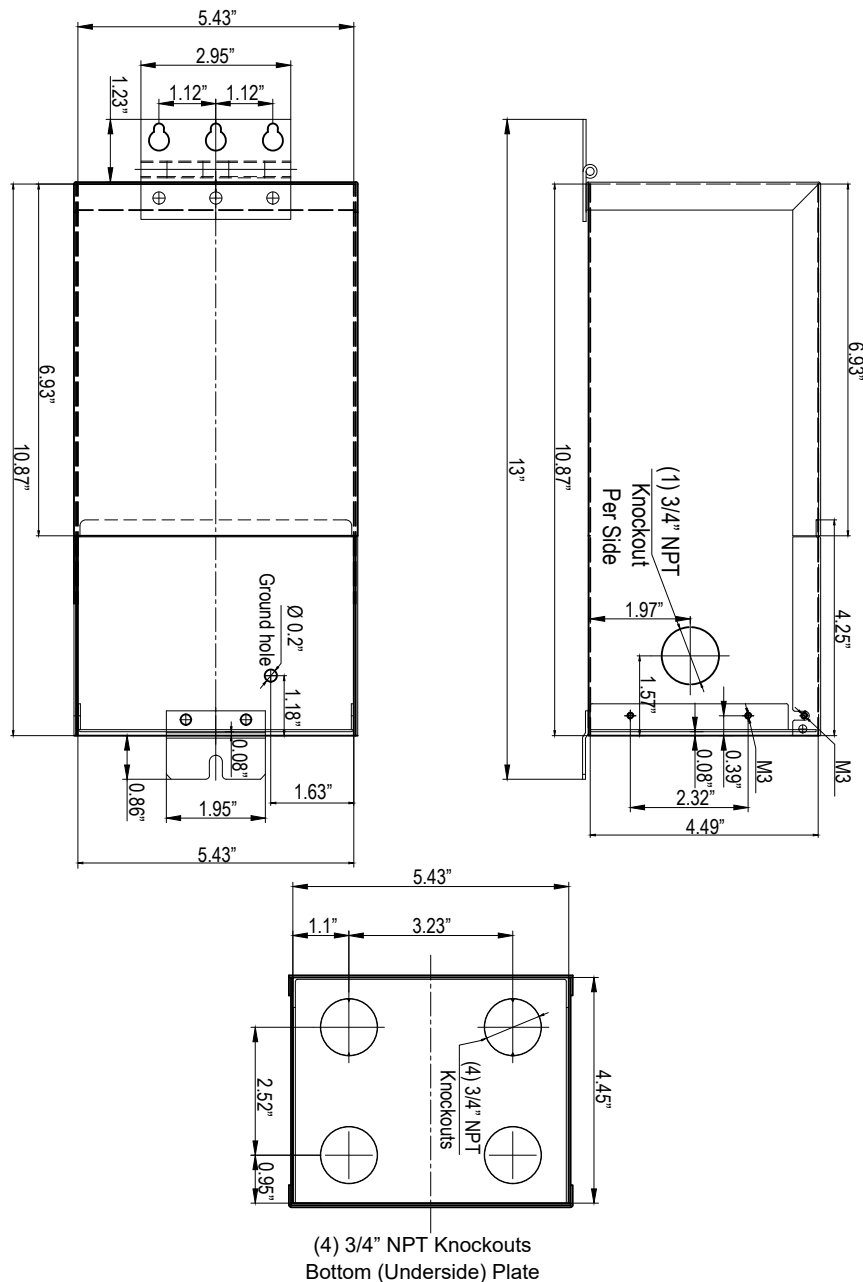


Connection Guide

1. Connect **X2** and **X3** together for both transformers
2. Connect **H2** and **H3** together for both transformers
3. Connect High Voltage **PHASE A** to **X4** on transformer A
4. Connect High Voltage **PHASE C** to **X4** on transformer B
5. Connect Low Voltage **PHASE A** to **H4** and **X1** on transformer A
6. Connect Low Voltage **PHASE C** to **H4** and **X1** on transformer B
7. Connect High & Low Voltage **PHASE B** to **H1**
8. Bridge **H1** connections between transformer A & B

DIAGRAM G2

HIGH VOLTAGE

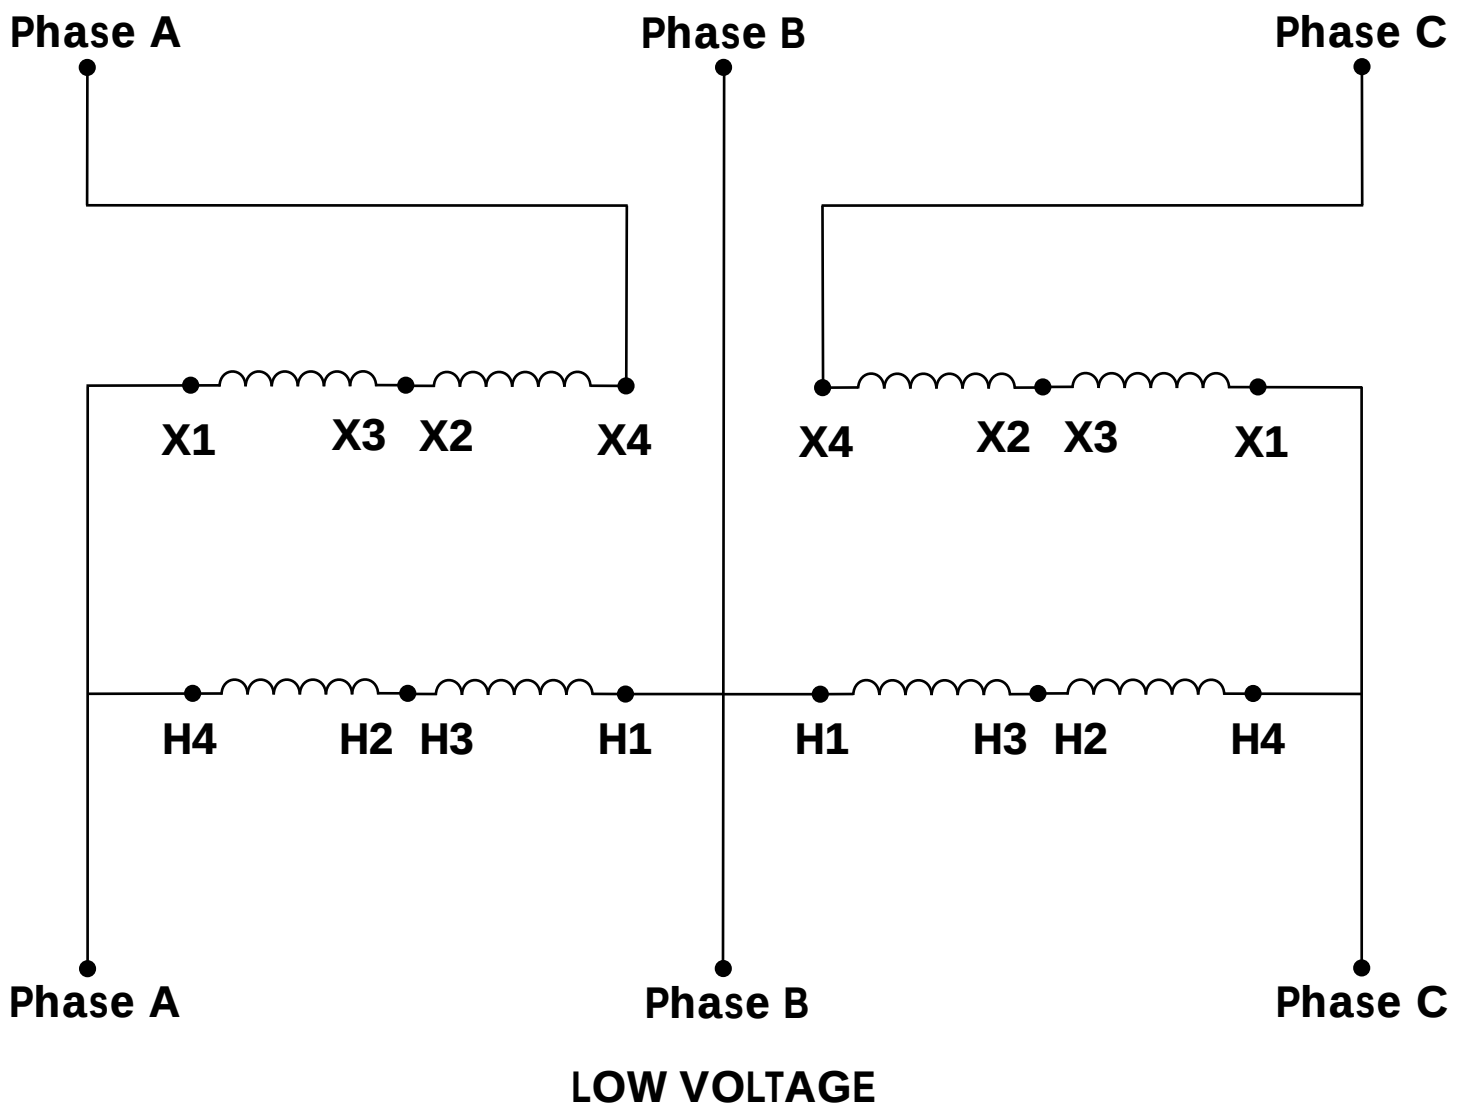



sales@sanzosales.com

The image shows two identical grey metal autotransformers from Sanzo Sales. Each unit is rectangular with a mounting bracket on top and a label on the front. The label for the unit on the left reads:

SANZO SALES
TX-BB-240D-208D-40A

Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	208V	Max. VA:	40A
Output Voltage:	240V	Temperature:	40°C
Isolation Voltage:	750V RMS	Insulation:	100% PVC
Max Input Amps:	24.0A	Surge Rate:	100% / 100%
Max Output Amps:	24.0A	Warranty:	5 Years

Endurance: 100,000 Hrs. for Indoor or Outdoor Use
 Conforms to UL 508 Conforms to IEC 60076-1
 Size: 4 1/2" x 10 1/2" x 10 1/2" 100 lbs. (45 kg)

Autotransformer

ETL
 LISTED
 100,000 HRS. for 100% / 100%
 LISTED TO UL 508-1

The unit on the right has a similar label, but the output voltage is 208V and the max input/output amps are 20.0A.

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core