



Electrical and physical specifications

Supply configuration	3-Phase Delta
Input voltage	240 V
Nominal output voltage	252 V
Calculated output at stated input	252.00 V
Rated continuous output current	56.97 A
Approx. input current at rated load	59.819 A
Capacity at calculated output	24.86 kVA
Connection diagram	H2
Base transformer part	TX-B2-075H-124202
Number of base transformers	2
Rating of each base	750 VA
Base primary / secondary windings	120/240 V / 12/24 V
Dimensions per enclosure (W x D x H)	5.43 x 4.49 x 10.08 in
Weight per enclosure	22 lb
Total base-transformer weight	44 lb
Winding / enclosure	Aluminum / NEMA 3R
Rated frequency	50/60 Hz

Installation and rating notes

Use the connection sheet with this exact base construction. Do not select wiring by voltage alone.

Nominal output is an application label. Actual output varies with supply voltage and load.

The current limit shown above governs; the ordering SKU is retained for traceability.

Confirm equipment current, motor starting requirements and duty before installation.

Autotransformer connections provide no electrical isolation and do not create a neutral.

Installation must be performed by qualified personnel. Disconnect and verify absence of power.

Diagram H2 | 240 V input to 252 V nominal output


Three phase delta | Primary series / secondary parallel | Boost

Continuous output rating: 56.97 A | Calculated output: 252.00 V

1. Join X4 and X3 on each unit.
2. Join X2 and X1 on each unit.
3. Connect 252 V OUTPUT A to X4 and X3 on Unit 1.
4. Connect 252 V OUTPUT C to X4 and X3 on Unit 2.
5. Connect 240 V INPUT A to X1 and H4 and X2 on Unit 1.
6. Connect 240 V INPUT C to X1 and H4 and X2 on Unit 2.
7. Join H2 and H3 on each unit.
8. Connect INPUT and OUTPUT B to H1 on Unit 1.
9. Bridge B connections between all units.

BASE: 2 x TX-B2-075H-124202 | 750 VA each

Use this diagram only with 120/240 V primary / 12/24 V secondary.

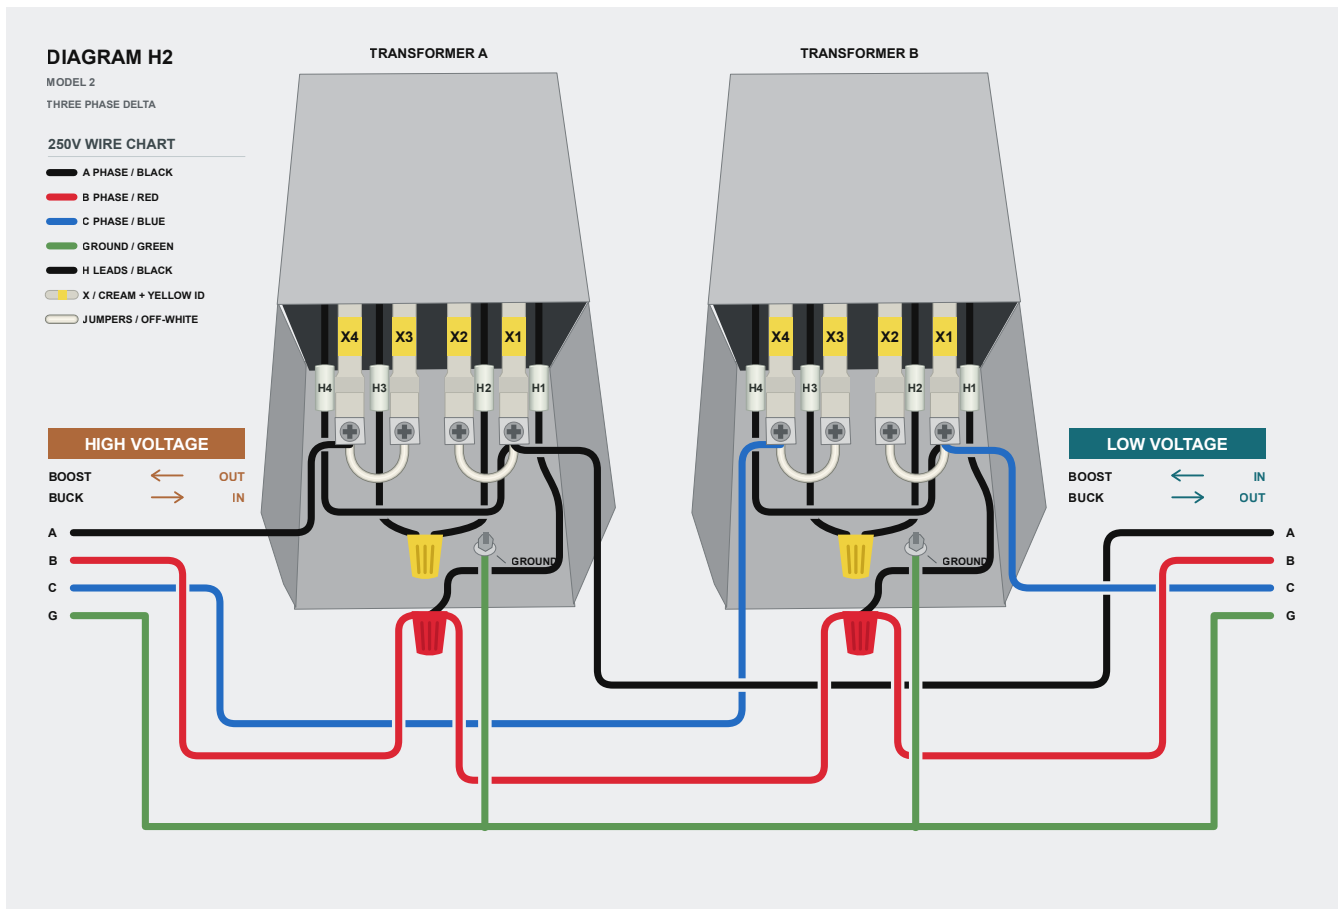

Drawing: LOW VOLTAGE = 240 V INPUT; HIGH VOLTAGE = 252 V OUTPUT.

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.