

Summary

Three-phase wye buck-boost transformer. Steps down 442V to 415V at 60 amps continuous output. 43.13 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 442V three phase building supply to 415V wye at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 415V that is installed on a 442V system experiencing overvoltage from the utility.

Configured as a wye autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 60-amp buck-boost transformer is significantly smaller and lighter than a 60-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-442Y-415Y.240-60A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Wye (3-PH), AC	Transformer Type	Buck/Boost
Capacity	43.13 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	442V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	56.30A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	415V	Termination Access	(6) 3/4" NPT Hubs
Secondary Amperage	60A	Winding Material	Aluminum
Maximum Primary OCP	70A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	81 lbs
Temperature Rise	115°C	Dimensions	5.43 x 4.49 x 10.08

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Three-phase wye installation — (3) enclosures required.




Connection Guide

1. Connect **X2** and **X3** together for each transformer
2. Connect High Voltage **PHASE A** to **X4** on transformer 1
3. Connect High Voltage **PHASE B** to **X4** on transformer 2
4. Connect High Voltage **PHASE C** to **X4** on transformer 3
5. Connect Low Voltage **PHASE A** to **X1**, **H4**, **H3** on transformer 1
6. Connect Low Voltage **PHASE B** to **X1**, **H4**, **H3** on transformer 2
7. Connect Low Voltage **PHASE C** to **X1**, **H4**, **H3** on transformer 3
8. Connect **NEUTRAL** to **H1** and **H2**
9. Bridge **H1** connections between ALL transformers

DIAGRAM I2

HIGH VOLTAGE

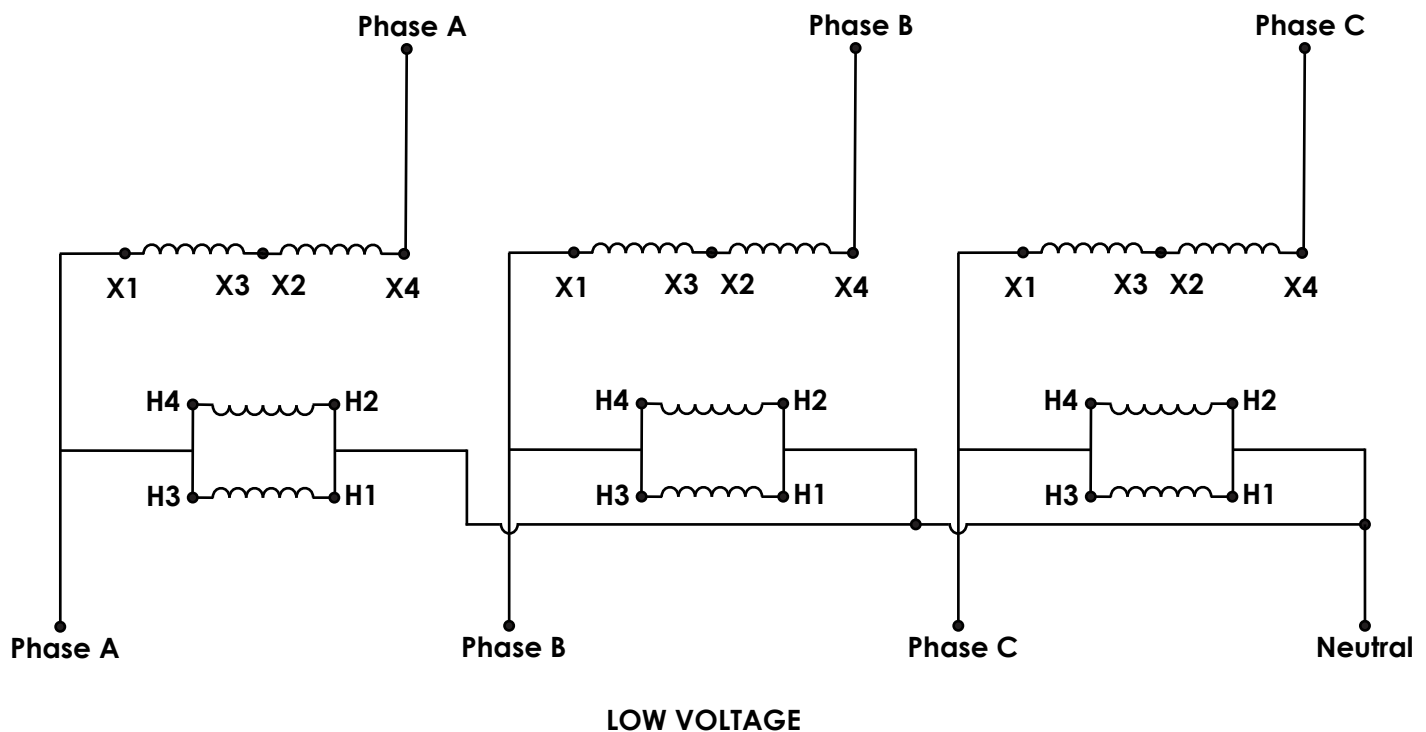



sales@sanzosales.com

The image shows three identical grey metal autotransformers standing side-by-side. Each unit has a top-mounted terminal block with three screw terminals. The front of each unit features a white label with the Sanzo Sales logo and technical specifications. The label for the middle unit is clearly legible and includes the following information:

SANZO SALES
TX-BB-208Y-240Y-40A

Phase	Single Phase	Configuration	Apparent Power
Input Voltage	208Y	4:1	400 VA
Output Voltage	240Y	3:1	400 VA
Rated Current	10 A	400 VA	400 VA
Max Input Range	208V	400 VA	400 VA
Max Output Range	240V	400 VA	400 VA

Autotransformer

Sanzo Sales, Inc. 1000 N. 10th St. Suite 100
 Milwaukee, WI 53233-1000
 Tel: 414-224-1000 Fax: 414-224-1001
 Email: info@sanzo.com

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core