

Summary

Three-phase delta buck-boost transformer. Steps up 472V to 496V at 5.82 amps continuous output. 5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 472V three phase building supply to 496V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 496V that is installed on a 472V system experiencing undervoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 5.82-amp buck-boost transformer is significantly smaller and lighter than a 5.82-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-472D-496D-5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	472V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	6.12A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	496V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	5.82A	Winding Material	Aluminum
Maximum Primary OCP	15A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	18 lbs
Temperature Rise	115°C	Dimensions	7.75"-W x 5.25"-D x 7.25"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required.

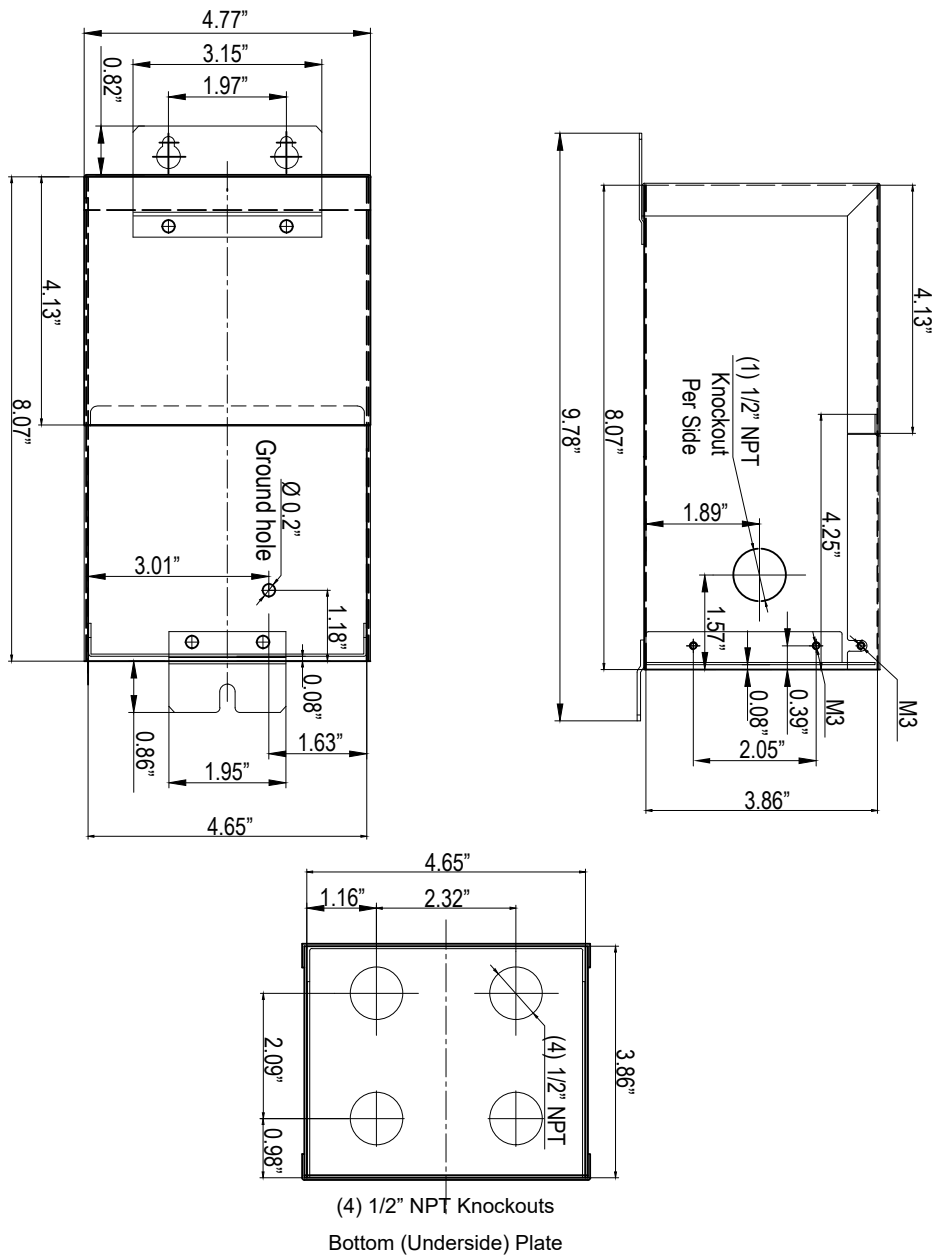


Connection Guide


1. Connect **X2** and **X3** together for both transformers
2. Connect **H2** and **H3** together for both transformers
3. Connect High Voltage **PHASE A** to **X4** on transformer A
4. Connect High Voltage **PHASE C** to **X4** on transformer B
5. Connect Low Voltage **PHASE A** to **H4** and **X1** on transformer A
6. Connect Low Voltage **PHASE C** to **H4** and **X1** on transformer B
7. Connect High & Low Voltage **PHASE B** to **H1**
8. Bridge **H1** connections between transformer A & B

DIAGRAM G2

HIGH VOLTAGE

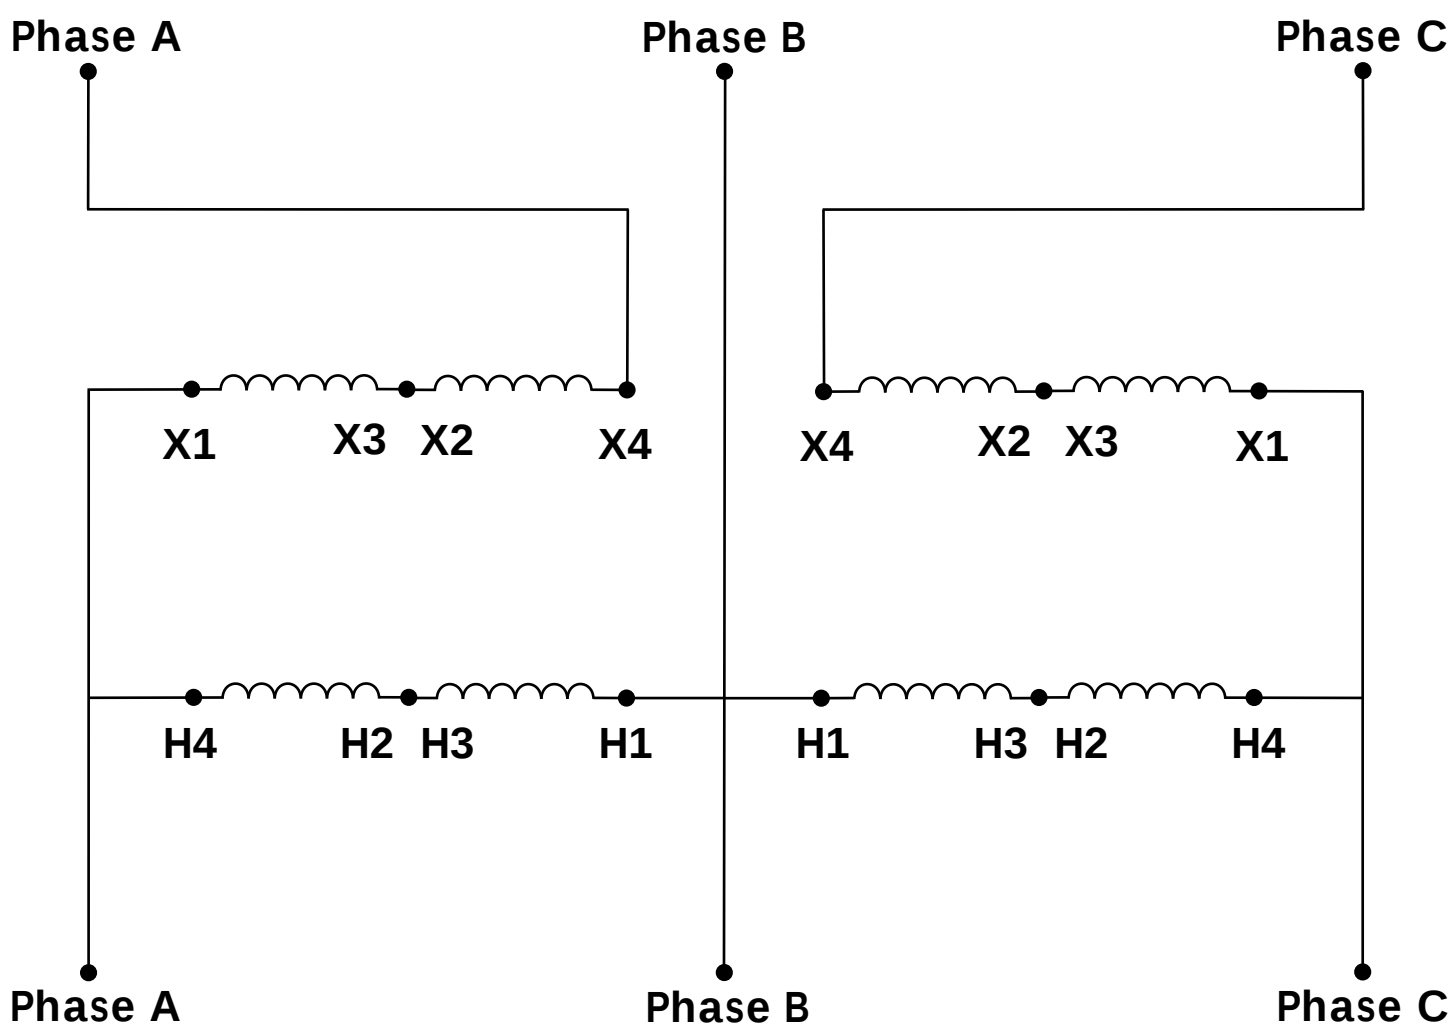

LOW VOLTAGE



sales@sanzosales.com

The image shows two identical Sanzo Sales autotransformers. Each unit is a grey metal cabinet with a label on the front. The label features the Sanzo Sales logo, the model number TX-BB-208D-230D-6.25A, and a table of technical specifications. The units are shown from a slightly angled perspective, highlighting their three-dimensional shape and the mounting holes on top.

SANZO SALES			
TX-BB-208D-230D-6.25A			
Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	208V	Max BCP:	65A
Output Voltage:	230V	Frequency:	60/50 Hz
Altitude range:	0 to 4000	Insulation:	180°C
Max Input Amps:	25.00A	Temp Rise:	110°C
Max Output Amps:	25A	Windings:	Aluminum

Endurance Type MB-200-20 for Indoor or Outdoor Use
 Compliance to UL 508 Conformance to IEC 60076-1
 Shock & VIBRATION IEC 60076-1 IEC 60076-1

Autotransformer

CONFORMS TO UL 508, UL 508-1
 CONFORMS TO IEC 60076-1

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core