



## Electrical and physical specifications

|                                      |                        |
|--------------------------------------|------------------------|
| Supply configuration                 | 3-Phase Delta          |
| Input voltage                        | 496 V                  |
| Nominal output voltage               | 451 V                  |
| Calculated output at stated input    | 450.91 V               |
| Rated continuous output current      | 26.53 A                |
| Approx. input current at rated load  | 24.118 A               |
| Capacity at calculated output        | 20.71 kVA              |
| Connection diagram                   | G2                     |
| Base transformer part                | TX-B3-015K-115216      |
| Number of base transformers          | 2                      |
| Rating of each base                  | 1500 VA                |
| Base primary / secondary windings    | 240/480 V / 24/48 V    |
| Dimensions per enclosure (W x D x H) | 5.43 x 4.49 x 10.87 in |
| Weight per enclosure                 | 34 lb                  |
| Total base-transformer weight        | 68 lb                  |
| Winding / enclosure                  | Aluminum / NEMA 3R     |
| Rated frequency                      | 50/60 Hz               |

## Installation and rating notes

Use the connection sheet with this exact base construction. Do not select wiring by voltage alone.

Nominal output is an application label. Actual output varies with supply voltage and load.

The current limit shown above governs; the ordering SKU is retained for traceability.

Confirm equipment current, motor starting requirements and duty before installation.

Autotransformer connections provide no electrical isolation and do not create a neutral.

Installation must be performed by qualified personnel. Disconnect and verify absence of power.

## Diagram G2 | 496 V input to 451 V nominal output


Three phase delta | Primary series / secondary series | Buck

**Continuous output rating: 26.53 A | Calculated output: 450.91 V**

1. Join X2 and X3 on each unit.
2. Join H2 and H3 on each unit.
3. Connect 496 V INPUT A to X4 on Unit 1.
4. Connect 496 V INPUT C to X4 on Unit 2.
5. Connect 451 V OUTPUT A to X1 and H4 on Unit 1.
6. Connect 451 V OUTPUT C to X1 and H4 on Unit 2.
7. Connect INPUT and OUTPUT B to H1 on Unit 1.
8. Bridge B connections between all units.

**BASE: 2 x TX-B3-015K-115216 | 1500 VA each**

Use this diagram only with 240/480 V primary / 24/48 V secondary.

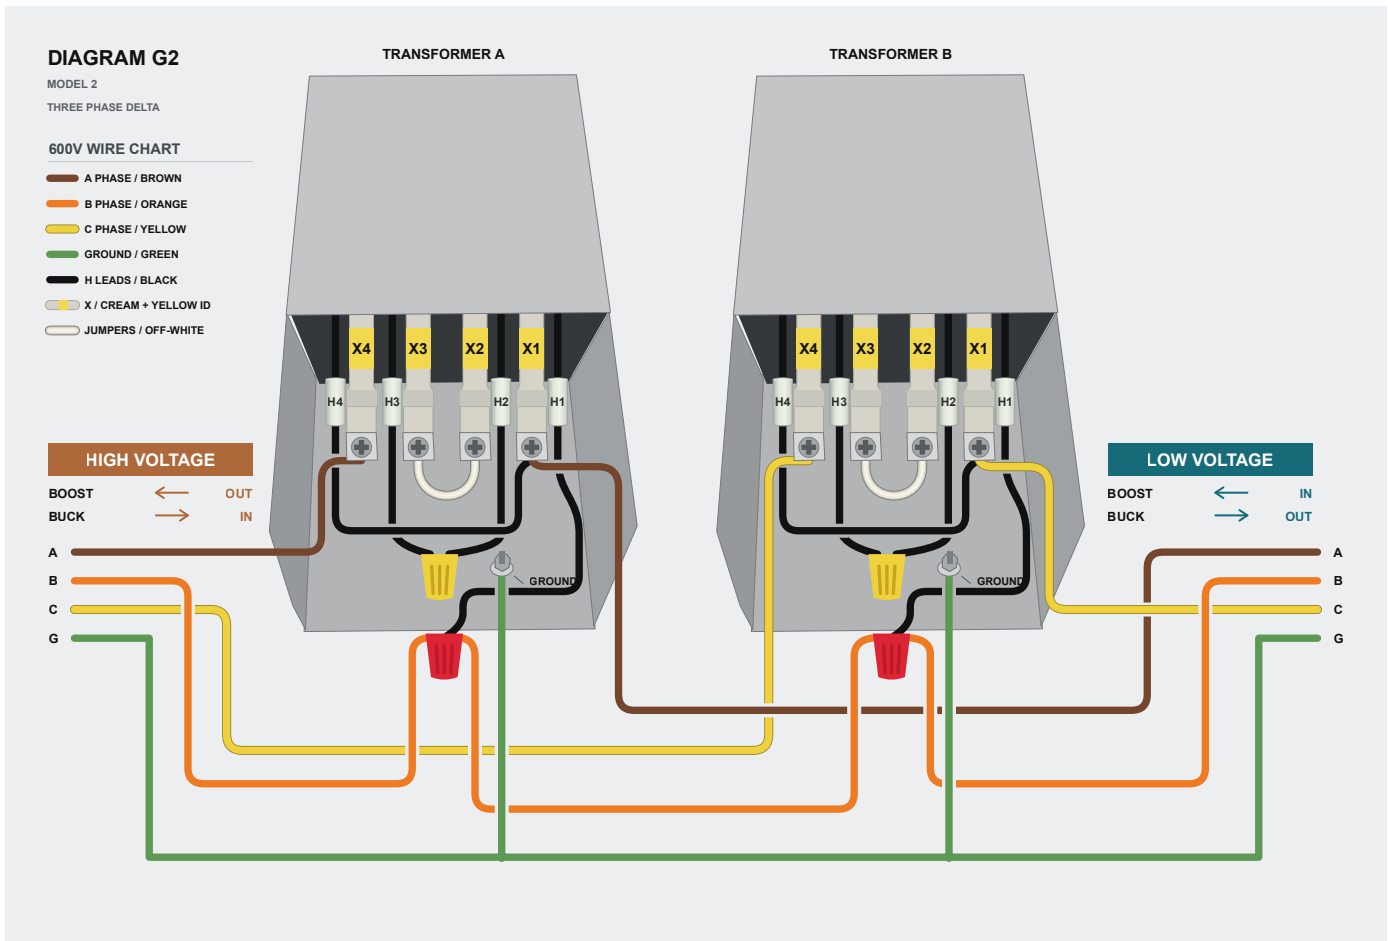

**Drawing: LOW VOLTAGE = 451 V OUTPUT; HIGH VOLTAGE = 496 V INPUT.**

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.