

Summary

Single-phase buck-boost transformer. 200 VA capacity. 240/480V primary, 24/48V secondary. Resin encapsulated. NEMA 3R indoor/outdoor enclosure. cETLus listed, wall mount.

Product Description

This single-phase buck-boost transformer is designed for voltage adjustment in commercial, industrial, and OEM applications. Rated at 200 VA with 240/480V primary and 24/48V secondary windings, this unit can be wired as an isolation transformer or configured as a buck-boost autotransformer to raise or lower line voltage.

The encapsulated core construction uses epoxy resin potting to eliminate audible hum and provide reliable thermal performance under continuous duty. Aluminum windings with 180°C insulation class ensure long-term durability.

Housed in a NEMA 3R rated steel enclosure with ANSI 61 grey finish. Features a front access wiring panel, six 1/2" NPT knockouts (side and bottom), and a surface mounting bracket for wall mount installation.



TX-B2-020H-115216 - NEMA 3R Encapsulated, cETLus Listed

Specifications

Specification	Value	Specification	Value
Phase	Single Phase (1-PH), AC	Transformer Type	Isolation Transformer
Capacity	200 VA	Configuration	Encapsulated Autotransformer
Primary Voltage	240/480V	Primary Termination	Lead Wires
Secondary Voltage	24/48V AC	Secondary Termination	Terminal Lugs
Frequency	50/60 Hz	Termination Access	Front Access Cover
Insulation	180°C	Winding Material	Aluminum
Temperature Rise	115°C	Enclosure Material	Steel
Maximum Primary OCP	1A	Finish Color	ANSI 61 Grey
Wiring Knockouts	(6) 1/2" NPT	Weight	11 lbs
Dimensions	4.77"W x 3.86"D x 8.07"H		

Ratings & Certifications

- Listed for United States
- Listed for Canada
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Epoxy Resin Encapsulated
- RoHS Compliant
- Can be Wired as Buck/Boost
- Can be Wired as Autotransformer




Common Applications


- HVAC & Minisplit
- CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in Coolers
- Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

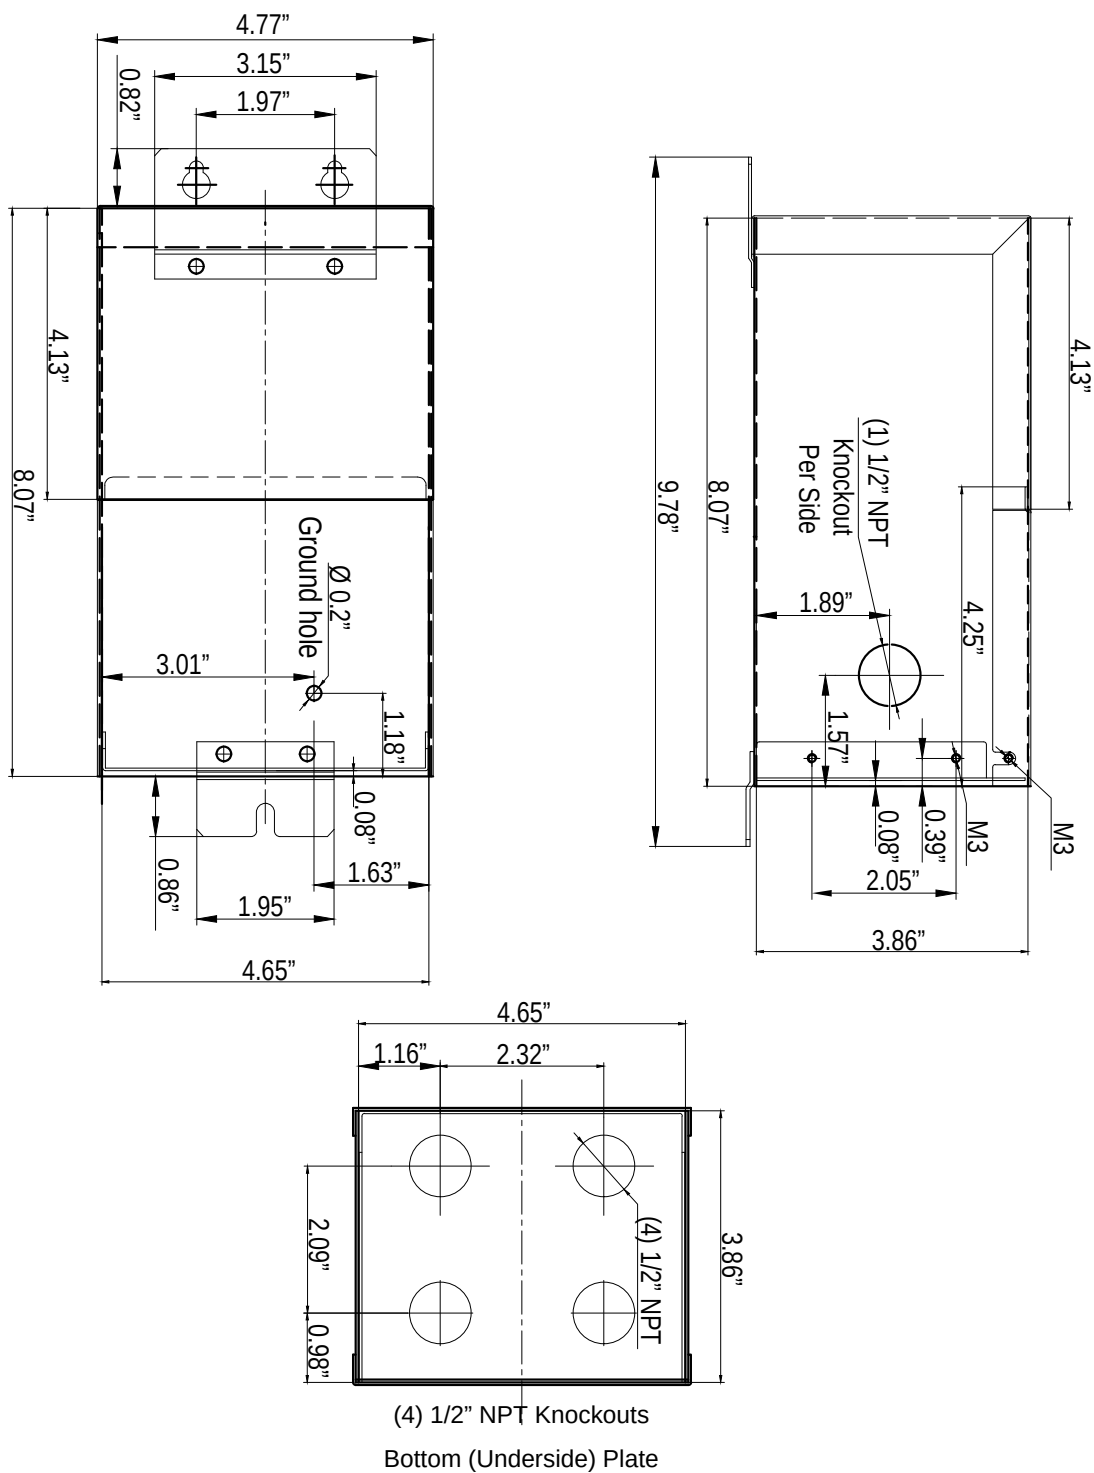

Wiring Diagram

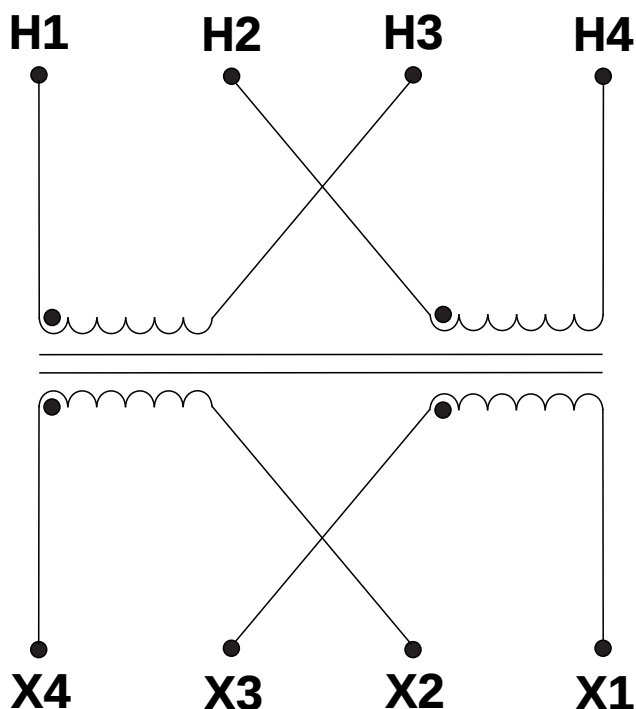

This unit is approved for connection as a buck/boost autotransformer to adjust line voltage up or down. All autotransformer installations must be wired in accordance with the applicable wiring configurations shown in Diagrams A2–P2.

- Diagrams A2-D2 for single phase
- Diagrams E2-H2 for three phase open delta
- Diagrams I2-L2 for three phase wye

Ensure that the primary and secondary windings are connected as illustrated for the intended buck or boost function. Confirm that voltage and kVA ratings are suitable for the load before energizing the transformer.



SANZO POWER
Specs: 240/480V TO 24/48V 200VA
Model: TX-B2-020H-115216

Pri **Sec**

H4 I1
H3 I2
H2 I3
H1 I4

Input:
240V (H1-H4)
Interconnect: H1-H2 & H3-H4
480V(H1-H4)
Interconnect: H2-H3

Output:
24V (X1-X4)
Interconnect: X1-X2 & X3-X4
48V(X1-X4)
Interconnect: X2-X3

ETL
US
Intertek
5027446
CONFORMS TO UL STD UL5085-1
CERTIFIED TO CSA C22.2#66.1

TX-B2-020H-115216 - NEMA 3R Encapsulated, cETLus Listed



Side View



Rear View - Surface Mount Bracket



Wiring Compartment - Terminal Leads



Interior - Epoxy Resin Encapsulated Core