

Summary

Single-phase buck-boost transformer. Steps up 170V to 208V at 72.12 amps continuous output. 15 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 170V building supply to 208V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 208V that is installed on a 170V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 72.12-amp buck-boost transformer is significantly smaller and lighter than a 72.12-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-170V-208V-15KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	15 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	170V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	88.24A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	208V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	72.12A	Winding Material	Aluminum
Maximum Primary OCP	110A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	60 lbs
Temperature Rise	115°C	Dimensions	7.68"-W x 6.38"-D x 12.2"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Front View, Side View, and Top View. Dimensions are in inches.

Front View: Overall dimensions are 12.21" (width) and 8.27" (height). The top section has a width of 6.58" and a height of 2.95". The top section features a ground hole (Ø 0.2") and a 3/4" NPT knockout. The bottom section has a width of 7.68" and a height of 1.18". The bottom section features a 3/4" NPT knockout.


Side View: Overall dimensions are 14.36" (width) and 6.38" (height). The top section has a width of 12.21" and a height of 1.26". The top section features a 3/4" NPT knockout. The bottom section has a width of 6.38" and a height of 1.14". The bottom section features a 3/4" NPT knockout.

Top View: Overall dimensions are 7.68" (width) and 6.38" (height). The top section has a width of 5.35" and a height of 1.16". The top section features a 3/4" NPT knockout. The bottom section has a width of 7.68" and a height of 1.18". The bottom section features a 3/4" NPT knockout.

Connection Guide

1. Connect **X4** and **X2** together
2. Connect High Voltage **L1** to **X4** and **X3**
3. Connect **X2** and **X1** together
4. Connect Low Voltage **L1** to **X1**, **X2**, **H4**, **H3**
5. Connect High & Low Voltage **L2** to **H1** and **H2**

DIAGRAM A2

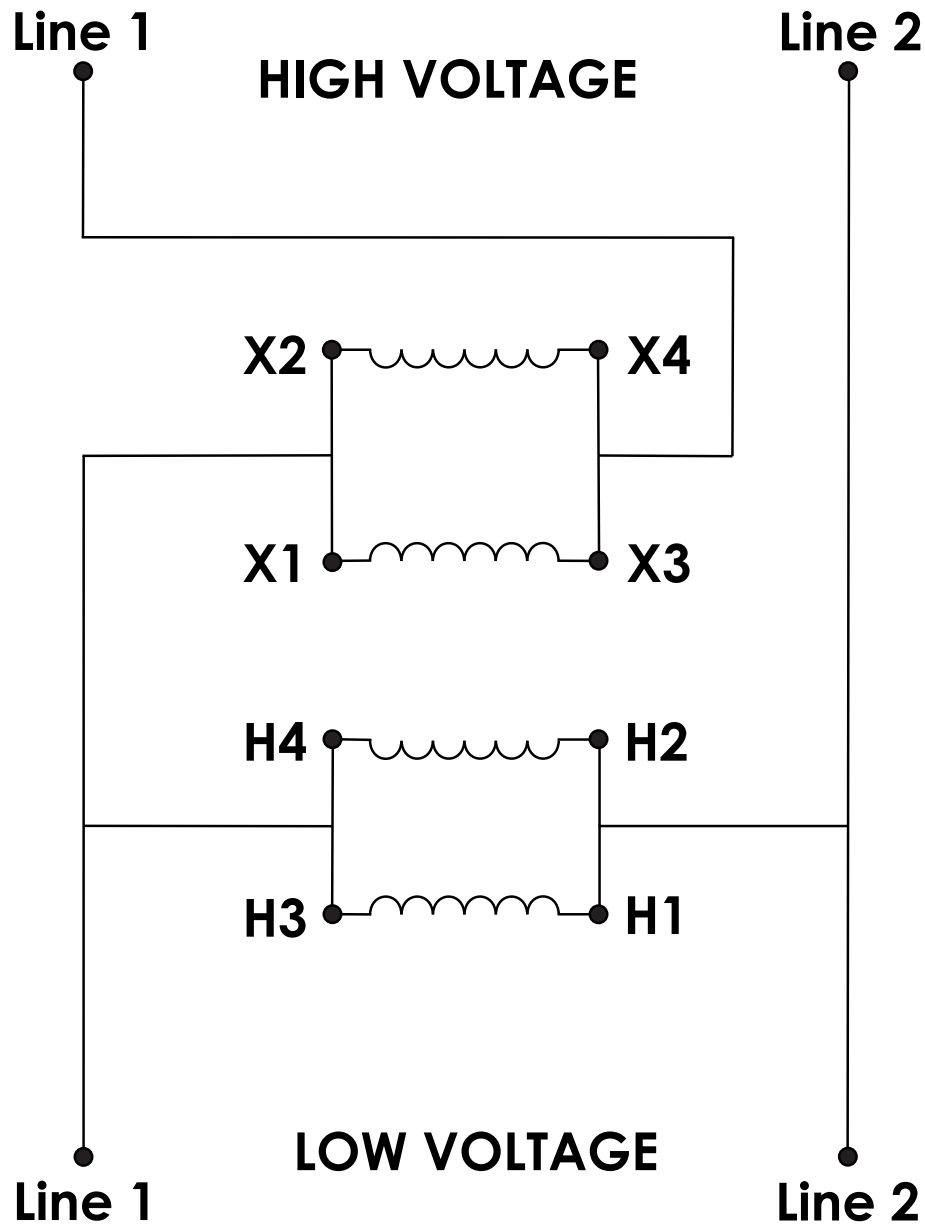



TX-BB-170V-208V-15KVA — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core