

## Summary

Three-phase delta buck-boost transformer. Steps up 200V to 220V at 6.25 amps continuous output. 2.382 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

## Product Description

This unit corrects a 200V three phase building supply to 220V delta at the point of use, permanently, without modifying the building's electrical service.

Designed for equipment rated 220V that is installed on a 200V system experiencing undervoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 6.25-amp buck-boost transformer is significantly smaller and lighter than a 6.25-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-200D-220D-6.25A — NEMA 3R Encapsulated, cETLus Listed

## Specifications

|                     |                              |                       |                              |
|---------------------|------------------------------|-----------------------|------------------------------|
| Phase               | Three Phase Delta (3-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 2.382 kVA                    | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 200V                         | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 6.88A                        | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 220V                         | Termination Access    | (6) 1/2" NPT Hubs            |
| Secondary Amperage  | 6.25A                        | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 15A                          | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                     | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                        | Weight                | 18 lbs                       |
| Temperature Rise    | 115°C                        | Dimensions            | 10.3 x 3.86 x 8.07           |

## Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




## Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

## Dimensions

Three-phase open delta installation — (2) enclosures required. Drawing depicts one enclosure.

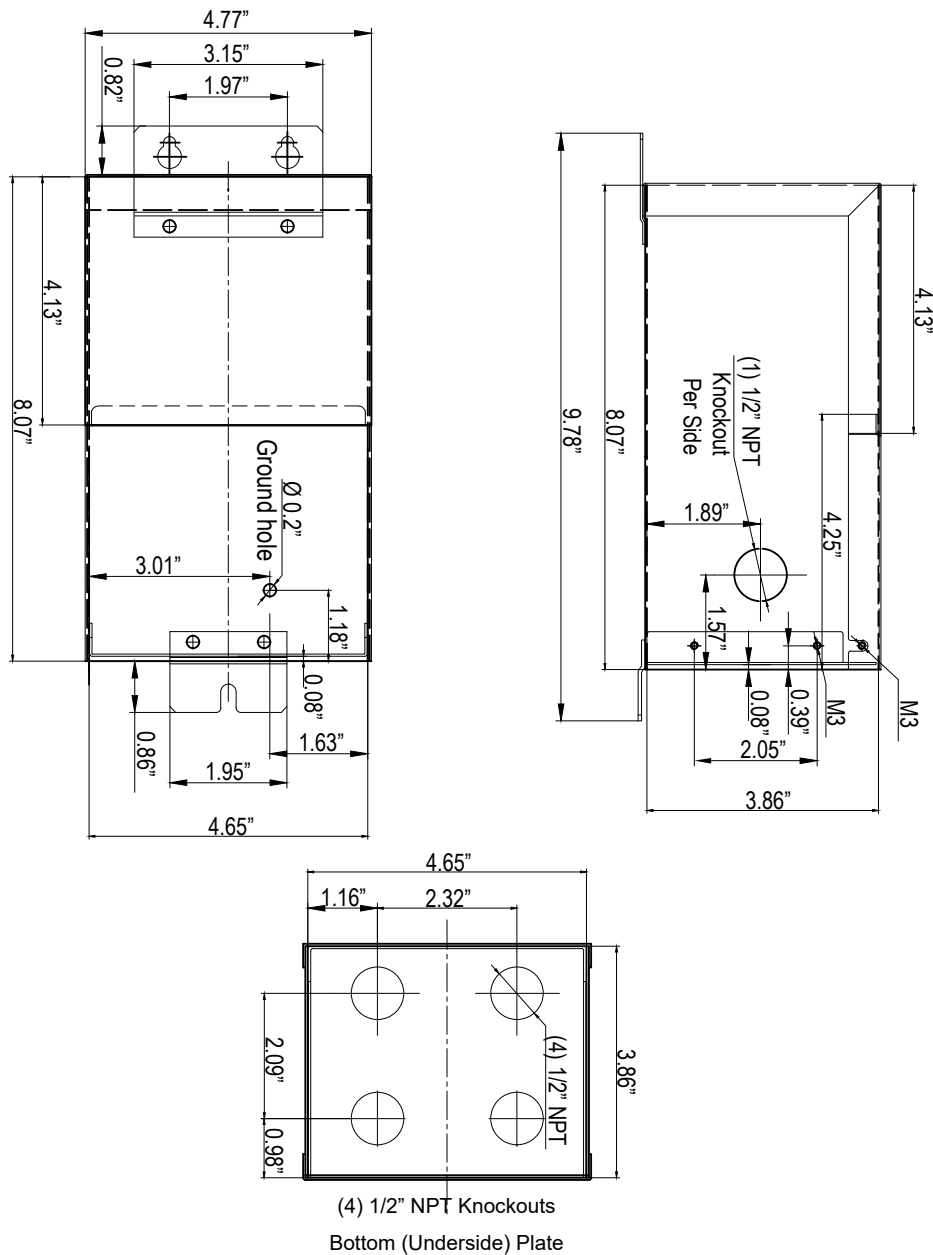


## Connection Guide

1. Connect X2 and X3 together for each transformer
2. Connect High Voltage PHASE A to X4 on transformer A
3. Connect High Voltage PHASE C to X4 on transformer B
4. Connect Low Voltage PHASE A to X1, H4, H3 on transformer A
5. Connect Low Voltage PHASE C to X1, H4, H3 on transformer B
6. Connect High & Low Voltage PHASE B to H1 and H2
7. Bridge H1 and H2 connections between Transformers A & B

### DIAGRAM F2

#### HIGH VOLTAGE

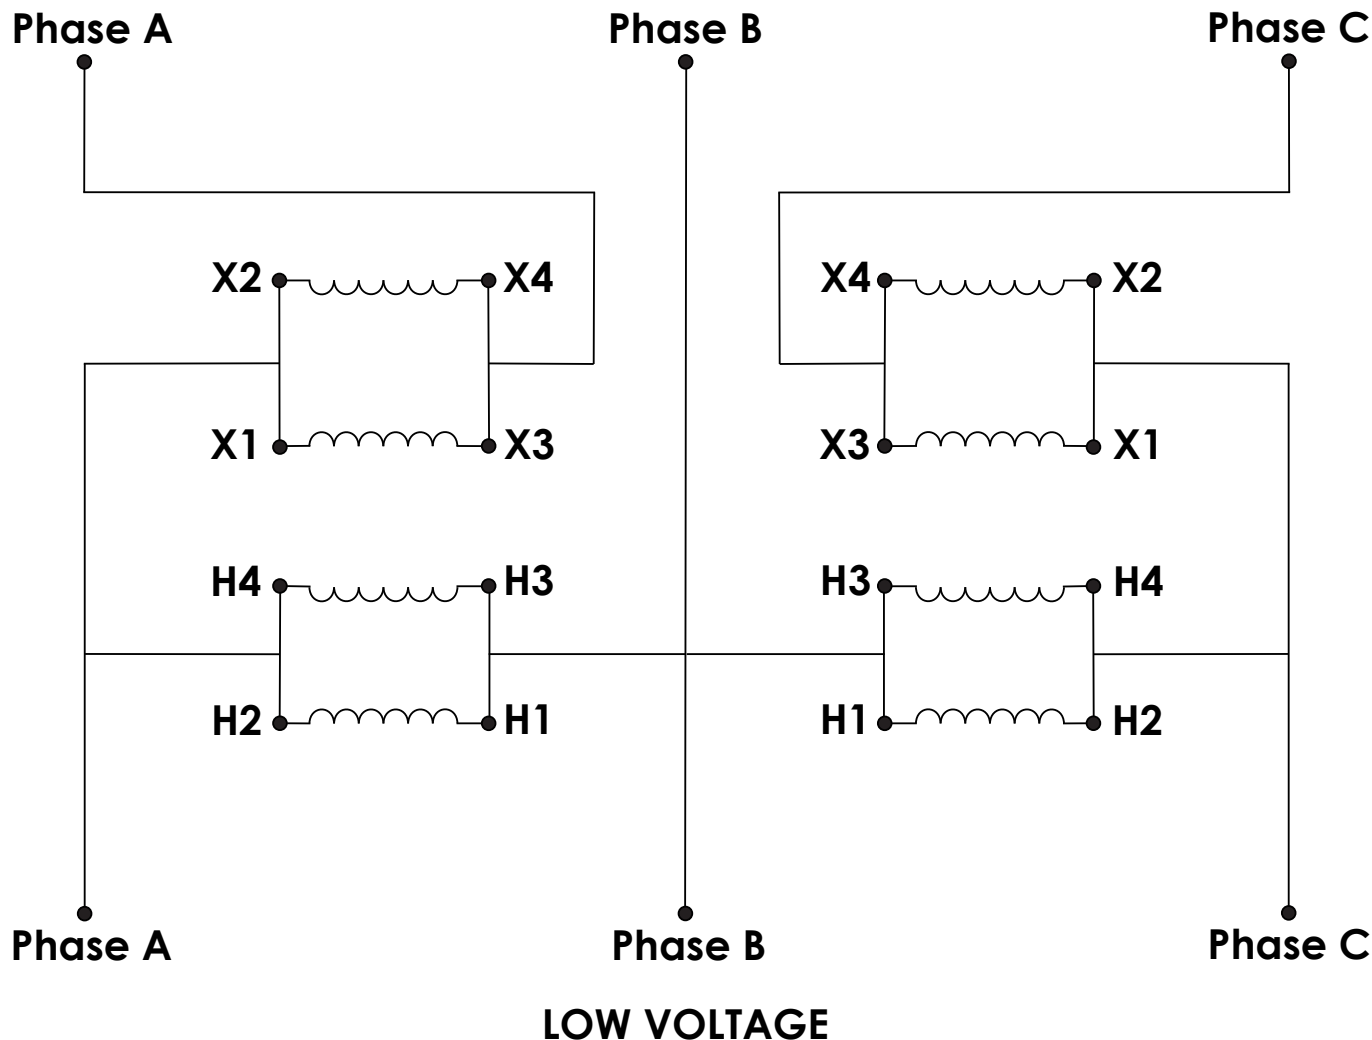



TX-BB-200D-220D-6.25A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4)  $\frac{3}{4}$ " NPT



Side View



*Rear View — Surface Mount Bracket*



Wiring Compartment — Terminal Leads





*Interior — Epoxy Resin Encapsulated Core*