

## Summary

Three-phase delta buck-boost transformer. Steps up 208V to 222V at 31.25 amps continuous output. 12.016 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

## Product Description

This unit corrects a 208V three phase building supply to 222V delta at the point of use, permanently, without modifying the building's electrical service.

Designed for equipment rated 222V that is installed on a 208V system experiencing undervoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 31.25-amp buck-boost transformer is significantly smaller and lighter than a 31.25-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-208D-222D-31.25A — NEMA 3R Encapsulated, cETLus Listed

## Specifications

|                     |                              |                       |                              |
|---------------------|------------------------------|-----------------------|------------------------------|
| Phase               | Three Phase Delta (3-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 12.016 kVA                   | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 208V                         | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 33.35A                       | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 222V                         | Termination Access    | (6) 1/2" NPT Hubs            |
| Secondary Amperage  | 31.25A                       | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 50A                          | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                     | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                        | Weight                | 34 lbs                       |
| Temperature Rise    | 115°C                        | Dimensions            | 10.3 x 3.86 x 9.25           |

## Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




## Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

## Dimensions

Three-phase open delta installation — (2) enclosures required. Drawing depicts one enclosure.

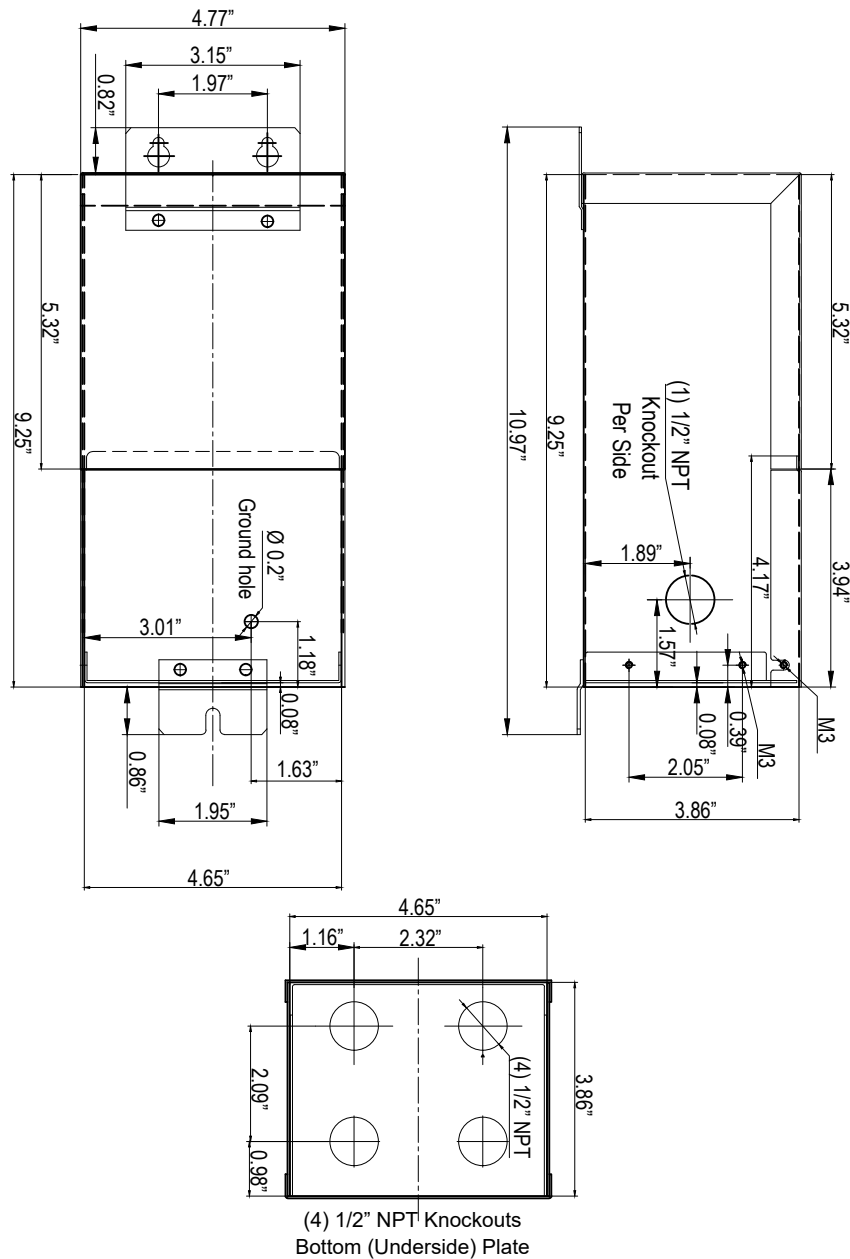


## Connection Guide

1. Connect **X4** and **X3** together for each transformer
2. Connect **X2** and **X1** together for each transformer
3. Connect High Voltage **PHASE A** to **X4**, **X3** on transformer A
4. Connect High Voltage **PHASE C** to **X4**, **X3** on transformer B
5. Connect Low Voltage **PHASE A** to **X1**, **X2**, **H4** on transformer A
6. Connect Low Voltage **PHASE C** to **X1**, **X2**, **H4** on transformer B
7. Connect **H2** and **H3** together for each transformer
8. Connect High & Low Voltage **PHASE B** to **H1**
9. Bridge **H1** connections between Transformer A & B

### DIAGRAM H2

#### HIGH VOLTAGE

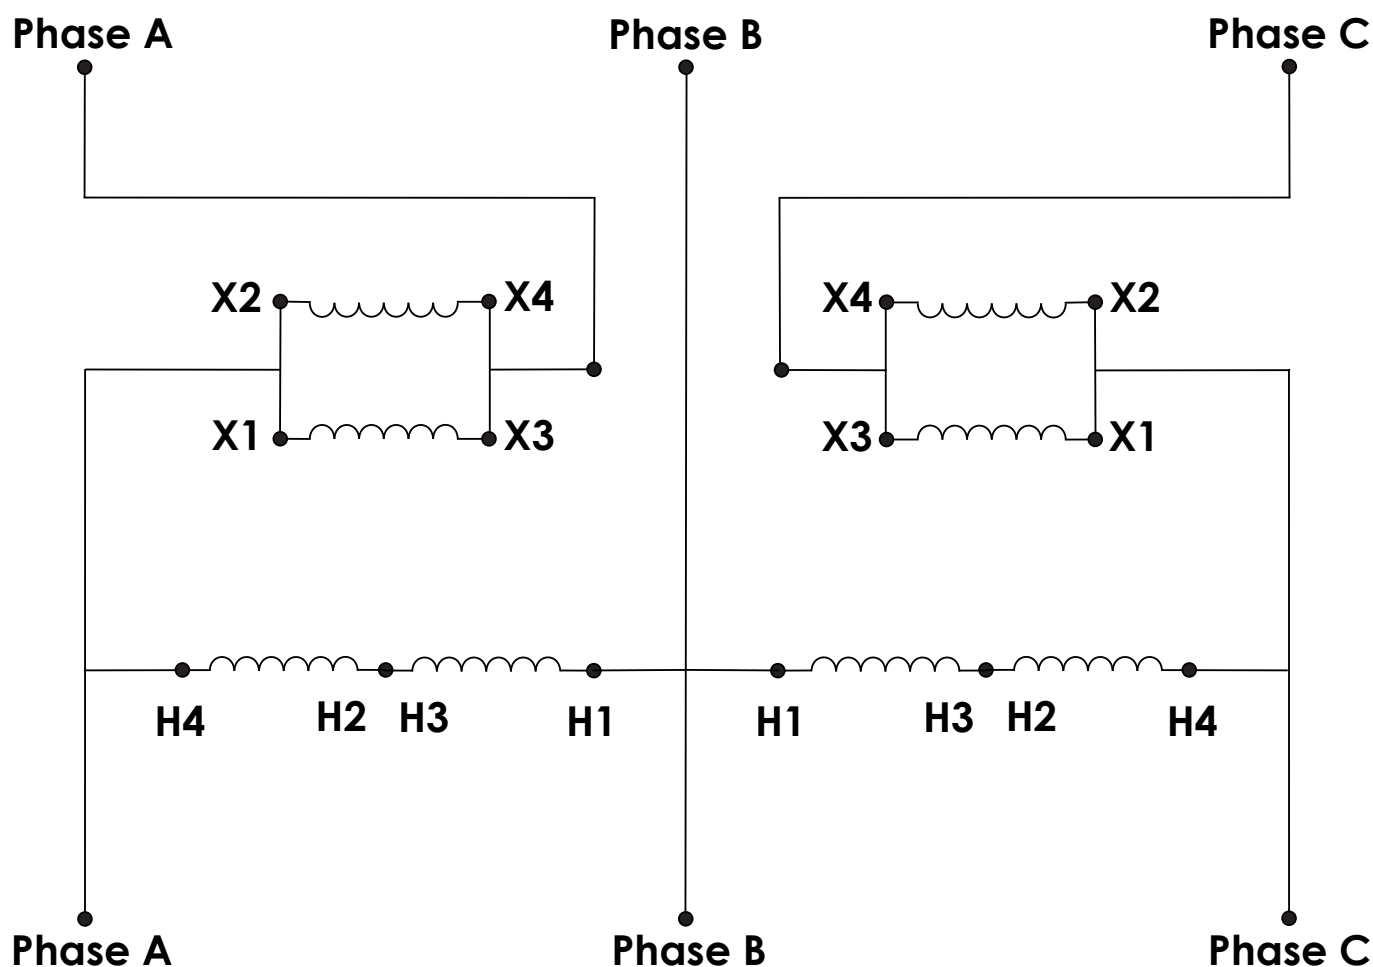


#### LOW VOLTAGE



TX-BB-208D-222D-31.25A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4)  $\frac{3}{4}$ " NPT

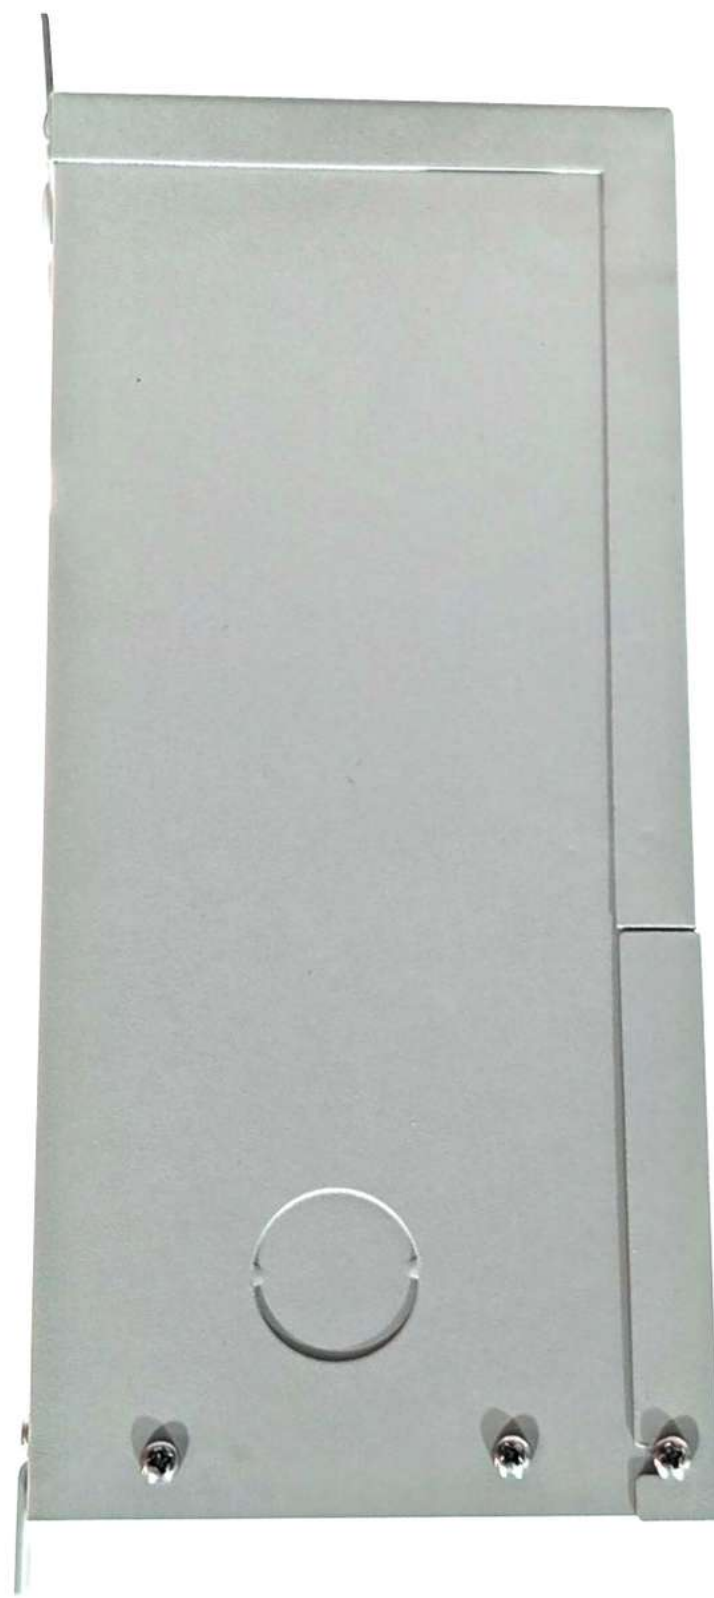

Side View



*Rear View — Surface Mount Bracket*



Wiring Compartment — Terminal Leads



*Interior — Epoxy Resin Encapsulated Core*