



Summary

Single-phase buck-boost transformer. Steps up 217V to 230V at 163.04 amps continuous output. 37.5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 217V building supply to 230V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 230V that is installed on a 217V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 163.04-amp buck-boost transformer is significantly smaller and lighter than a 163.04-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-217V-230V-37.5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	37.5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	217V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	172.81A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	230V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	163.04A	Winding Material	Aluminum
Maximum Primary OCP	225A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	52 lbs
Temperature Rise	115°C	Dimensions	7.68"-W x 6.38"-D x 12.2"-H

Ratings & Certifications

- Listed for United States
 - NEMA 3R Indoor/Outdoor Enclosure
 - Built to UL-50 Standards
 - CE Certified
- Listed for Canada
 - Epoxy Resin Encapsulated
 - RoHS Compliant



Common Applications

- HVAC & Minisplit
 - Loads CNC Machines
 - Pump Stations
 - Packaging Machines
- Commercial Kitchen Equipment
 - Motor Loads
 - EV Chargers
 - Server Racks & IT Equipment
- Refrigeration & Walk-in
 - Coolers Fans & Blowers
 - Conveyor Systems
 - Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Front View, Side View, and Top View.

Front View Dimensions:

- Overall Width: 12.21"
- Overall Height: 8.27"
- Top Flange Width: 6.58"
- Top Flange Height: 1.26"
- Distance between hole centerlines: 2.95"
- Distance from flange edge to hole centerline: 1.14"
- Ground hole: $\varnothing 0.2"$
- Distance from right edge to ground hole: 1.18"
- Mounting bracket width: 1.95"
- Mounting bracket height: 0.86"
- Overall Width (bottom): 7.68"

Side View Dimensions:

- Overall Height: 14.36"
- Overall Width: 6.38"
- Top Flange Height: 4.25"
- Top Flange Width: 1.57"
- Distance from top edge to knockout: 1.67"
- Distance from right edge to knockout: 1.57"
- Knockout: (1) 3/4" NPT Knockout Per Side
- Distance from bottom edge to knockout: 0.79"
- Distance from right edge to knockout: 4.6"
- Distance from bottom edge to knockout: 0.08"
- Distance from right edge to knockout: 0.89"
- Distance from bottom edge to knockout: 1.38"
- Knockout: M3

Top View Dimensions:


- Overall Width: 7.68"
- Overall Height: 6.38"
- Distance from left edge to knockout: 1.16"
- Distance from left edge to knockout: 5.35"
- Distance from bottom edge to knockout: 0.95"
- Distance from bottom edge to knockout: 4.41"
- Knockouts: (4) 3/4" NPT Knockouts

Bottom (Underside) Plate

Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

DIAGRAM D2

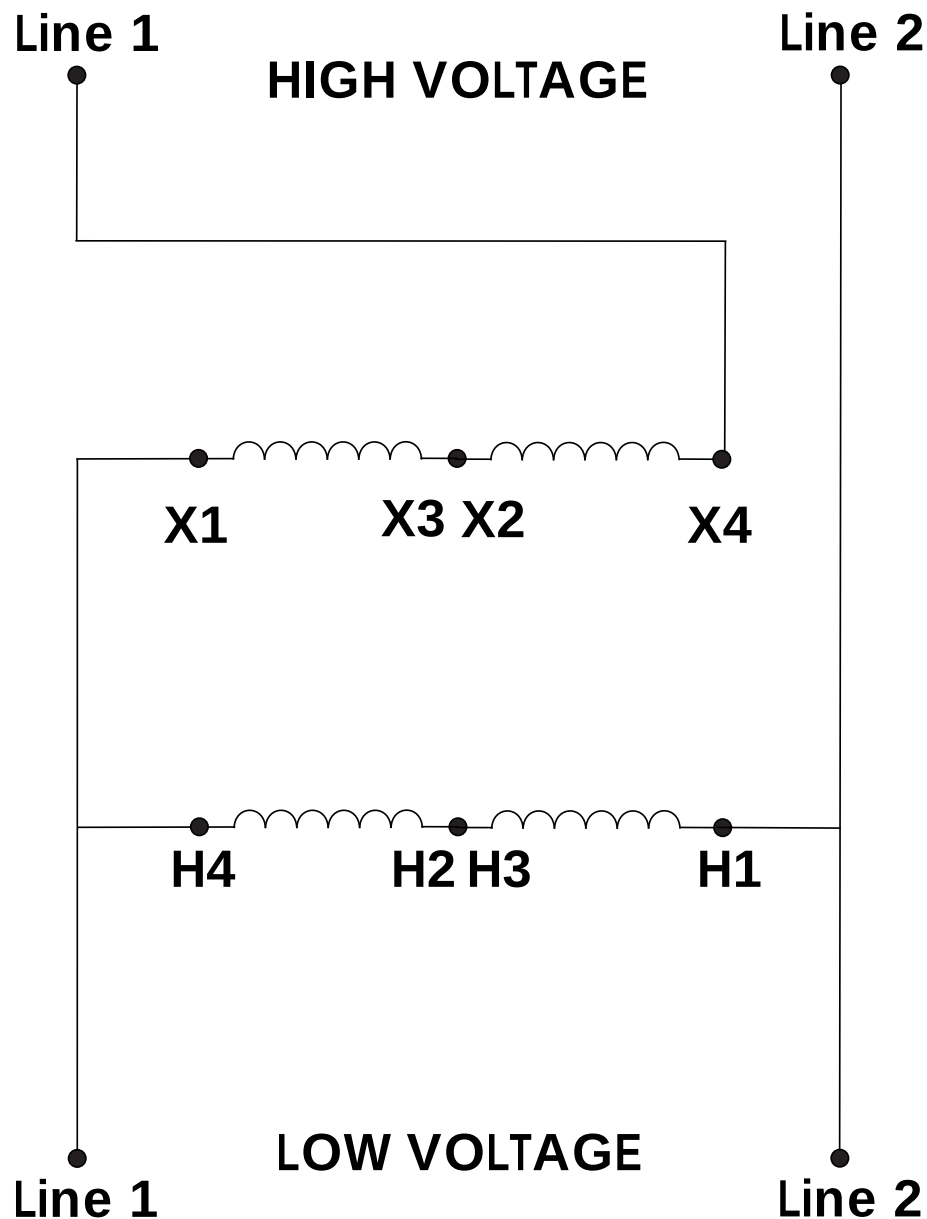



TX-BB-217V-230V-37.5KVA — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) $\frac{3}{4}$ " NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core