



Summary

Single-phase buck-boost transformer. Steps down 220V to 200V at 12.5 amps continuous output. 2.5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 220V building supply to 200V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 200V that is installed on a 220V system experiencing overvoltage.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 12.5-amp buck-boost transformer is significantly smaller and lighter than a 12.5-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-220V-200V-2.5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	2.5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	220V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	11.36A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	200V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	12.5A	Winding Material	Aluminum
Maximum Primary OCP	15A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	12 lbs
Temperature Rise	115°C	Dimensions	4.65"-W x 3.86"-D x 8.07"-H

Ratings & Certifications

- Listed for United States
 - NEMA 3R Indoor/Outdoor Enclosure
 - Built to UL-50 Standards
 - CE Certified
- Listed for Canada
 - Epoxy Resin Encapsulated
 - RoHS Compliant




Common Applications

- HVAC & Minisplit
 - Loads CNC Machines
 - Pump Stations
 - Packaging Machines
- Commercial Kitchen Equipment
 - Motor Loads
 - EV Chargers
 - Server Racks & IT Equipment
- Refrigeration & Walk-in
 - Coolers Fans & Blowers
 - Conveyor Systems
 - Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

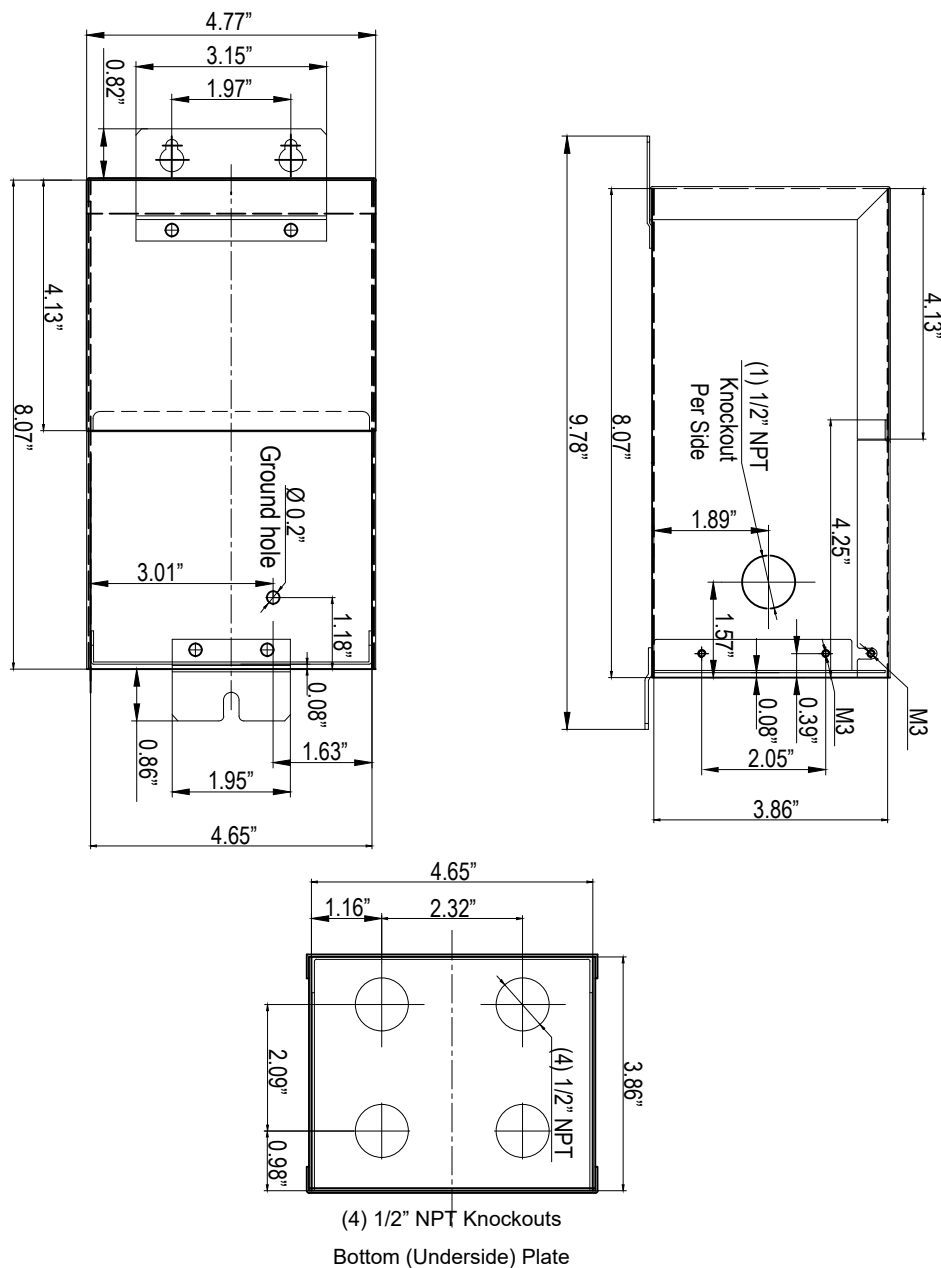


(4) 1/2" NPT Knockouts
Bottom (Underside) Plate

Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

DIAGRAM D2

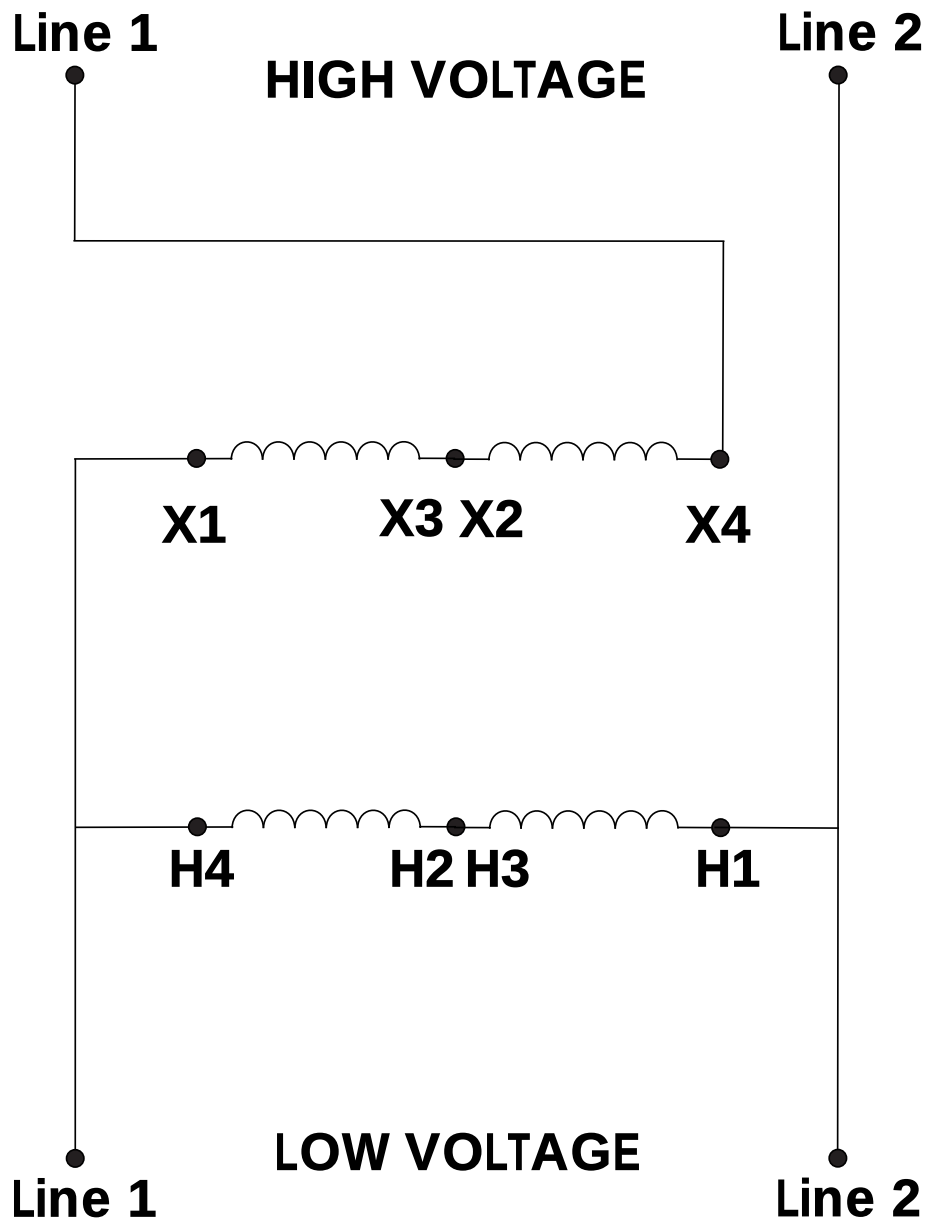



TX-BB-220V-200V-2.5KVA — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core