

### Summary

Three-phase wye buck-boost transformer. Steps up 220V to 242V at 20 amps continuous output. 8.38 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

### Product Description

This unit corrects a 220V three phase building supply to 242V wye at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 242V that is installed on a 220V system experiencing undervoltage from the utility.

Configured as a wye autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 20-amp buck-boost transformer is significantly smaller and lighter than a 20-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-220Y-242Y.140-20A — NEMA 3R Encapsulated, cETLus Listed

### Specifications

|                     |                            |                       |                              |
|---------------------|----------------------------|-----------------------|------------------------------|
| Phase               | Three Phase Wye (3-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 8.38 kVA                   | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 220V                       | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 22.00A                     | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 242V                       | Termination Access    | (6) 1/2" NPT Hubs            |
| Secondary Amperage  | 20A                        | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 30A                        | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                   | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                      | Weight                | 51 lbs                       |
| Temperature Rise    | 115°C                      | Dimensions            | 4.65 x 3.86 x 9.25           |

### Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



### Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

## Dimensions

Three-phase wye installation — (3) enclosures required.




## Connection Guide

1. Connect X2 and X3 together for each transformer
2. Connect High Voltage PHASE A to X4 on transformer A
3. Connect High Voltage PHASE C to X4 on transformer B
4. Connect Low Voltage PHASE A to X1, H4, H3 on transformer A
5. Connect Low Voltage PHASE C to X1, H4, H3 on transformer B
6. Connect High & Low Voltage PHASE B to H1 and H2
7. Bridge H1 and H2 connections between Transformers A & B

### DIAGRAM F2

#### HIGH VOLTAGE

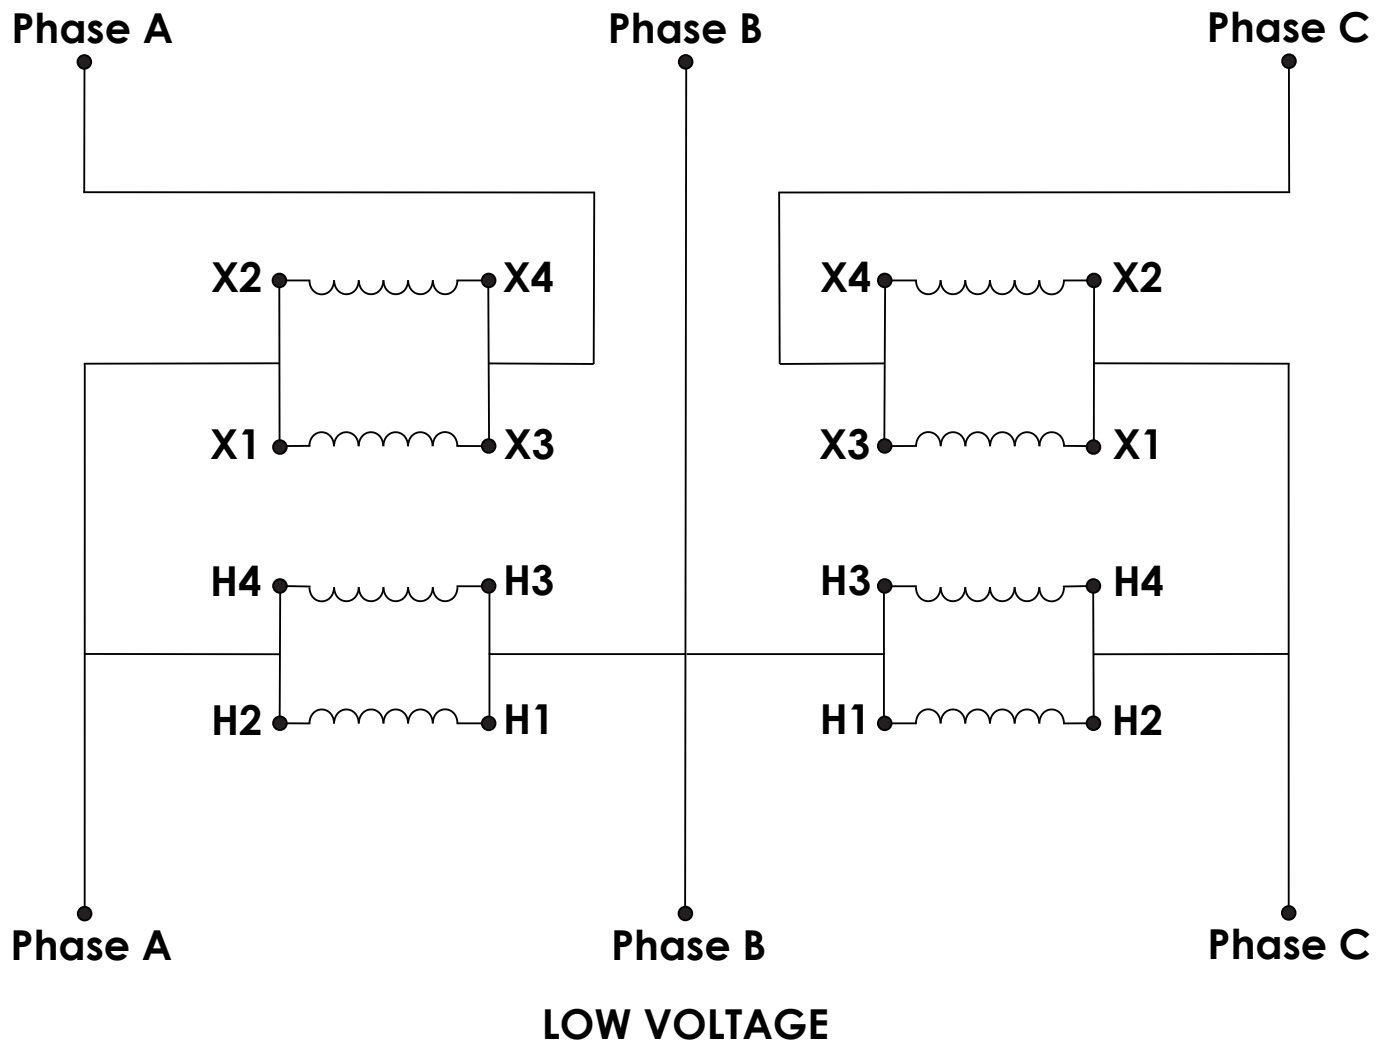



TX-BB-220Y-242Y.140-20A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4)  $\frac{3}{4}$ " NPT



*Side View*



*Rear View — Surface Mount Bracket*



Wiring Compartment — Terminal Leads



*Interior — Epoxy Resin Encapsulated Core*