

Summary

Three-phase delta buck-boost transformer. Steps down 250V to 221V at 30 amps continuous output. 11.48 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 250V three phase building supply to 221V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 221V that is installed on a 250V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 30-amp buck-boost transformer is significantly smaller and lighter than a 30-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-250D-221D-30A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	11.48 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	250V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	26.50A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	221V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	30A	Winding Material	Aluminum
Maximum Primary OCP	40A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	54 lbs
Temperature Rise	115°C	Dimensions	12.01"-W x 5.5"-D x 10.5"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required.

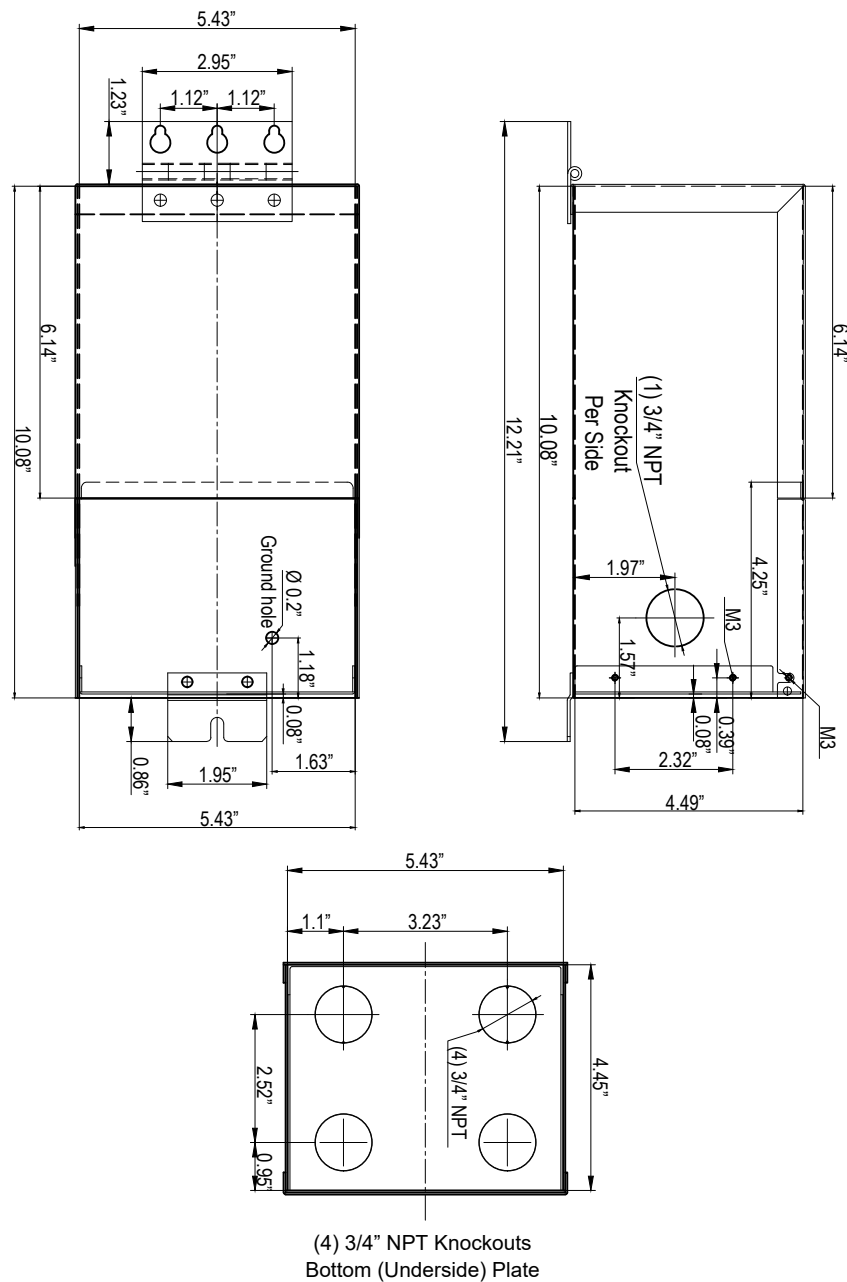


Connection Guide

1. Connect **X2** and **X3** together for both transformers
2. Connect **H2** and **H3** together for both transformers
3. Connect High Voltage **PHASE A** to **X4** on transformer A
4. Connect High Voltage **PHASE C** to **X4** on transformer B
5. Connect Low Voltage **PHASE A** to **H4** and **X1** on transformer A
6. Connect Low Voltage **PHASE C** to **H4** and **X1** on transformer B
7. Connect High & Low Voltage **PHASE B** to **H1**
8. Bridge **H1** connections between transformer A & B

DIAGRAM G2

HIGH VOLTAGE

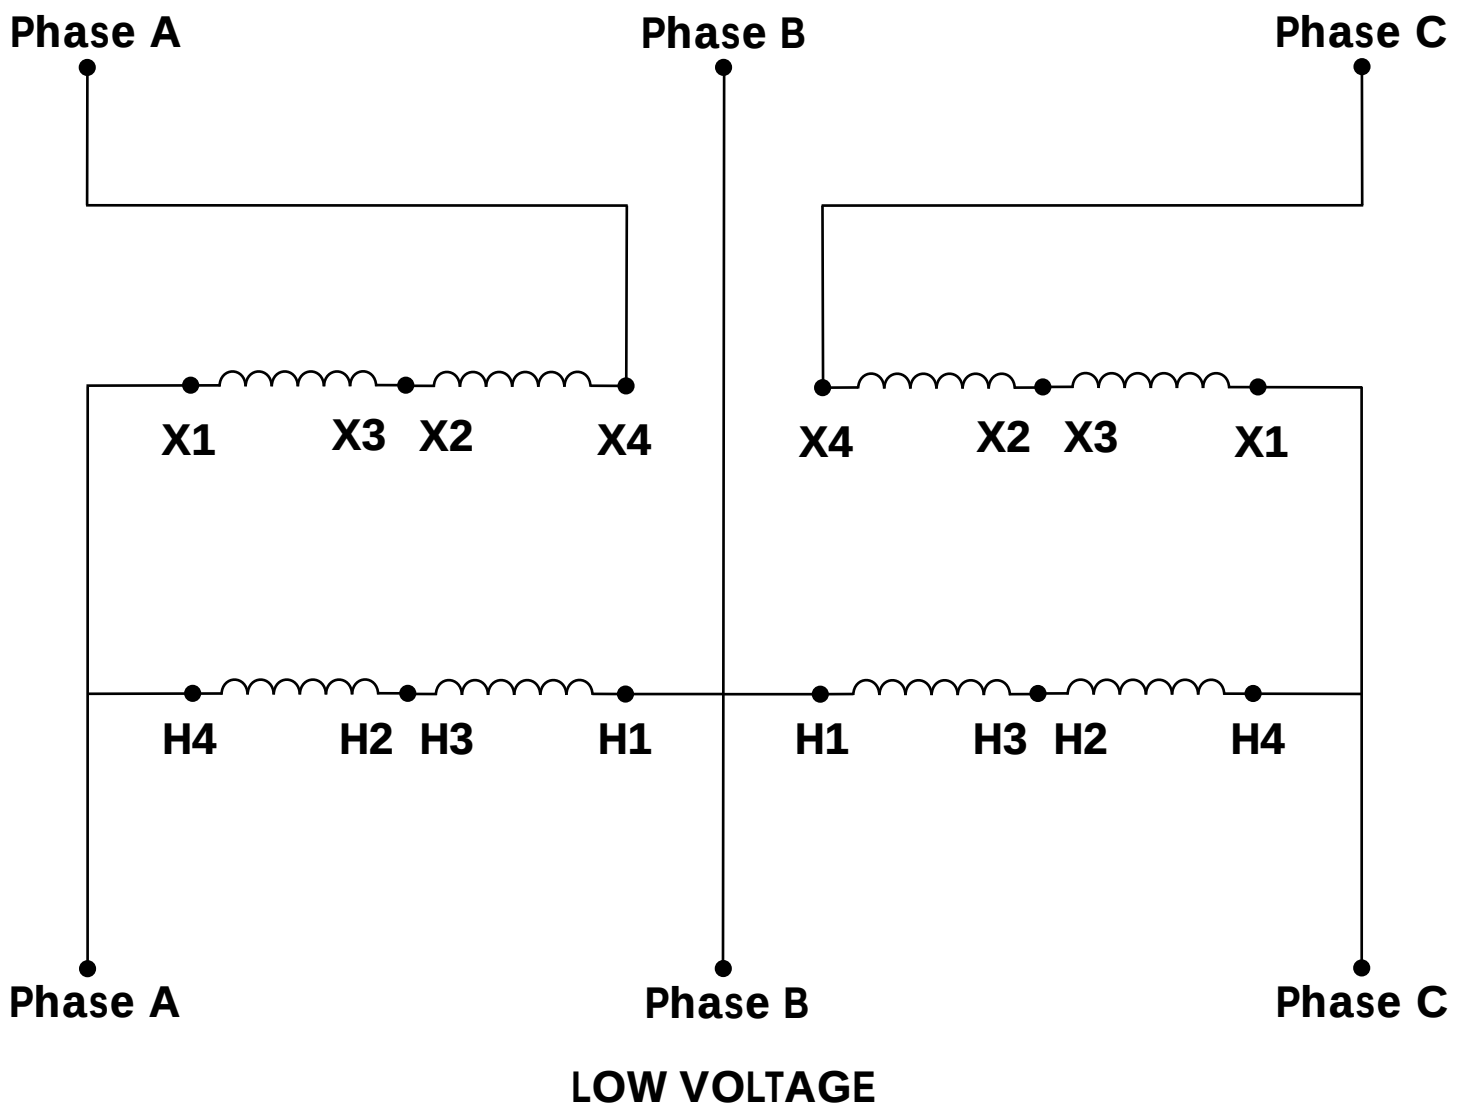



sales@sanzosales.com

The image displays two identical gray metal autotransformers from Sanzo Sales, model TX-BB-250D-221D-30A. Each unit features a hinged top cover with three mounting holes. The front panel has a white label with the following information:

SANZO SALES
TX-BB-250D-221D-30A

Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	208V	Max. VA:	30kVA
Output Voltage:	208V	Frequency:	50/60 Hz
Isolation:	1:1	Insulation:	100% Class B
Max. Input Amps:	144A	Temp. Rise:	100°C
Max. Output Amps:	144A	Weight:	45kg (100lb)

Conforms to UL 1551, IEC 60076-1, and IEC 60076-2
 Conforms to UL 1551, IEC 60076-1, and IEC 60076-2
 Size: 4' x 12' x 12' (H x W x D) 100kg (220lb)

Autotransformer

Sanzo Sales Inc. 10000 15th St. Unit 100, San Diego, CA 92128
 Tel: 619-594-1100 Fax: 619-594-1101

The second unit on the right has a similar label with the following specifications:

SANZO SALES
TX-BB-250D-221D-30A

Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	208V	Max. VA:	30kVA
Output Voltage:	208V	Frequency:	50/60 Hz
Isolation:	1:1	Insulation:	100% Class B
Max. Input Amps:	144A	Temp. Rise:	100°C
Max. Output Amps:	144A	Weight:	45kg (100lb)

Conforms to UL 1551, IEC 60076-1, and IEC 60076-2
 Conforms to UL 1551, IEC 60076-1, and IEC 60076-2
 Size: 4' x 12' x 12' (H x W x D) 100kg (220lb)

Autotransformer

Sanzo Sales Inc. 10000 15th St. Unit 100, San Diego, CA 92128
 Tel: 619-594-1100 Fax: 619-594-1101

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core