



Summary

Three-phase delta buck-boost transformer. Steps up 240V to 264V at 10.93 amps continuous output. 5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 240V three phase building supply to 264V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 264V that is installed on a 240V system experiencing undervoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 10.93-amp buck-boost transformer is significantly smaller and lighter than a 10.93-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-240D-264D-5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	240V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	12.03A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	264V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	10.93A	Winding Material	Aluminum
Maximum Primary OCP	15A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	28 lbs
Temperature Rise	115°C	Dimensions	9.25"-W x 5.75"-D x 7.25"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase open delta installation — (2) enclosures required.

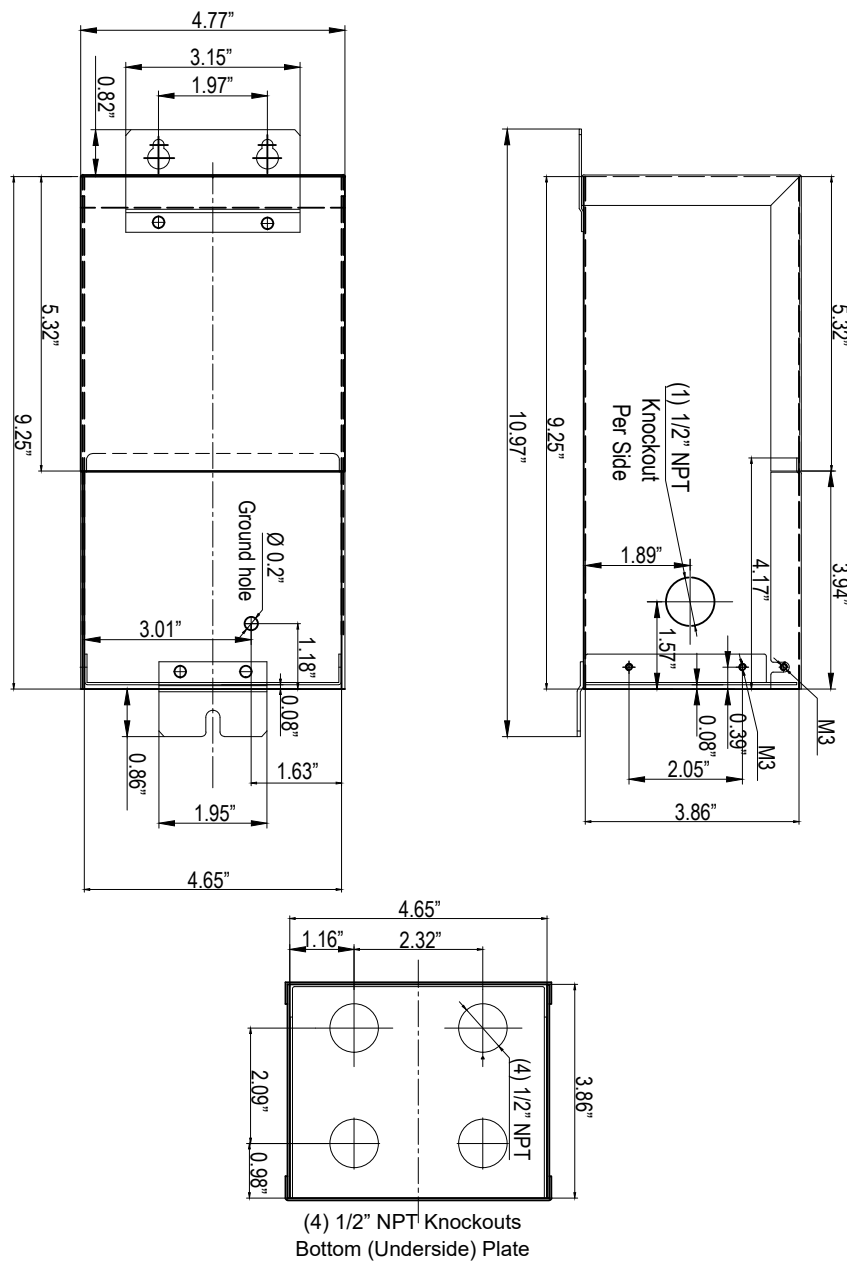


Connection Guide

1. Connect **X2** and **X3** together for both transformers
2. Connect **H2** and **H3** together for both transformers
3. Connect High Voltage **PHASE A** to **X4** on transformer A
4. Connect High Voltage **PHASE C** to **X4** on transformer B
5. Connect Low Voltage **PHASE A** to **H4** and **X1** on transformer A
6. Connect Low Voltage **PHASE C** to **H4** and **X1** on transformer B
7. Connect High & Low Voltage **PHASE B** to **H1**
8. Bridge **H1** connections between transformer A & B

DIAGRAM G2

HIGH VOLTAGE





sales@sanzosales.com

The image shows two identical grey metal autotransformers standing side-by-side. Each unit has a top handle with two finger loops. The front panel of each unit features a white label with the Sanzo Sales logo (a stylized 'A' inside a house-like shape) and the model number 'TX-BB-240D-208D-12.4A'. Below the model number, there is a table of specifications. The left unit's label also includes a 'Listed' ETL mark and a 'UL 516' certification. The right unit's label includes a 'Listed' ETL mark and a 'UL 516' certification. Both units have a 'NEMA 3R' enclosure rating and a '12.4A' output current. The bottom of each unit has a small circular access point.

SANZO SALES

TX-BB-240D-208D-12.4A

Power:	Single Phase	Configuration:	Autotransformer
Input Voltage:	240V	Max BCP:	45A
Output Voltage:	208V	Frequency:	60Hz
Rated Output:	12.4A	Insulation:	100°C
Max Input Amps:	24.0A	Temp Rise:	10°C
Max Output Amps:	12.4A	Windings:	Aluminum

Enclosure Type: NEMA 3R for Indoor or Outdoor Use
 Conductor: 12 AWG
 Conductor in Cable: 12 AWG
 Breaker: 12.4A @ 120V/208V 1-Phase 3-Wire

Autotransformer

LISTED
 ETL
 UL 516

CONFORMS TO UL 516-12.4A-12.4A
 CERTIFIED TO CAN/CSA 1000-1

SANZO SALES

TX-BB-240D-208D-12.4A

Power:	Single Phase	Configuration:	Autotransformer
Input Voltage:	240V	Max BCP:	45A
Output Voltage:	208V	Frequency:	60Hz
Rated Output:	12.4A	Insulation:	100°C
Max Input Amps:	24.0A	Temp Rise:	10°C
Max Output Amps:	12.4A	Windings:	Aluminum

Enclosure Type: NEMA 3R for Indoor or Outdoor Use
 Conductor: 12 AWG
 Conductor in Cable: 12 AWG
 Breaker: 12.4A @ 120V/208V 1-Phase 3-Wire

Autotransformer

LISTED
 ETL
 UL 516

CONFORMS TO UL 516-12.4A-12.4A
 CERTIFIED TO CAN/CSA 1000-1

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core