

Summary

Single-phase buck-boost transformer. Steps down 250V to 234V at 30 amps continuous output. 7.02 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 250V building supply to 234V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 234V that is installed on a 250V system experiencing overvoltage.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 30-amp buck-boost transformer is significantly smaller and lighter than a 30-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-250V-234V-30A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	7.02 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	250V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	28.10A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	234V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	30A	Winding Material	Aluminum
Maximum Primary OCP	40A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	17 lbs
Temperature Rise	115°C	Dimensions	4.65"-W x 3.86"-D x 9.25"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Top, Front, and Bottom.

Top View:

- Overall dimensions: 4.77" (width) x 5.32" (height).
- Two circular knockouts at the top, each with a diameter of 0.82".
- Center-to-center distance between the top knockouts: 1.97".
- Ground hole with a diameter of 0.2", located 3.01" from the left edge and 1.18" from the bottom edge.
- Bottom edge features a 1.63" wide section with a 0.08" deep cutout.
- Overall width at the bottom: 4.65".

Front View:

- Overall height: 10.97".
- Overall width: 4.65".
- Knockout diameter: 0.82".
- Knockout location: 1.89" from the left edge and 1.57" from the bottom edge.
- Knockout label: (1) 1/2" NPT Knockout Per Side.
- Knockout thread: M3.
- Knockout offset: 0.08".
- Knockout offset: 0.39".
- Knockout offset: 2.05".
- Knockout offset: 3.86".


Bottom View:

- Overall dimensions: 4.65" (width) x 3.86" (height).
- Four circular knockouts, each with a diameter of 0.98".
- Center-to-center distance between the knockouts: 2.32" (horizontal) and 2.09" (vertical).
- Knockout label: (4) 1/2" NPT Knockouts.

Connection Guide

1. Connect **X4** and **X3** together
2. Connect **X2** and **X1** together
3. Connect High Voltage **L1** to **X4**, **X3**
4. Connect Low Voltage **L1** to **X1**, **X2**, **H4**
5. Connect **H3** and **H2** together
6. Connect High & Low Voltage **L2** to **H1**

DIAGRAM C2

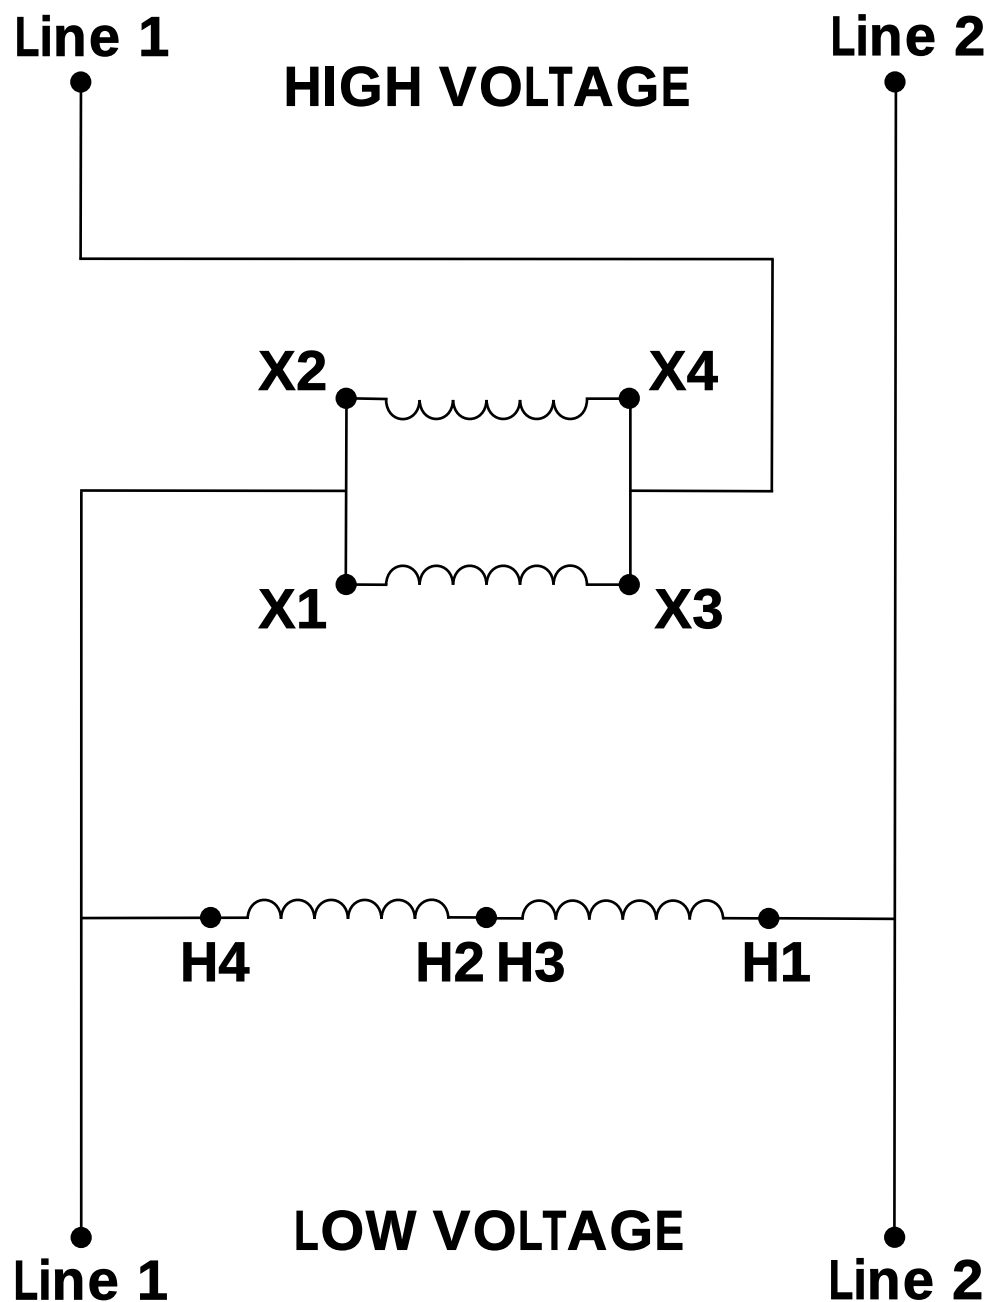



TX-BB-250V-234V-30A — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core