

Summary

Three-phase delta buck-boost transformer. Steps down 246V to 220V at 50 amps continuous output. 19.05 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 246V three phase building supply to 220V delta at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 220V that is installed on a 246V system experiencing overvoltage from the utility.

Configured as an open delta autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 50-amp buck-boost transformer is significantly smaller and lighter than a 50-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-246D-220D-50A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Delta (3-PH), AC	Transformer Type	Buck/Boost
Capacity	19.05 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	246V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	44.70A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	220V	Termination Access	(6) ¾" NPT Hubs
Secondary Amperage	50A	Winding Material	Aluminum
Maximum Primary OCP	60A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	68 lbs
Temperature Rise	115°C	Dimensions	14.25"-W x 6.5"-D x 11.75"-H

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Three-phase open delta installation — (2) enclosures required.




Connection Guide

1. Connect **X2** and **X3** together for both transformers
2. Connect **H2** and **H3** together for both transformers
3. Connect High Voltage **PHASE A** to **X4** on transformer A
4. Connect High Voltage **PHASE C** to **X4** on transformer B
5. Connect Low Voltage **PHASE A** to **H4** and **X1** on transformer A
6. Connect Low Voltage **PHASE C** to **H4** and **X1** on transformer B
7. Connect High & Low Voltage **PHASE B** to **H1**
8. Bridge **H1** connections between transformer A & B

DIAGRAM G2

HIGH VOLTAGE

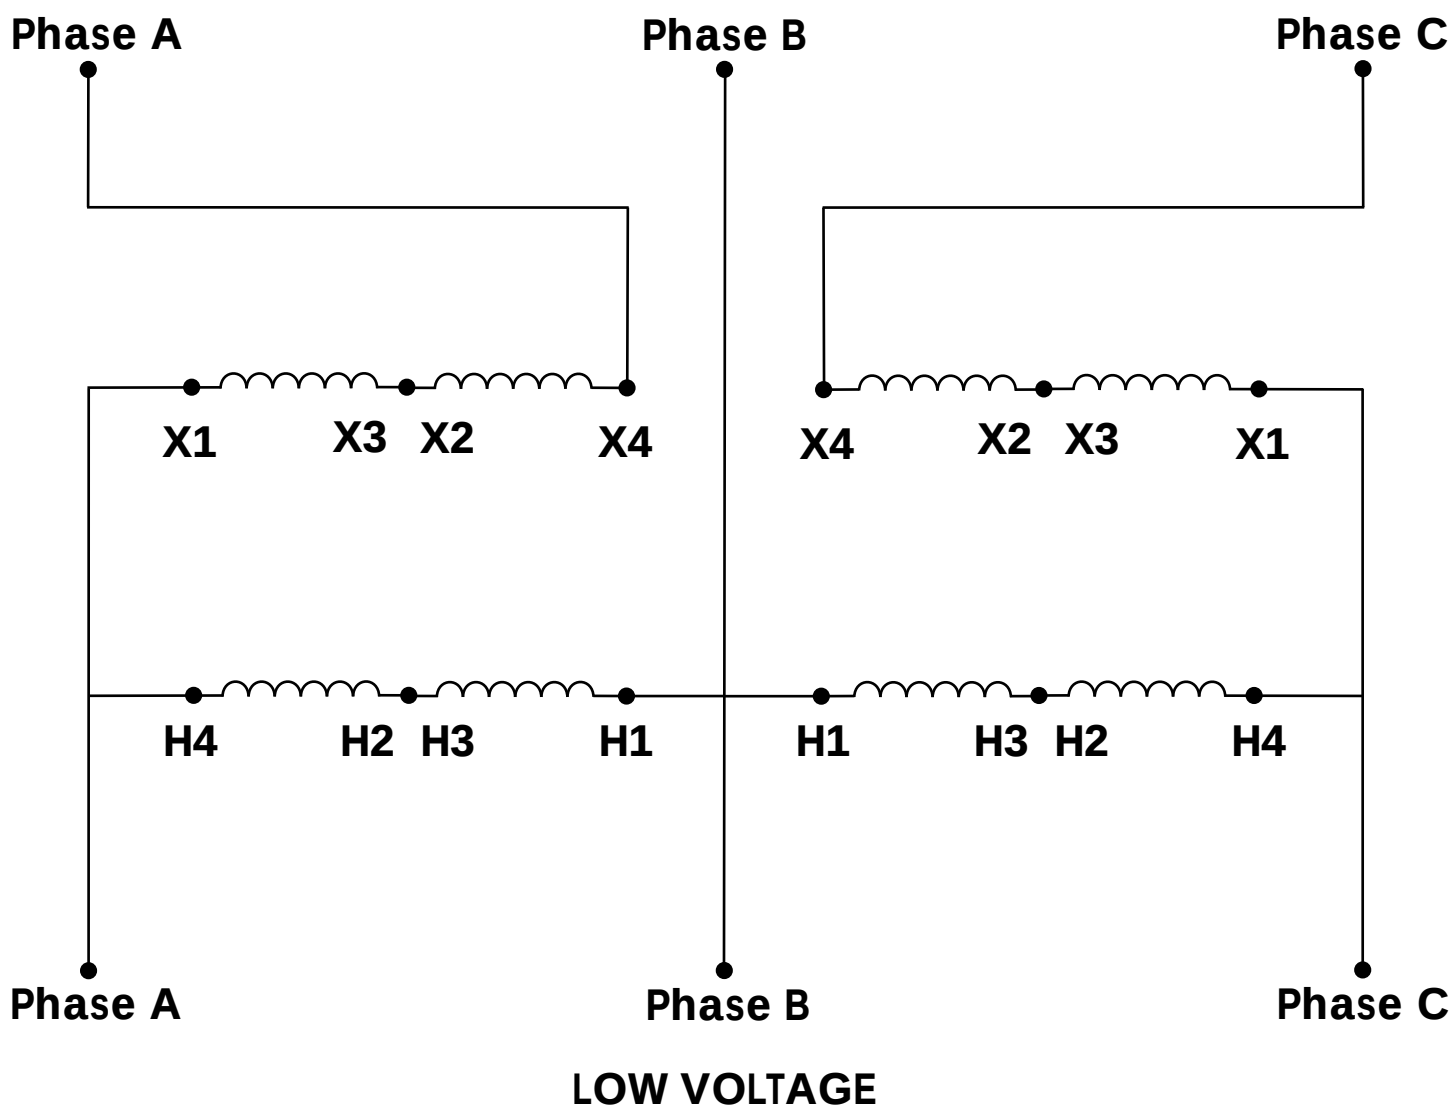



sales@sanzosales.com

The image shows two identical gray metal autotransformers standing side-by-side. Each unit has a label on the front with technical specifications and a warning label. The label on the left unit is for model TX-BB-246D-220D-50A and the label on the right unit is for model TX-BB-246D-220D-50A. Both units have a label with technical specifications and a warning label.

Left Unit Label:

SANZO SALES
TX-BB-246D-220D-50A

Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	240V	Max. VA:	45A
Output Voltage:	240V	Temperature:	40°C
Rated Power:	1.2 kW	Insulation:	100°C
Max. Input Voltage:	240V	Short-Circuit:	100V
Max. Output Voltage:	240V	Short-Circuit:	100V

Caution: Open 240V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size

Autotransformer

Right Unit Label:

SANZO SALES
TX-BB-246D-220D-50A

Phase:	Single Phase	Configuration:	Autotransformer
Input Voltage:	240V	Max. VA:	45A
Output Voltage:	240V	Temperature:	40°C
Rated Power:	1.2 kW	Insulation:	100°C
Max. Input Voltage:	240V	Short-Circuit:	100V
Max. Output Voltage:	240V	Short-Circuit:	100V

Caution: Open 240V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size
 Caution: 100V AC for Safety or Output Size

Autotransformer

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core