



### Summary

Single-phase buck-boost transformer. Steps down 260V to 218V at 10 amps continuous output. 2.18 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

### Product Description

This unit corrects a 260V building supply to 218V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 218V that is installed on a 260V system experiencing overvoltage.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 10-amp buck-boost transformer is significantly smaller and lighter than a 10-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-260V-218V-10A — NEMA 3R Encapsulated, cETLus Listed

### Specifications

|                     |                         |                       |                              |
|---------------------|-------------------------|-----------------------|------------------------------|
| Phase               | Single Phase (1-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 2.18 kVA                | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 260V                    | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 8.38A                   | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 218V                    | Termination Access    | (6) ½" NPT Hubs              |
| Secondary Amperage  | 10A                     | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 15A                     | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                   | Weight                | 17 lbs                       |
| Temperature Rise    | 115°C                   | Dimensions            | 4.65"-W x 3.86"-D x 9.25"-H  |

### Ratings & Certifications

- Listed for United States
  - NEMA 3R Indoor/Outdoor Enclosure
  - Built to UL-50 Standards
  - CE Certified
- Listed for Canada
  - Epoxy Resin Encapsulated
  - RoHS Compliant



### Common Applications

- HVAC & Minisplit
  - Loads CNC Machines
  - Pump Stations
  - Packaging Machines
- Commercial Kitchen Equipment
  - Motor Loads
  - EV Chargers
  - Server Racks & IT Equipment
- Refrigeration & Walk-in
  - Coolers Fans & Blowers
  - Conveyor Systems
  - Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Top, Front, and Bottom.

**Top View:** Dimensions are 4.77" (width) and 4.65" (length). It features a central ground hole (Ø 0.2") and four 1/2" NPT knockout holes. Key dimensions include 0.82", 3.15", 1.97", 5.32", 9.25", 3.01", 1.18", 0.08", 1.63", 0.86", 1.95", and 4.65".


**Front View:** Dimensions are 5.32" (width) and 9.25" (length). It shows a (1) 1/2" NPT knockout hole per side and an M3 screw. Key dimensions include 10.97", 9.25", 1.89", 4.17", 1.57", 0.39", 0.08", 2.05", 3.86", and 3.94".

**Bottom View:** Dimensions are 4.65" (width) and 3.86" (length). It shows four 1/2" NPT knockout holes. Key dimensions include 1.16", 2.32", 2.09", and 0.98".

## Connection Guide

1. Connect **X2** and **X3** together
2. Connect High Voltage **L1** to **X4**
3. Connect Low Voltage **L1** to **X1**, **H4**, **H3**
4. Connect High & Low Voltage **L2** to **H1** and **H2**

### DIAGRAM B2

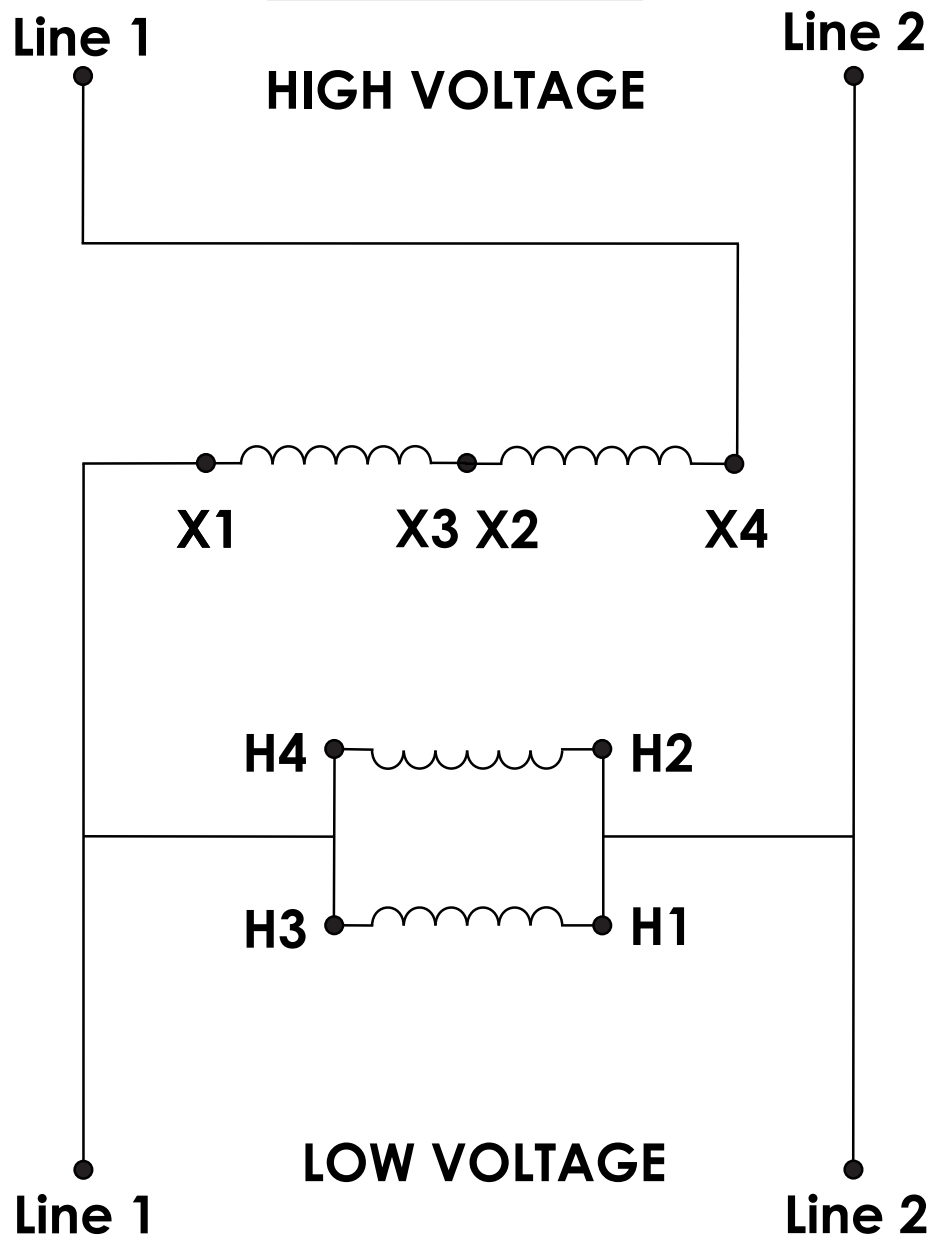



TX-BB-260V-218V-10A — NEMA 3R Encapsulated, cETLus Listed



*Base Knockouts — (4) ¾" NPT*



*Side View*



*Rear View — Surface Mount Bracket*



*Wiring Compartment — Terminal Leads*





*Interior — Epoxy Resin Encapsulated Core*