



Summary

Single-phase buck-boost transformer. Steps down 277V to 265V at 28.3 amps continuous output. 7.5 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 277V building supply to 265V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 265V that is installed on a 277V system experiencing overvoltage.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 28.3-amp buck-boost transformer is significantly smaller and lighter than a 28.3-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-277V-265V-7.5KVA — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Single Phase (1-PH), AC	Transformer Type	Buck/Boost
Capacity	7.5 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	277V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	27.08A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	265V	Termination Access	(6) ½" NPT Hubs
Secondary Amperage	28.3A	Winding Material	Aluminum
Maximum Primary OCP	40A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	14 lbs
Temperature Rise	115°C	Dimensions	4.65"-W x 3.86"-D x 9.25"-H

Ratings & Certifications

- Listed for United States
 - NEMA 3R Indoor/Outdoor Enclosure
 - Built to UL-50 Standards
 - CE Certified
- Listed for Canada
 - Epoxy Resin Encapsulated
 - RoHS Compliant



Common Applications

- HVAC & Minisplit
 - Loads CNC Machines
 - Pump Stations
 - Packaging Machines
- Commercial Kitchen Equipment
 - Motor Loads
 - EV Chargers
 - Server Racks & IT Equipment
- Refrigeration & Walk-in
 - Coolers Fans & Blowers
 - Conveyor Systems
 - Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.



Technical drawing of the Bottom (Underside) Plate, showing three views: Top, Front, and Bottom.

Top View: Dimensions are 4.77" (width) and 4.65" (length). It features a central ground hole (Ø 0.2") and four 1/2" NPT knockout holes. Key dimensions include 3.15", 1.97", 0.82", 5.32", 9.25", 3.01", 1.18", 0.08", 1.63", 0.86", 1.95", and 4.65".

Front View: Dimensions are 5.32" (width) and 9.25" (length). It shows a (1) 1/2" NPT Knockout Per Side and an M3 screw. Key dimensions include 10.97", 9.25", 1.89", 4.17", 1.57", 0.39", 0.08", 2.05", 3.86", and 3.94".


Bottom View: Dimensions are 4.65" (width) and 3.86" (length). It shows four 1/2" NPT knockout holes. Key dimensions include 1.16", 2.32", 2.09", and 0.98".

Labels: (1) 1/2" NPT Knockout Per Side, M3, (4) 1/2" NPT, Ground hole, Bottom (Underside) Plate.

Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

DIAGRAM D2

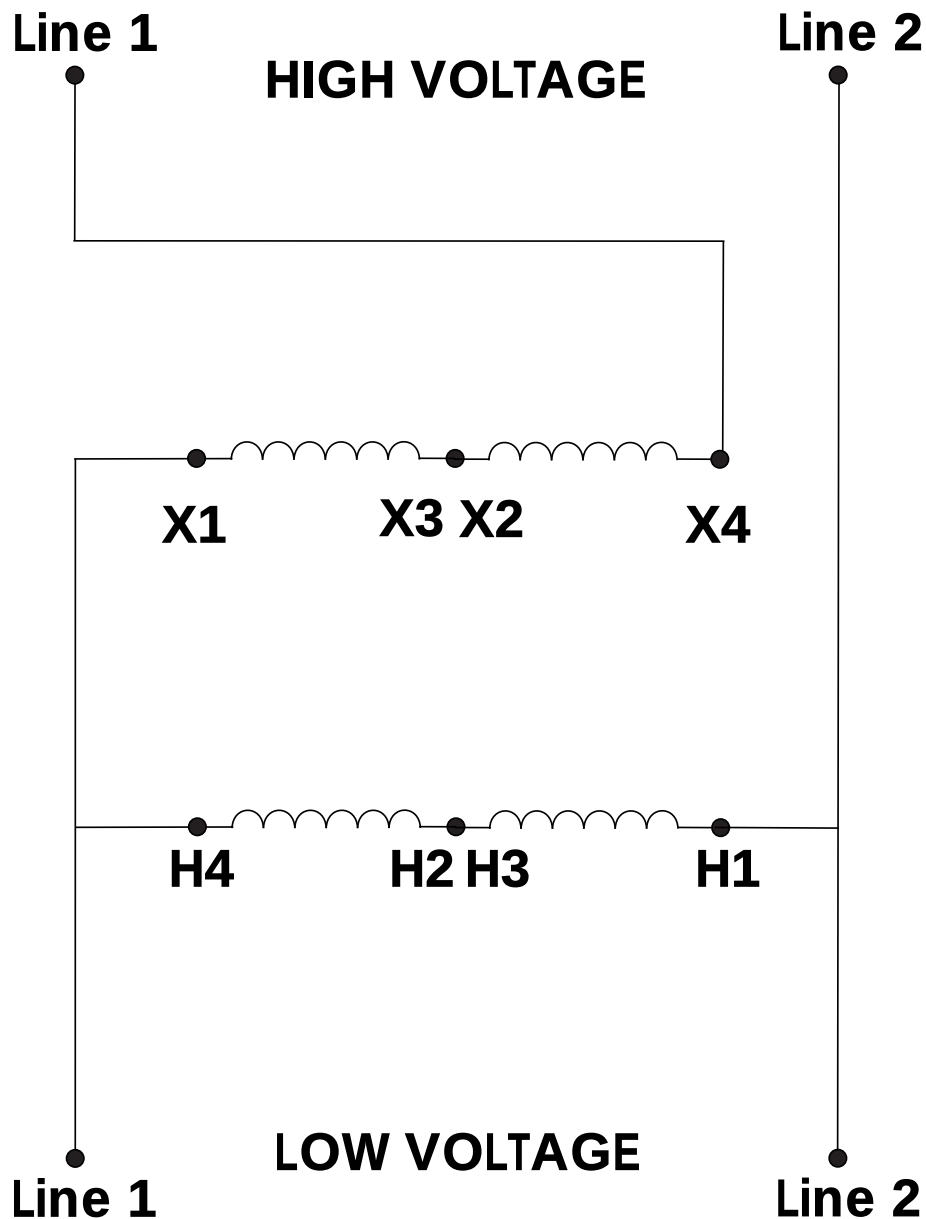



TX-BB-277V-265V-7.5KVA — NEMA 3R Encapsulated, cETLus Listed



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core