

Summary

Three-phase wye buck-boost transformer. Steps down 419V to 380V at 60 amps continuous output. 39.49 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

Product Description

This unit corrects a 419V three phase building supply to 380V wye at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 380V that is installed on a 419V system experiencing overvoltage from the utility.

Configured as a wye autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 60-amp buck-boost transformer is significantly smaller and lighter than a 60-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-419Y-380Y.220-60A — NEMA 3R Encapsulated, cETLus Listed

Specifications

Phase	Three Phase Wye (3-PH), AC	Transformer Type	Buck/Boost
Capacity	39.49 kVA	Configuration	Encapsulated Autotransformer
Primary Voltage	419V	Primary Termination	Lead Wires & Terminal Lugs
Primary Amperage	54.40A	Secondary Termination	Lead Wires & Terminal Lugs
Secondary Voltage	380V	Termination Access	(6) 3/4" NPT Hubs
Secondary Amperage	60A	Winding Material	Aluminum
Maximum Primary OCP	70A	Enclosure Material	Steel
Frequency	50/60 Hz	Finish Color	ANSI 70 Light Grey
Insulation	180°C	Weight	102 lbs
Temperature Rise	115°C	Dimensions	5.43 x 4.49 x 10.87

Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

Important: Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

Dimensions

Three-phase wye installation — (3) enclosures required.

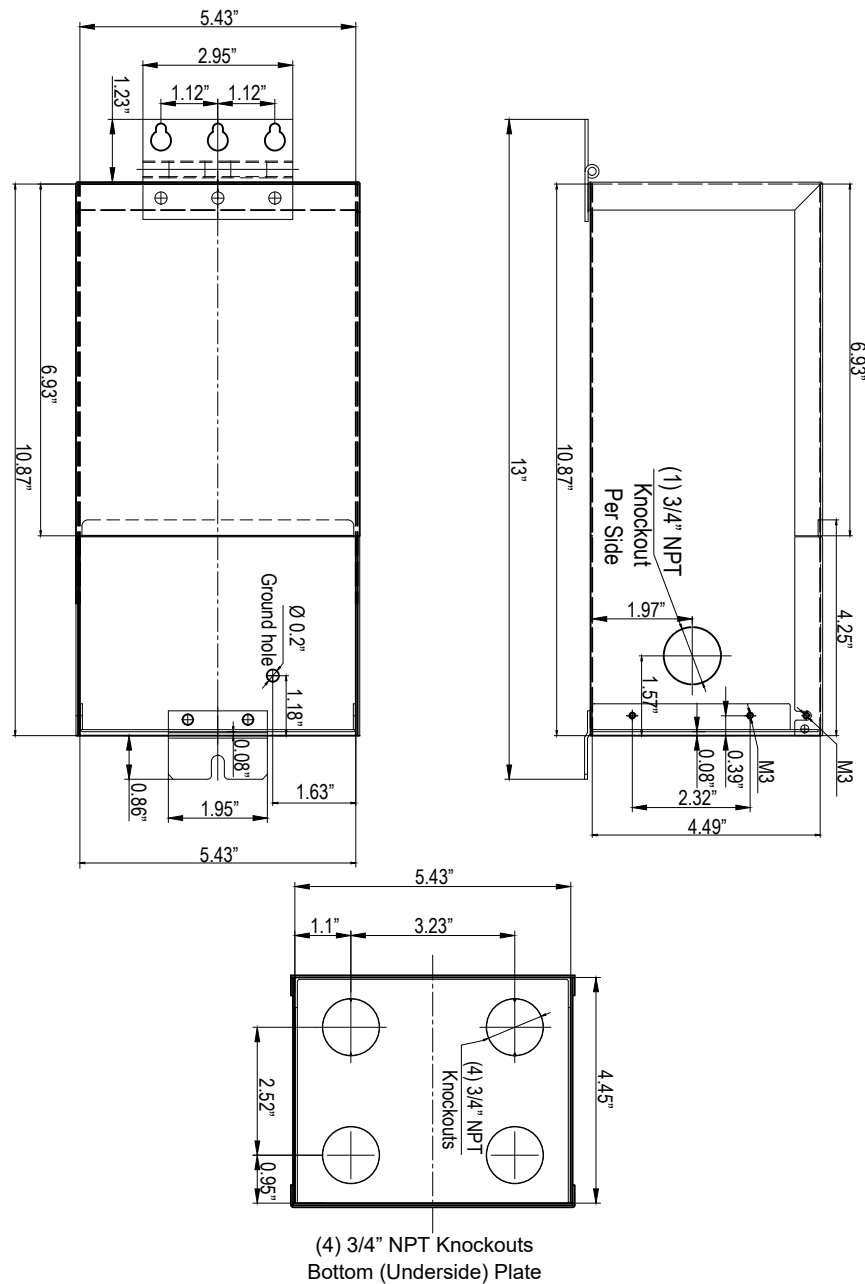


Connection Guide

1. Connect **X4** and **X3** together for each transformer
2. Connect High Voltage **PHASE A** to **X4** and **X3** on transformer 1
3. Connect High Voltage **PHASE B** to **X4** and **X3** on transformer 2
4. Connect High Voltage **PHASE C** to **X4** and **X3** on transformer 3
5. Connect **X2** and **X1** together for each transformer
6. Connect Low Voltage **PHASE A** to **X1**, **X2**, **H4**, **H3** on transformer 1
7. Connect Low Voltage **PHASE B** to **X1**, **X2**, **H4**, **H3** on transformer 2
8. Connect Low Voltage **PHASE C** to **X1**, **X2**, **H4**, **H3** on transformer 3
9. Connect **NEUTRAL** to **H1** and **H2**
10. Bridge **H1** and **H2** connections between ALL transformers

DIAGRAM J2

HIGH VOLTAGE

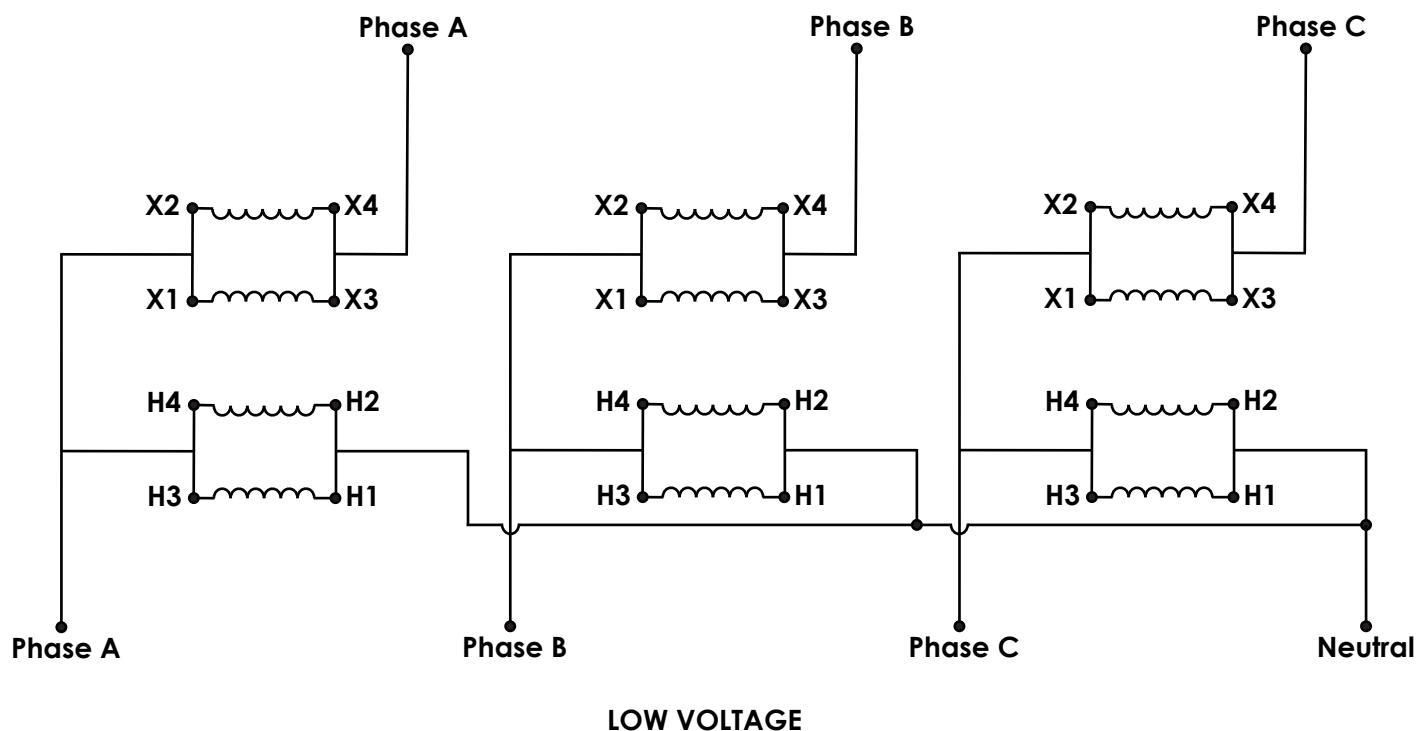



sales@sanzosales.com

The image shows three identical grey metal autotransformers standing side-by-side. Each unit has a top-mounted terminal block with three screw terminals. The front of each unit features a white label with the Sanzo Sales logo and technical specifications. The label for the middle unit is clearly legible and includes the following information:

SANZO SALES
TX-BB-208Y-240Y-40A

Phase	Single Phase	Configuration	Apparent Power
Input Voltage	208Y	4:1	400 VA
Output Voltage	240Y	Stepdown	400 VA
Rated Current	10 A	10 A	10 A
Max Input Range	208V	208V	208V
Max Output Range	240V	240V	240V

Autotransformer

Sanzo Sales, Inc. 1000 E. 10th St. Suite 100
 Denver, CO 80202
 Phone: (303) 733-1111
 Fax: (303) 733-1112
 Email: sales@sanzo.com

sales@sanzosales.com



Base Knockouts — (4) ¾" NPT



Side View



Rear View — Surface Mount Bracket



Wiring Compartment — Terminal Leads



Interior — Epoxy Resin Encapsulated Core