

### Summary

Single-phase buck-boost transformer. Steps up 436V to 480V at 30 amps continuous output. 14.4 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

### Product Description

This unit corrects a 436V building supply to 480V at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 480V that is installed on a 436V system.

Wired as an autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 30-amp buck-boost transformer is significantly smaller and lighter than a 30-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-436V-480V-30A — NEMA 3R Encapsulated, cETLus Listed

### Specifications

|                     |                         |                       |                              |
|---------------------|-------------------------|-----------------------|------------------------------|
| Phase               | Single Phase (1-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 14.4 kVA                | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 436V                    | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 33.00A                  | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 480V                    | Termination Access    | (6) ¾" NPT Hubs              |
| Secondary Amperage  | 30A                     | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 50A                     | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                   | Weight                | 34 lbs                       |
| Temperature Rise    | 115°C                   | Dimensions            | 5.43 x 4.49 x 10.87          |

### Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-50 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant



### Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors


**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

[illegible]

## Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

### DIAGRAM D2

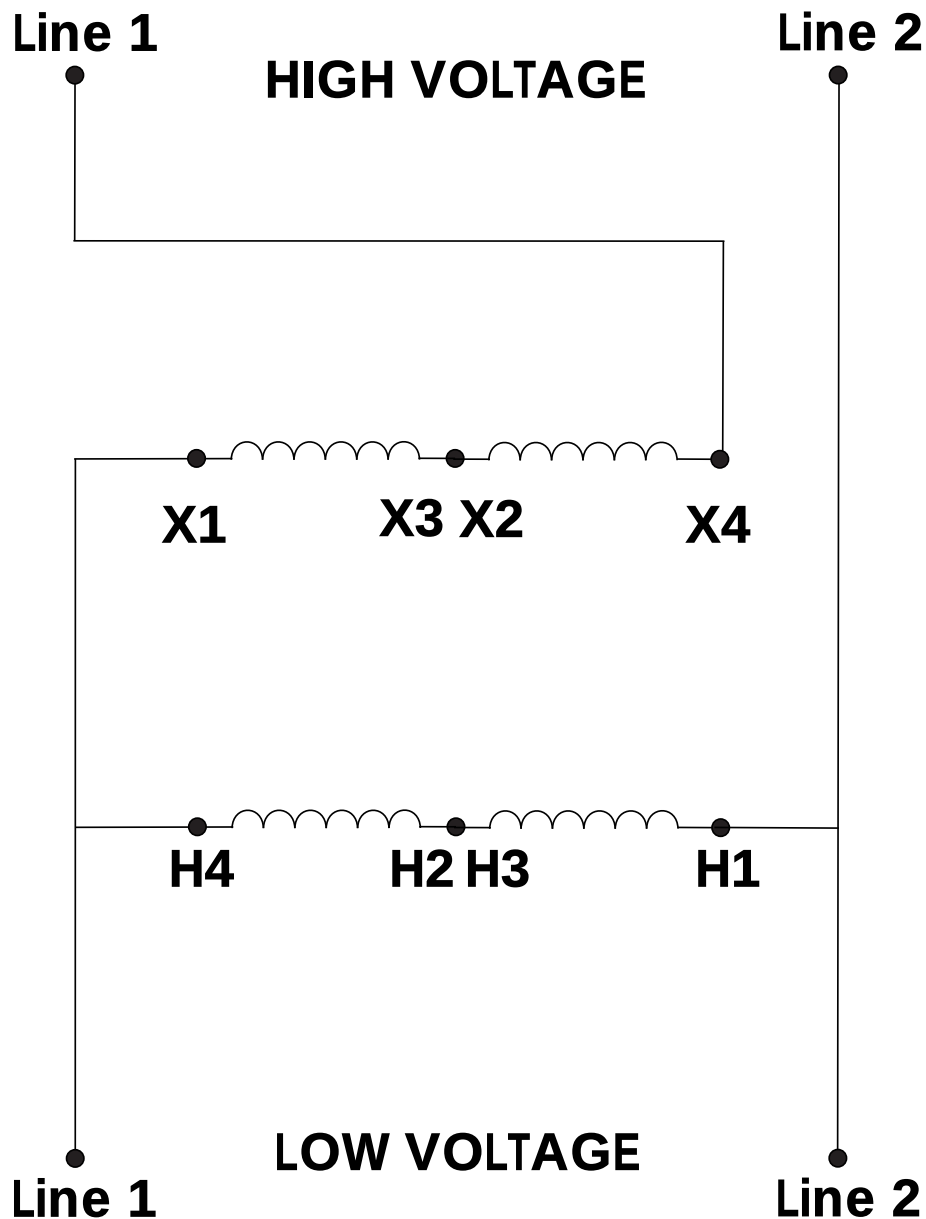



TX-BB-436V-480V-30A — NEMA 3R Encapsulated, cETLus Listed



*Base Knockouts — (4) ¾" NPT*



*Side View*



*Rear View — Surface Mount Bracket*



*Wiring Compartment — Terminal Leads*





*Interior — Epoxy Resin Encapsulated Core*