

### Summary

Three-phase wye buck-boost transformer. Steps down 442V to 415V at 90 amps continuous output. 64.69 kVA capacity. NEMA 3R enclosed, cETLus listed, wall mount.

### Product Description

This unit corrects a 442V three phase building supply to 415V wye at the point of use, permanently, without modifying the building's electrical service. Designed for equipment rated 415V that is installed on a 442V system experiencing overvoltage from the utility.

Configured as a wye autotransformer, the unit handles only the difference between input and output and not the full load. This is why a 90-amp buck-boost transformer is significantly smaller and lighter than a 90-amp isolation transformer. The encapsulated core construction eliminates audible hum and provides stable thermal performance under continuous duty.

Features a removable wiring compartment door, removable knockout plate, and six NPT knockouts for flexible conduit entry. Surface mounting bracket for easy wall mount installations.



TX-BB-442Y-415Y.240-90A — NEMA 3R Encapsulated, cETLus Listed

### Specifications

|                     |                            |                       |                              |
|---------------------|----------------------------|-----------------------|------------------------------|
| Phase               | Three Phase Wye (3-PH), AC | Transformer Type      | Buck/Boost                   |
| Capacity            | 64.69 kVA                  | Configuration         | Encapsulated Autotransformer |
| Primary Voltage     | 442V                       | Primary Termination   | Lead Wires & Terminal Lugs   |
| Primary Amperage    | 84.50A                     | Secondary Termination | Lead Wires & Terminal Lugs   |
| Secondary Voltage   | 415V                       | Termination Access    | (6) 3/4" NPT Hubs            |
| Secondary Amperage  | 90A                        | Winding Material      | Aluminum                     |
| Maximum Primary OCP | 110A                       | Enclosure Material    | Steel                        |
| Frequency           | 50/60 Hz                   | Finish Color          | ANSI 70 Light Grey           |
| Insulation          | 180°C                      | Weight                | 102 lbs                      |
| Temperature Rise    | 115°C                      | Dimensions            | 5.43 x 4.49 x 10.87          |

### Ratings & Certifications

- Listed for United States
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL-5085 Standards
- CE Certified
- Listed for Canada
- Epoxy Resin Encapsulated
- RoHS Compliant




### Common Applications

- HVAC & Minisplit
- Loads CNC Machines
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Refrigeration & Walk-in
- Coolers Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important:** Buck-boost transformers applied as autotransformers do not provide circuit isolation and do not create a neutral. Contact us if your application requires isolation or neutral creation.

## Dimensions

Three-phase wye installation — (3) enclosures required.

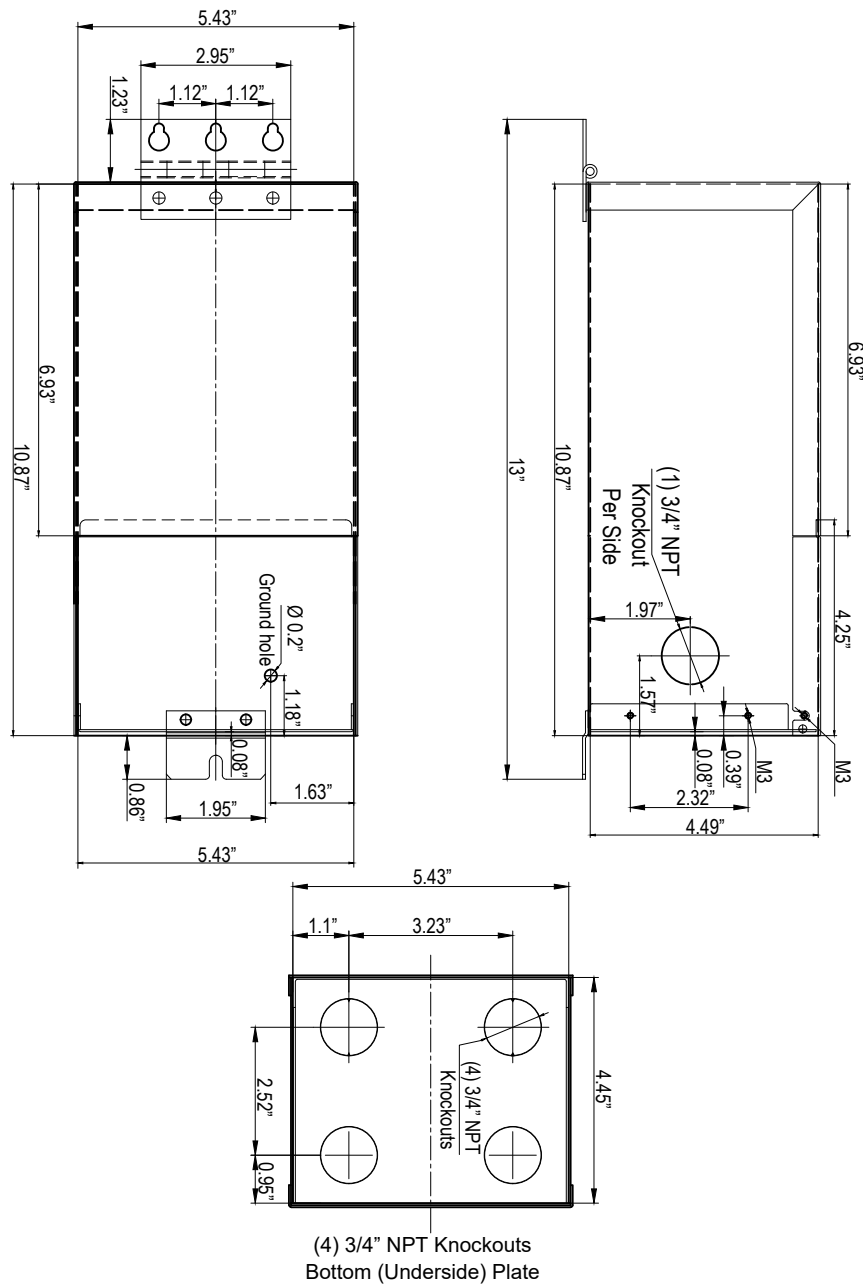


## Connection Guide

1. Connect **X2** and **X3** together for each transformer
2. Connect High Voltage **PHASE A** to **X4** on transformer 1
3. Connect High Voltage **PHASE B** to **X4** on transformer 2
4. Connect High Voltage **PHASE C** to **X4** on transformer 3
5. Connect Low Voltage **PHASE A** to **X1**, **H4**, **H3** on transformer 1
6. Connect Low Voltage **PHASE B** to **X1**, **H4**, **H3** on transformer 2
7. Connect Low Voltage **PHASE C** to **X1**, **H4**, **H3** on transformer 3
8. Connect **NEUTRAL** to **H1** and **H2**
9. Bridge **H1** connections between ALL transformers

**DIAGRAM I2**

HIGH VOLTAGE

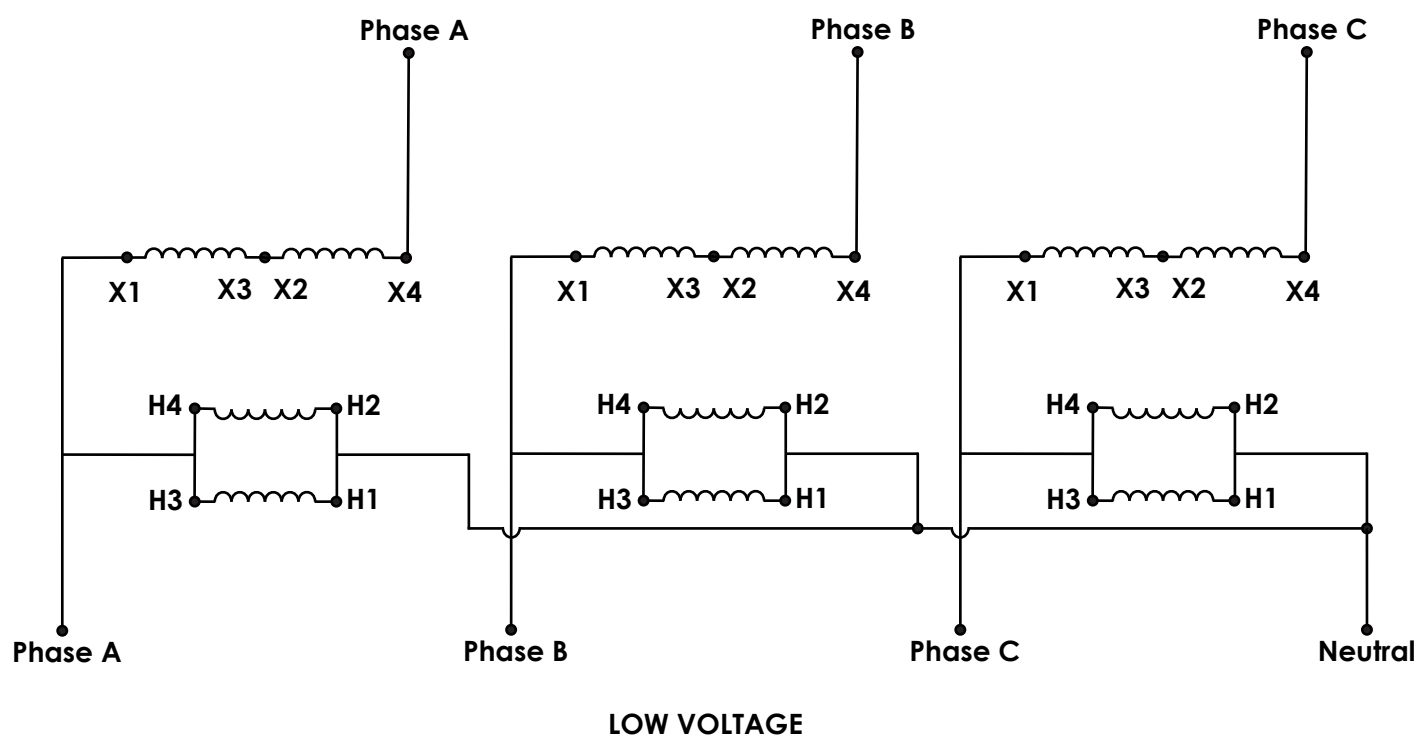



sales@sanzosales.com

The image shows three identical Sanzo Sales autotransformers, model TX-BB-208Y-240Y-40A, arranged side-by-side. Each unit is a light gray, rectangular metal enclosure with a hinged top cover. The front of each unit features a white label with technical specifications and a logo. The label includes the Sanzo Sales logo, the model number, and a table of electrical ratings. The units are designed for industrial or commercial use, providing a 208V primary and 240V secondary output with a 40A capacity.

**Label Information:**

**SANZO SALES**  
**TX-BB-208Y-240Y-40A**

| Rating           | Single Phase | Configuration | Approximate |
|------------------|--------------|---------------|-------------|
| Input Voltage    | 208V         | WYE           | 40A         |
| Output Voltage   | 240V         | DELTA         | 40A         |
| Rated Power      | 9.6 KVA      | 100%          | 100%        |
| Max Input Range  | 20.8V        | 100%          | 100%        |
| Max Output Range | 24.0V        | 100%          | 100%        |

**Autotransformer**

**ETL**  
 LISTED  
 CONFORMS TO UL 516-100-100-1  
 LISTED TO CAN/CSA 286-1

**sales@sanzosales.com**



Base Knockouts — (4)  $\frac{3}{4}$ " NPT



*Side View*



*Rear View — Surface Mount Bracket*



Wiring Compartment — Terminal Leads



*Interior — Epoxy Resin Encapsulated Core*