




■ PRIMARY J-TAP SCHEDULE

Position	Primary voltage	From nominal	Setting
1	14,400V	0.00%	Nominal
2	13,800V	-4.17%	Below nominal
3	13,200V	-8.33%	Below nominal
4	12,700V	-11.81%	Below nominal
5	12,470V	-13.40%	Below nominal
6	12,000V	-16.67%	Below nominal
7	11,700V	-18.75%	Below nominal


0 above / 6 below nominal; 7 positions. Tap percentages reference the selected nominal primary voltage.

De-energize the transformer before operating the tap changer.

■ WINDING CONNECTIONS



14400V delta

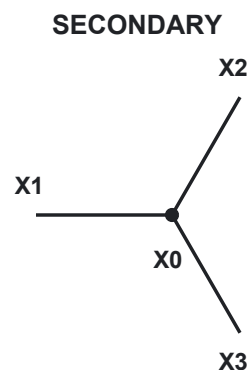

480Y/277

Vector group: Dyn1. Secondary X0 is the neutral. Primary H terminals receive the medium-voltage supply.

Connection symbols show winding arrangement. Use the unit connection plate for terminal location and installation.