




■ PRIMARY J-TAP SCHEDULE

Position	Primary voltage	From nominal	Setting
1	14,400V	+15.48%	Above nominal
2	13,800V	+10.67%	Above nominal
3	13,200V	+5.85%	Above nominal
4	12,700V	+1.84%	Above nominal
5	12,470V	0.00%	Nominal
6	12,000V	-3.77%	Below nominal
7	11,700V	-6.17%	Below nominal


4 above / 2 below nominal; 7 positions. Tap percentages reference the selected nominal primary voltage.

De-energize the transformer before operating the tap changer.

■ WINDING CONNECTIONS



12470V delta

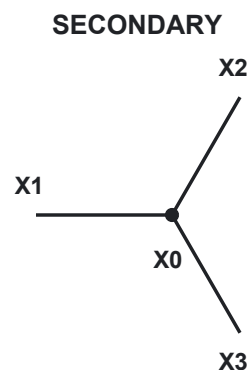

480Y/277

Vector group: Dyn1. Secondary X0 is the neutral. Primary H terminals receive the medium-voltage supply.

Connection symbols show winding arrangement. Use the unit connection plate for terminal location and installation.