

Diagram D2 | 211 V input to 240 V nominal output


Single phase | Primary series / secondary series | Boost

Continuous output rating: 3.47 A | Calculated output: 239.13 V

1. Join X2 and X3 on each unit.
2. Join H2 and H3 on each unit.
3. Connect 240 V OUTPUT L1 to X4 on Unit 1.
4. Connect 211 V INPUT L1 to X1 and H4 on Unit 1.
5. Connect INPUT and OUTPUT L2 to H1 on Unit 1.

BASE: 1 x TX-B2-015H-124210 | 150 VA each

Use this diagram only with 120/240 V primary / 16/32 V secondary.

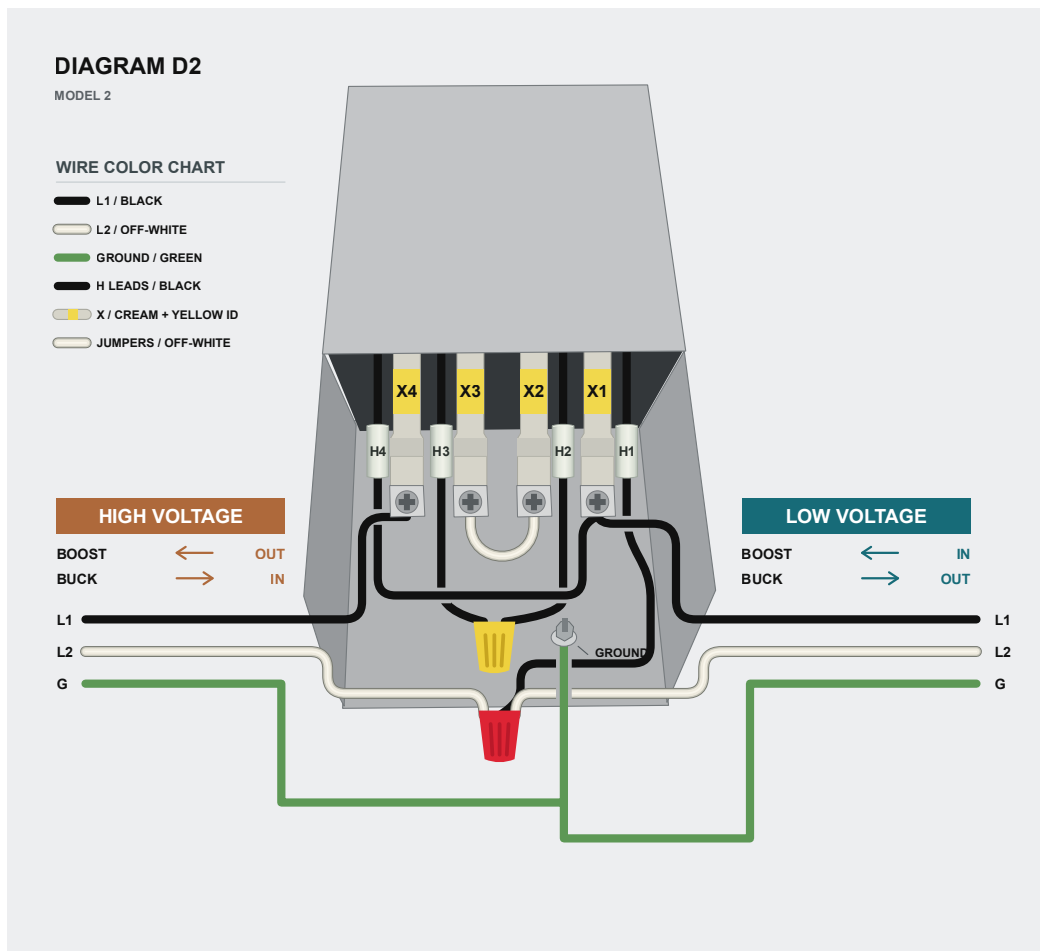

Drawing: LOW VOLTAGE = 211 V INPUT; HIGH VOLTAGE = 240 V OUTPUT.

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.