


## Connection Guide

1. Connect **X4** and **X3** together for each transformer
2. Connect **X2** and **X1** together for each transformer
3. Connect High Voltage **PHASE A** to **X4**, **X3** on transformer A
4. Connect High Voltage **PHASE C** to **X4**, **X3** on transformer B
5. Connect Low Voltage **PHASE A** to **X1**, **X2**, **H4** on transformer A
6. Connect Low Voltage **PHASE C** to **X1**, **X2**, **H4** on transformer B
7. Connect **H2** and **H3** together for each transformer
8. Connect High & Low Voltage **PHASE B** to **H1**
9. Bridge **H1** connections between Transformer A & B

### DIAGRAM H2

#### HIGH VOLTAGE

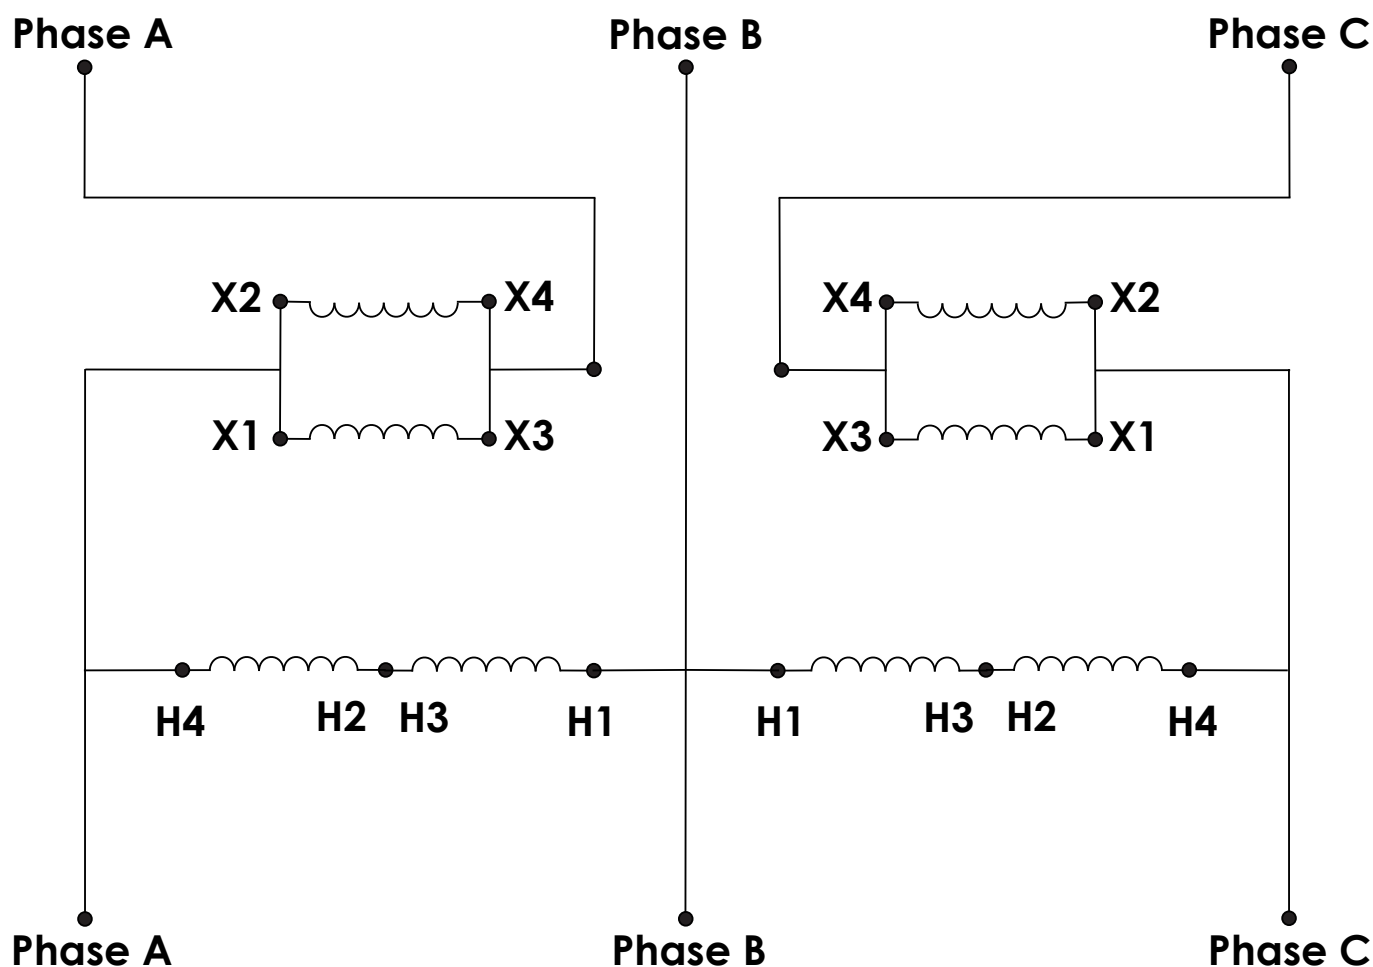

#### LOW VOLTAGE