

Diagram D2 | 240 V input to 276 V nominal output


Single phase | Primary series / secondary series | Boost

Continuous output rating: 3.02 A | Calculated output: 272.00 V

1. Join X2 and X3 on each unit.
2. Join H2 and H3 on each unit.
3. Connect 276 V OUTPUT L1 to X4 on Unit 1.
4. Connect 240 V INPUT L1 to X1 and H4 on Unit 1.
5. Connect INPUT and OUTPUT L2 to H1 on Unit 1.

BASE: 1 x TX-B1-010H-124210 | 100 VA each

Use this diagram only with 120/240 V primary / 16/32 V secondary.

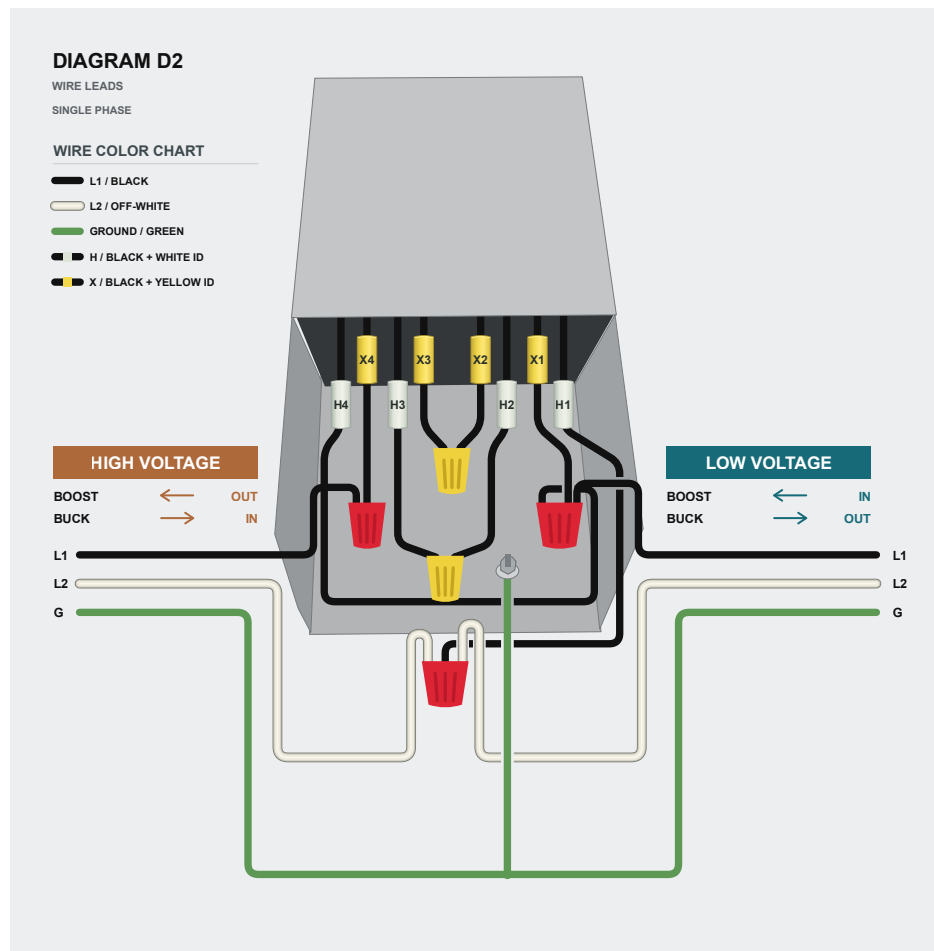

Drawing: LOW VOLTAGE = 240 V INPUT; HIGH VOLTAGE = 276 V OUTPUT.

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.