

Diagram B2 | 246 V input to 208 V nominal output


Single phase | Primary parallel / secondary series | Buck

Continuous output rating: 5.88 A | Calculated output: 205.00 V

1. Join X2 and X3 on each unit.
2. Connect 246 V INPUT L1 to X4 on Unit 1.
3. Connect 208 V OUTPUT L1 to X1 and H4 and H3 on Unit 1.
4. Connect INPUT and OUTPUT L2 to H1 and H2 on Unit 1.

BASE: 1 x TX-B2-025H-115216 | 250 VA each

Use this diagram only with 240/480 V primary / 24/48 V secondary.

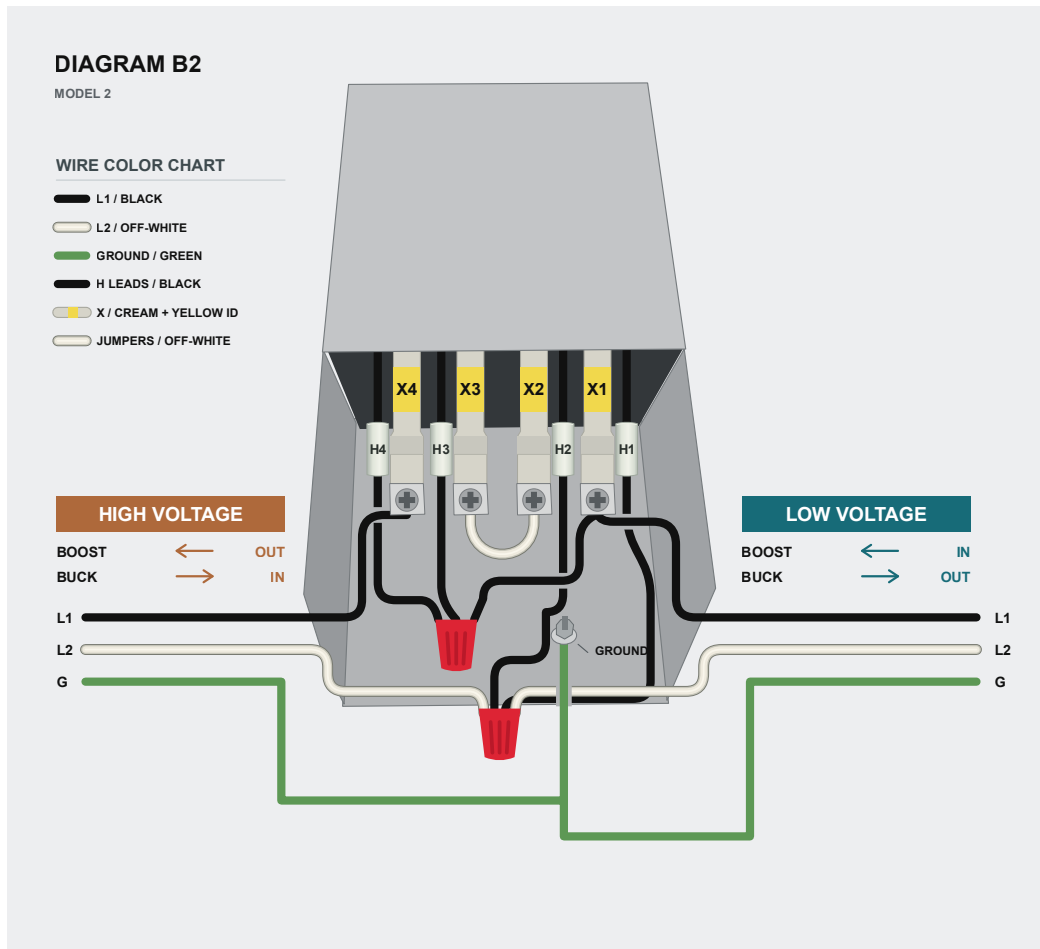

Drawing: LOW VOLTAGE = 208 V OUTPUT; HIGH VOLTAGE = 246 V INPUT.

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.