

### Summary

Single-phase encapsulated general purpose transformer. 5 KVA capacity. 190/200/208/220 x 380/400/415/440V primary, 110/220V secondary. Resin encapsulated, NEMA 3R indoor/outdoor enclosure. ETL Listed for US and Canada, wall mount.

### Product Description

This single-phase encapsulated general purpose transformer delivers safe, isolated power for commercial, industrial, and OEM applications. Rated at 5 KVA with a 190/200/208/220 x 380/400/415/440V primary and 110/220V secondary, it supplies lighting, appliance, machine-tool, and distribution loads from a fully isolated secondary.

The encapsulated core-and-coil construction uses epoxy resin potting to seal out moisture, reduce audible hum, and provide reliable thermal performance under continuous duty. Aluminum windings with a 180 deg C insulation class and 115 deg C rise ensure long service life.

Housed in a NEMA 3R rated steel enclosure in ANSI 61 grey, it features 3/4" NPT knockouts and a surface mounting bracket for indoor or outdoor wall mount. The secondary is fully isolated for a separately derived system per NEC 250.30. Copper windings available on request.



TX-A4-050K-165128 - NEMA 3R Encapsulated, ETL Listed

### Specifications

| Specification       | Value                              | Specification         | Value                  |
|---------------------|------------------------------------|-----------------------|------------------------|
| Phase               | Single Phase (1-PH), AC            | Transformer Type      | General Purpose        |
| Capacity            | 5 KVA                              | Configuration         | Encapsulated Isolation |
| Primary Voltage     | 190/200/208/220 x 380/400/415/440V | Primary Termination   | Lead Wires             |
| Secondary Voltage   | 110/220V                           | Secondary Termination | Lead Wires             |
| Frequency           | 50/60 Hz                           | Termination Access    | Front Access Cover     |
| Insulation          | 180 deg C                          | Winding Material      | Aluminum               |
| Temperature Rise    | 115 deg C                          | Enclosure Material    | Steel                  |
| Maximum Primary OCP | 35A                                | Finish Color          | ANSI 61 Grey           |
| Wiring Knockouts    | (6) 3/4" NPT                       | Weight                | 132 lbs                |
| Dimensions          | 11.02"W x 10.63"D x 15.75"H        | Mounting              | Wall / Surface         |

### Ratings & Certifications

- Listed for United States
- Listed for Canada
- NEMA 3R Indoor/Outdoor Enclosure
- Built to UL 1561 Standards
- CE Certified
- Epoxy Resin Encapsulated
- RoHS Compliant
- Separately Derived System
- Copper Windings Available




### Common Applications

- HVAC & Refrigeration
- CNC & Machine Tools
- Pump Stations
- Packaging Machines
- Commercial Kitchen Equipment
- Motor Loads
- EV Chargers
- Server Racks & IT Equipment
- Lighting Loads
- Fans & Blowers
- Conveyor Systems
- Overhead Doors

**Important: Made to order; standard lead time applies. Specifications are typical and subject to change without notice. Confirm voltage, capacity, and enclosure dimensions before ordering. Contact Sanzo Power for a quote.**


## Dimensions

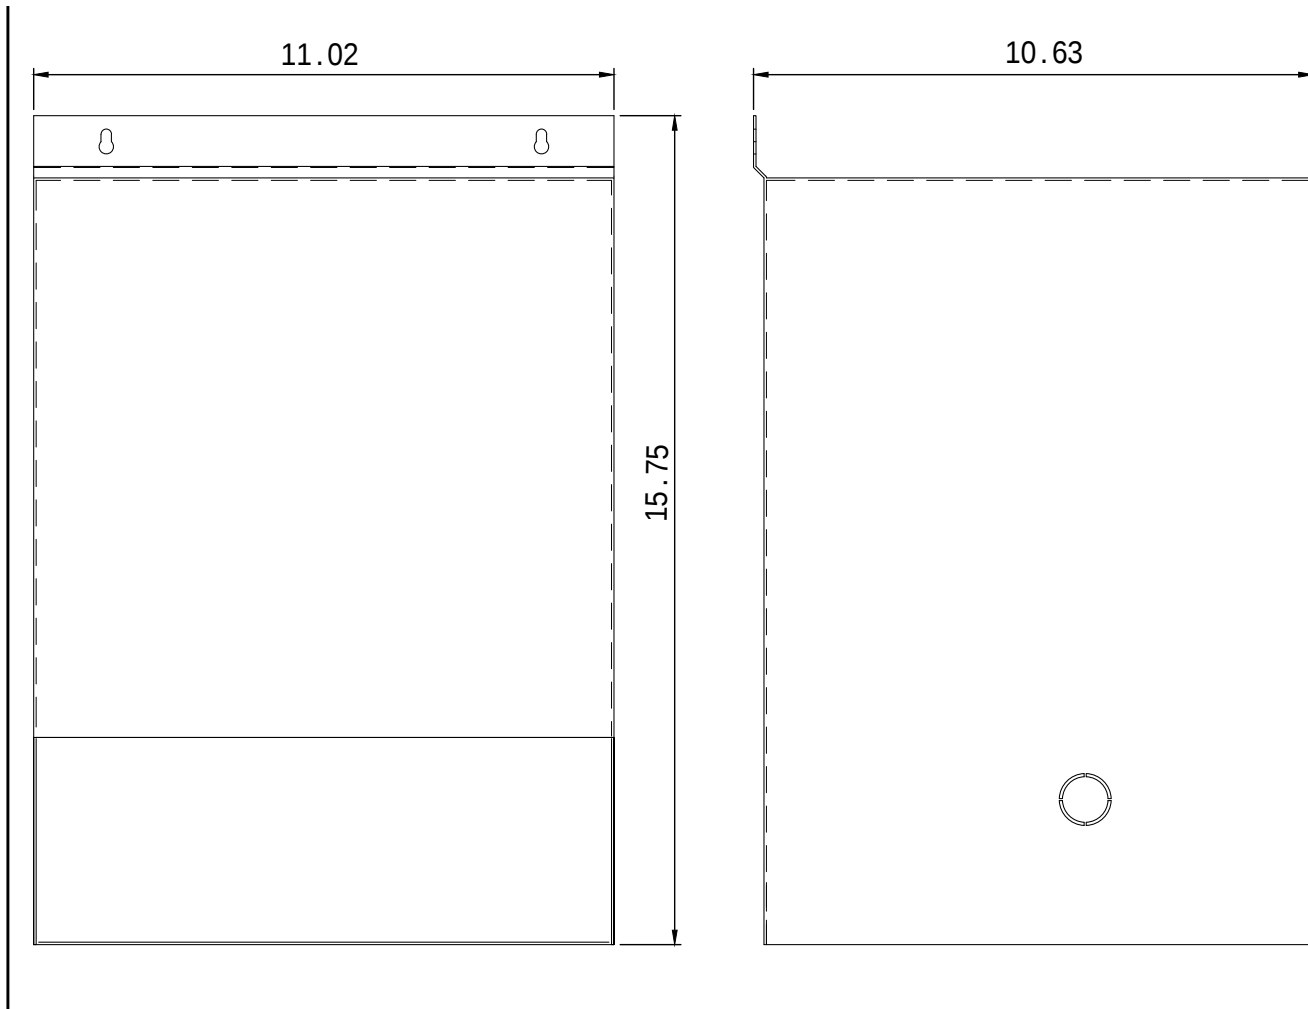

## Wiring Diagram

### Diagram GP105

Multi-Tap Primary / Dual Secondary

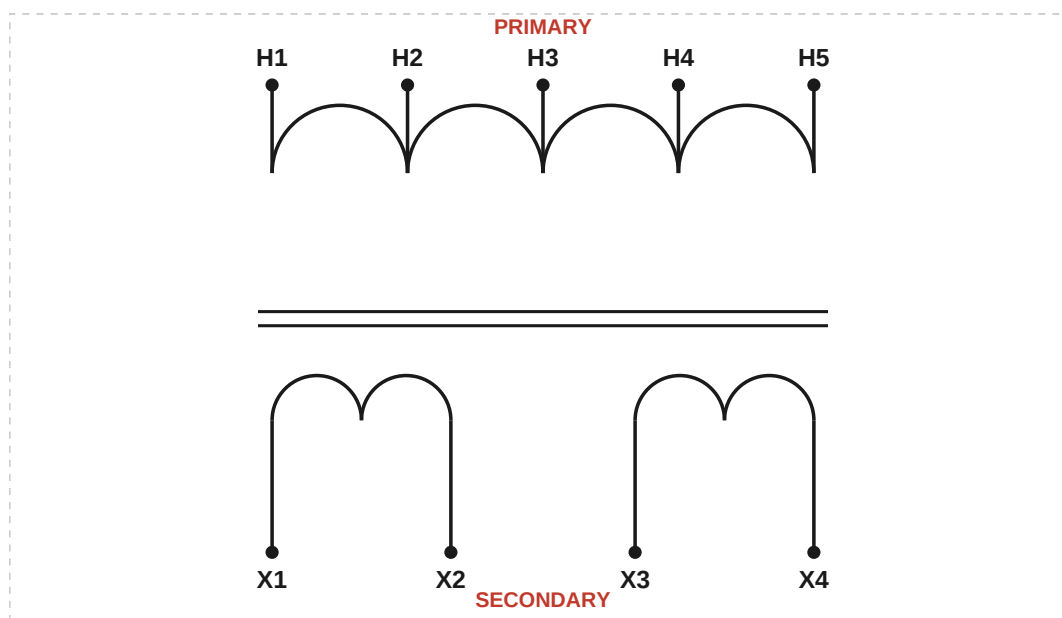

This multi-tap primary / dual secondary transformer provides an isolated 110/220V secondary from a 190/200/208/220 x 380/400/415/440V primary. Connect the line supply to primary terminals H1-H5 and take the load from secondary terminals X1-X4.

- Primary: 190/200/208/220 x 380/400/415/440V across H1-H5 - install supplied jumpers/links per nameplate
- Secondary: 110/220V across X1-X4
- Provide overcurrent protection and grounding per NEC Article 450 and 250.30



*TX-A4-050K-165128 - NEMA 3R Encapsulated General Purpose Transformer, ETL Listed*



*TX-A4-050K-165128 - Rear View - Mounting Bracket & Knockouts*



*TX-A4-050K-165128 - Side View - Enclosure Profile*



TX-A4-050K-165128 - Wiring Compartment - Primary & Secondary Leads



*TX-A4-050K-165128 - Interior View - Core, Coil & Lead Terminations*