

## Diagram B2 | 277 V input to 230 V nominal output


Single phase | Primary parallel / secondary series | Buck

**Continuous output rating: 3.62 A | Calculated output: 230.83 V**

1. Join X2 and X3 on each unit.
2. Connect 277 V INPUT L1 to X4 on Unit 1.
3. Connect 230 V OUTPUT L1 to X1 and H4 and H3 on Unit 1.
4. Connect INPUT and OUTPUT L2 to H1 and H2 on Unit 1.

**BASE: 1 x TX-B2-015H-115216 | 150 VA each**

**Use this diagram only with 240/480 V primary / 24/48 V secondary.**

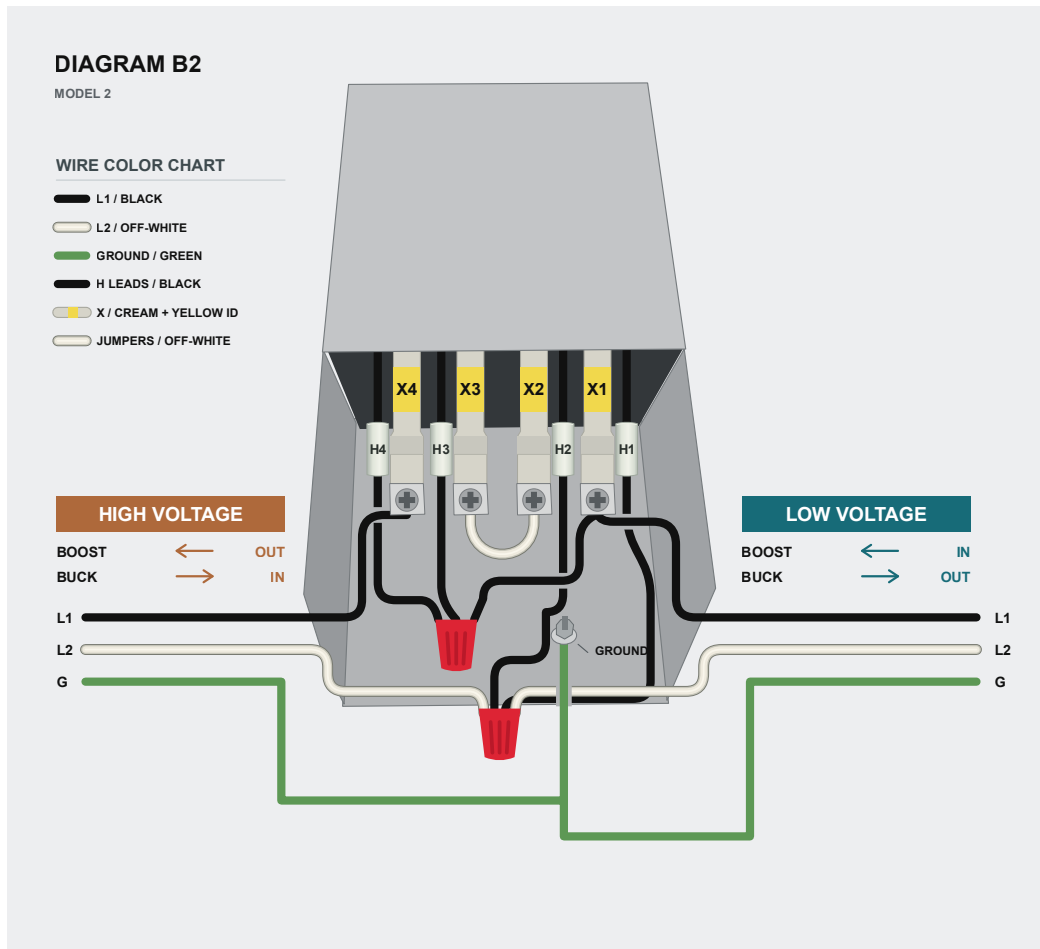

**Drawing: LOW VOLTAGE = 230 V OUTPUT; HIGH VOLTAGE = 277 V INPUT.**

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.