

## Connection Guide

1. Connect **X2** and **X3** together
2. Connect **H2** and **H3** together
3. Connect High Voltage **L1** to **X4**
4. Connect Low Voltage **L1** to **H4** and **X1**
5. Connect High & Low Voltage **L2** to **H1**

### DIAGRAM D2




## Diagram D2 Wiring — Lead Wire &amp; Lug Terminals

**Step 1** Connect X2 and X3 together with jumper wire




**Step 2** Connect H2 and H3 together with jumper wire

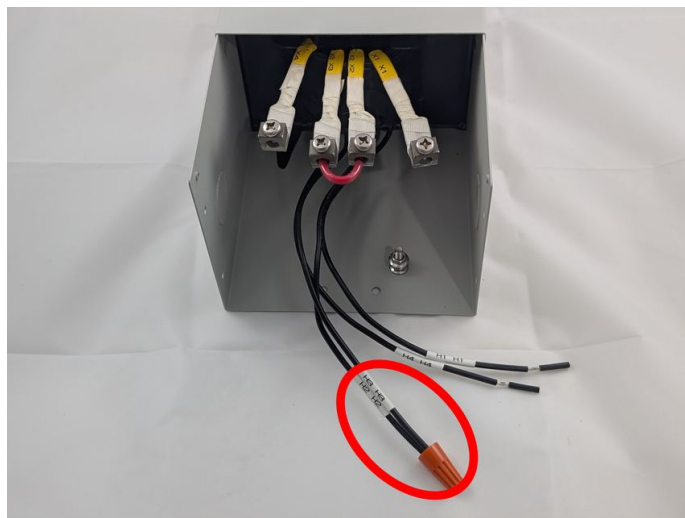

**Step 3** Connect High Voltage L1 to X4




**Step 4** Connect Low Voltage L1 to H4 and X1

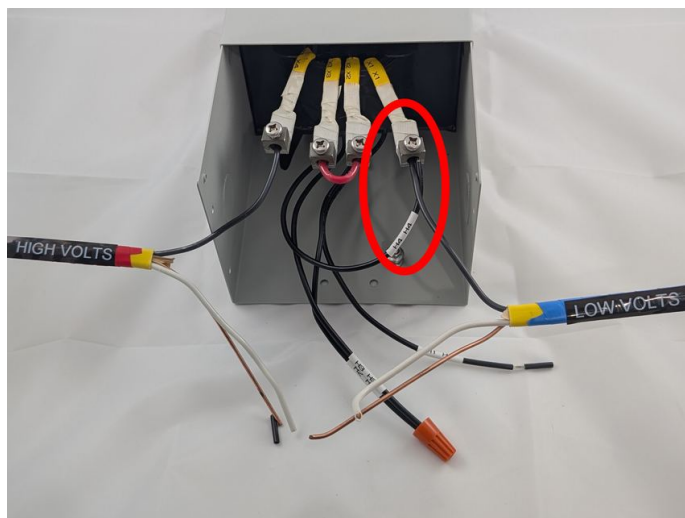

**Step 5** Connect High & Low Voltage L2 to H1



## Final Installation — Verify Connections

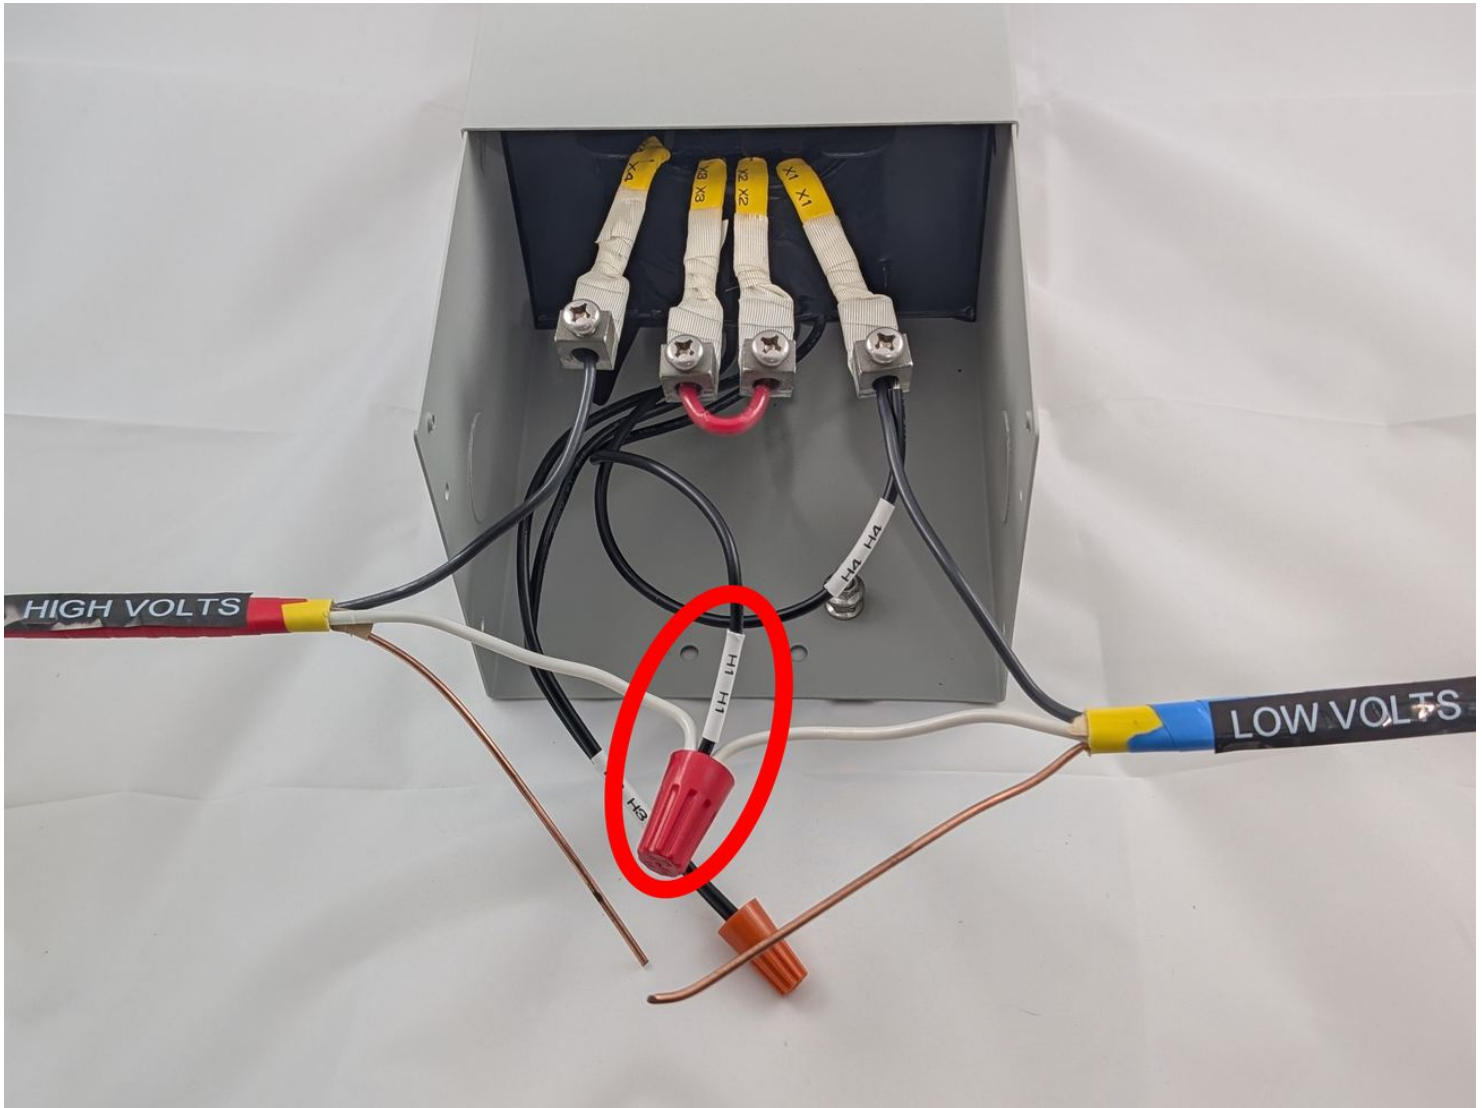

TX-BB-480V-440V-9KVA — Diagram D2 — Completed Wiring