

## Diagram H2 | 504 V input to 480 V nominal output


Three phase delta | Primary series / secondary parallel | Buck

**Continuous output rating: 10.94 A | Calculated output: 480.00 V**

1. Join X4 and X3 on each unit.
2. Join X2 and X1 on each unit.
3. Connect 504 V INPUT A to X4 and X3 on Unit 1.
4. Connect 504 V INPUT C to X4 and X3 on Unit 2.
5. Connect 480 V OUTPUT A to X1 and H4 and X2 on Unit 1.
6. Connect 480 V OUTPUT C to X1 and H4 and X2 on Unit 2.
7. Join H2 and H3 on each unit.
8. Connect INPUT and OUTPUT B to H1 on Unit 1.
9. Bridge B connections between all units.

**BASE: 2 x TX-B2-050H-115216 | 500 VA each**

**Use this diagram only with 240/480 V primary / 24/48 V secondary.**

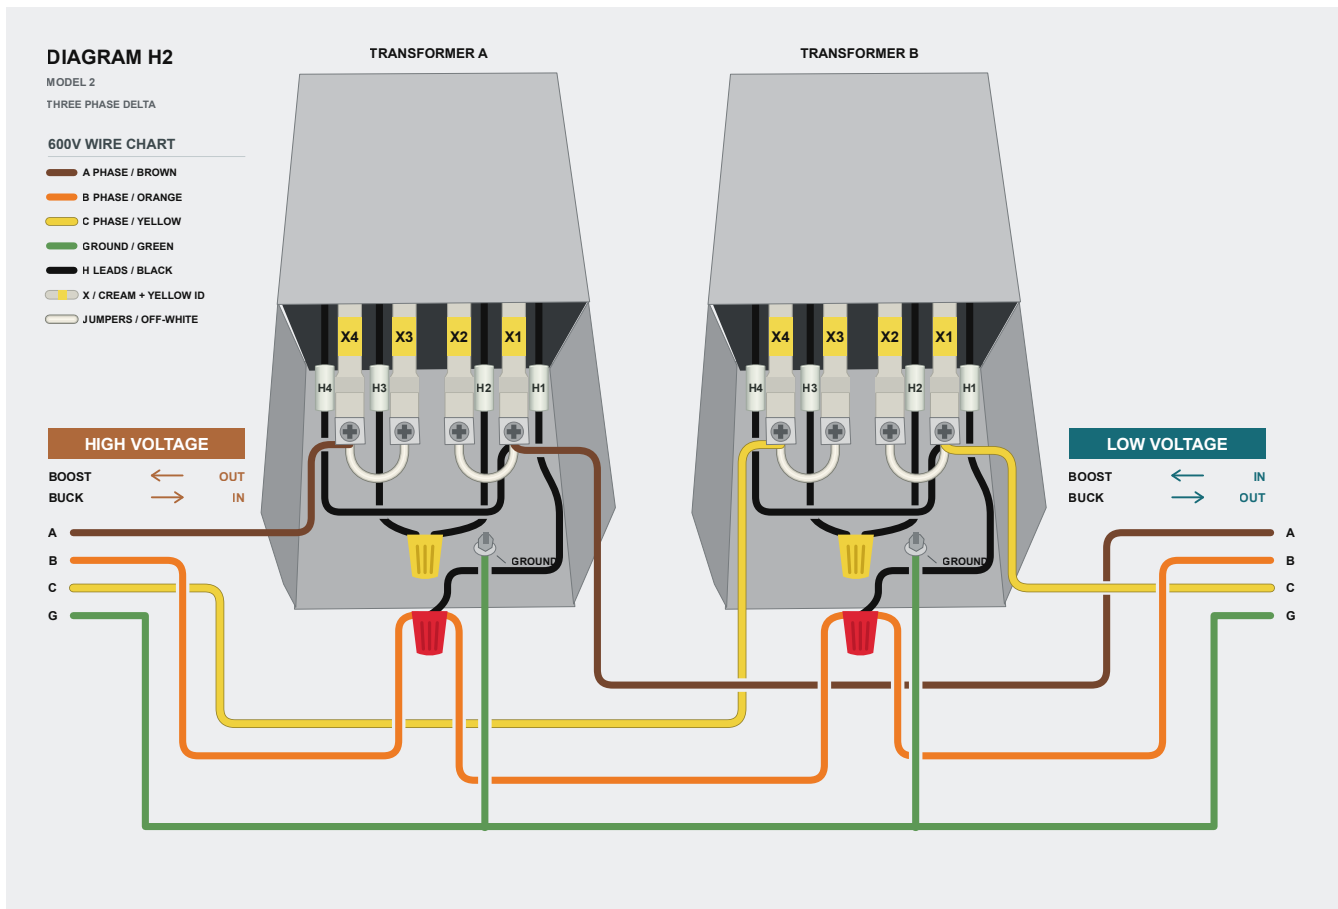

**Drawing: LOW VOLTAGE = 480 V OUTPUT; HIGH VOLTAGE = 504 V INPUT.**

Disconnect power and verify de-energized before wiring. Bond every enclosure to equipment ground.

Follow the terminal identifiers shown; H2/H3 and X2/X3 differ from some other manufacturers.

Verify input and all output voltages before connecting the load. No circuit isolation is provided.

This connection does not create a neutral. Installation must be performed by a qualified electrician.